
# **SPECIFICATIONS**


"Preliminary data"

**Model Number:** CR0412HB-D51





# **Mechanical Drawing:**

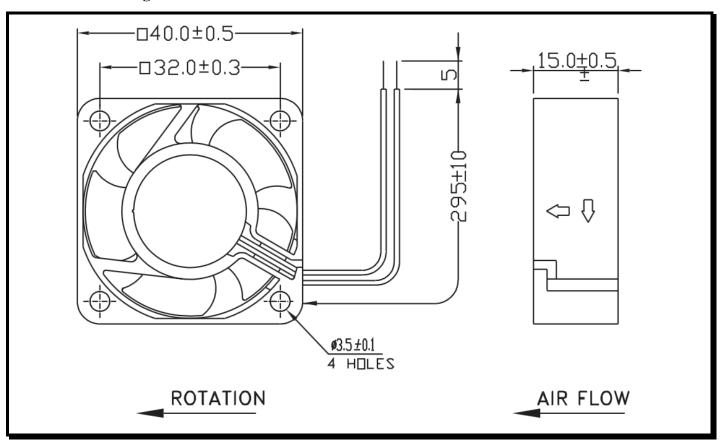

#### Motor:

Nominal Voltage = 12 VDC Nominal Running Current = 0.11 AmpsPower Input = 1.32 Watts Speed = 8000 RPMBearings = BallAir Flow = 8.48 CFMStatic Pressure: = 0.25 Inch of H2O

Acoustic  $= 36.0 \, dB(A)$ Weight = 27.0 g

#### **Construction:**

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

## **Life Expectancy:**

This fan is designed for continuous duty life of 70,000 hours at 40°C.

## **Additional Features:**

Brushless DC Motor Locked Rotor Protection Polarity Protected

**Automatic Restart Capability** 

-10° C to 70° C Operating Temperature: Storage Temperature: -40° C to 70° C

#### **Termination:**

 $295\pm10$  mm Lead wires, AWG 26, UL 1007

**Agency Approvals:** UL, CUL, TUV, CE