
SPECIFICATIONS

"Preliminary data"

Model Number: Part Number: CR0812HB-D9*GP 17000189A Version: Apr 11, 2017



Mechanical Drawing:

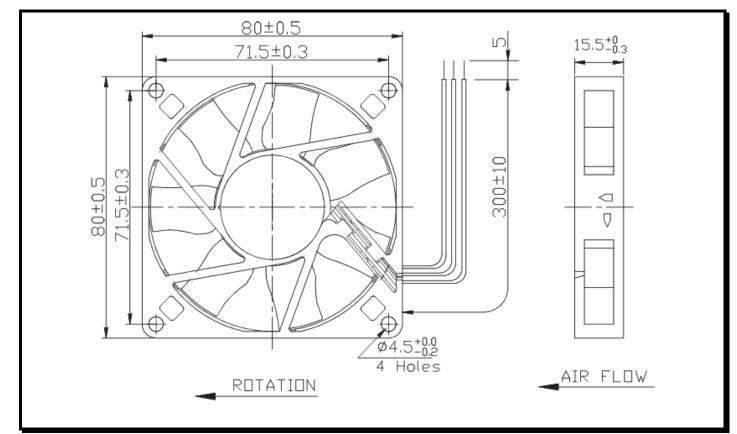

Motor:

Nominal Voltage	= 12 VDC
Nominal Running Current	= 0.13 Amps
Power Input	= 1.56 Watts
Speed	= 3000 RPM
Bearings	= Ball
Air Flow	= 35.52 CFM
Static Pressure:	= 0.13 Inch of H2O
Acoustic	= 35.8 dB(A)
Weight	= 63.0 g

Construction:

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

This fan is designed for continuous duty life of 70,000 hours at 40° C.

Additional Features:

Brushless DC MotorLocked Rotor ProtectionPolarity ProtectedAutomatic Restart CapabilityOperating Temperature:-10° C to 70° CStorage Temperature:-40° C to 70° C

Termination:

 300 ± 10 mm Lead wires, AWG 24, UL 1007

Agency Approvals: UL, CUL, TUV, CE