SPECIFICATIONS


"Preliminary data"

Model Number: CR0812UB-Y51(NCU)

Part Number: 17000192A Apr 11, 2017



Mechanical Drawing:

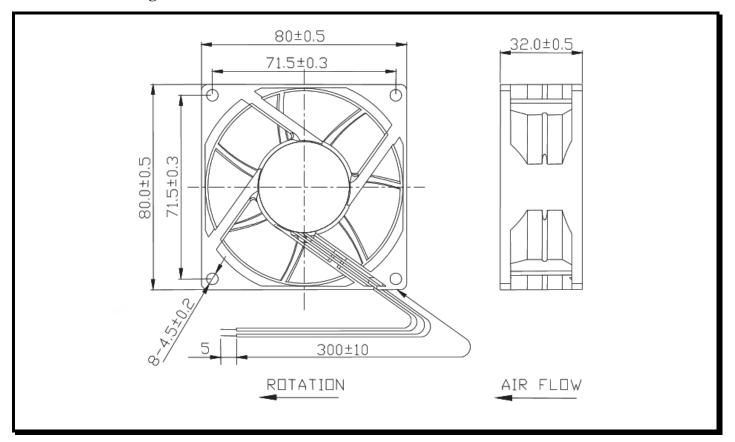

Motor:

Nominal Voltage = 12 VDC Nominal Running Current = 0.23 Amps Power Input = 2.76 Watts Speed = 4200 RPMBearings = Ball

Air Flow = 52.39 CFMStatic Pressure: = 0.32 Inch of H2O Acoustic $= 44.0 \, dB(A)$

Weight = 108.0 g

Construction:

Housing: UL94V-0 Glass Filled Polyester (P.B.T) Impeller: UL94V-0 Glass Filled Polyester (P.B.T)

Life Expectancy:

hours at 40°C.

This fan is designed for continuous duty life of 70,000

Additional Features:

Brushless DC Motor Locked Rotor Protection Polarity Protected

Automatic Restart Capability

Version:

-10° C to 70° C Operating Temperature: Storage Temperature: -40° C to 70° C

Termination:

 300 ± 10 mm Lead wires, AWG 24, UL 1007

Agency Approvals:

UL, CUL, TUV, CE