

# SPECIFICATIONS


(RoHS Compliant)

**Model Number:** CLE2T2  
**Part Number:** 19020189A

**Version:** 01  
**June 24, 2016**



## Mechanical Drawing:

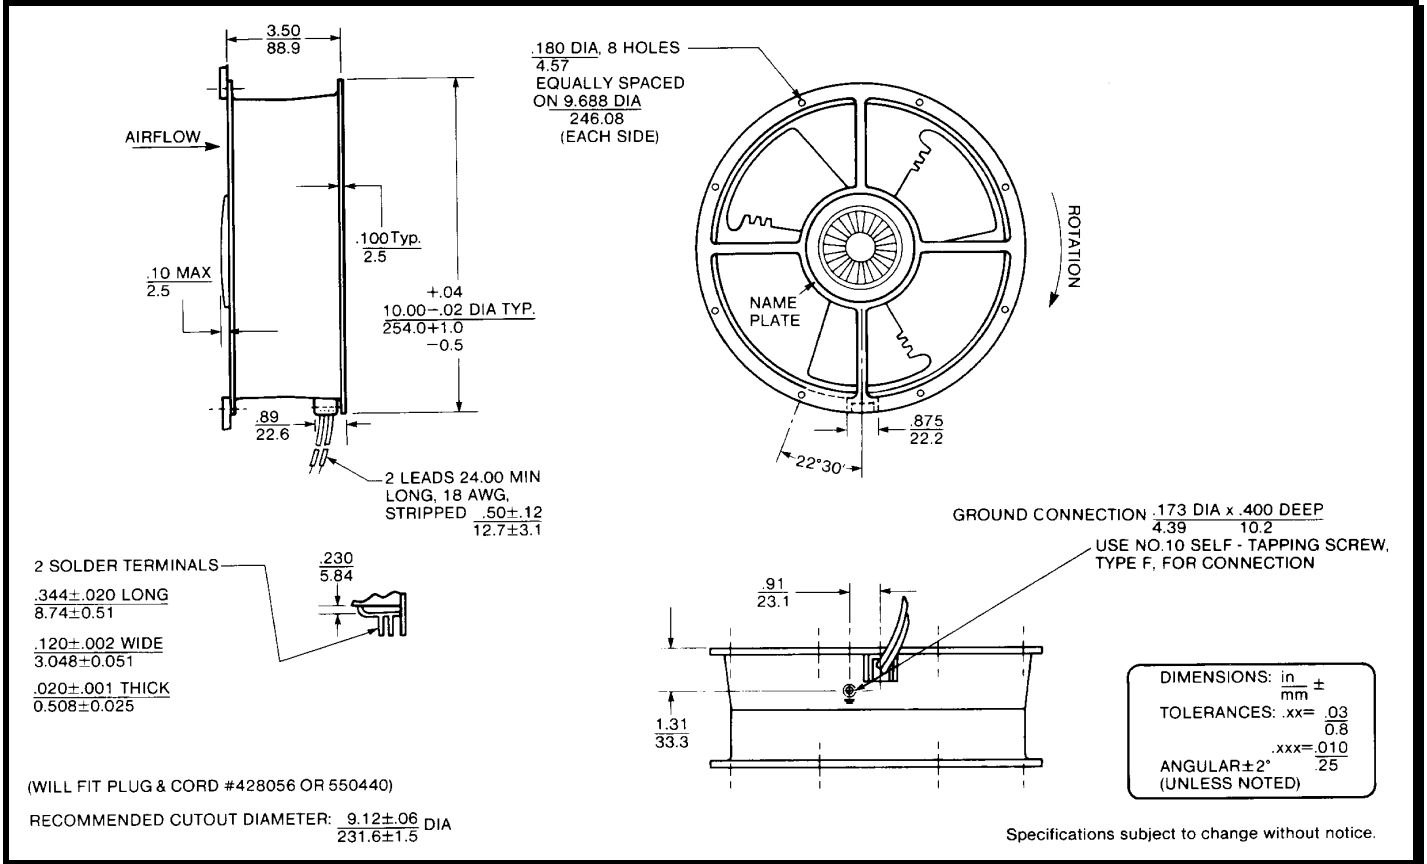

### Motor:

Nominal Voltage = 115 VAC  
 Frequency = 50 / 60 Hz  
 Nominal Running Current = 0.48 / 0.50 amps  
 Max. Locked Rotor Current = 1.00 amps  
 Running Power = 67 / 61 Watts  
 Average Speed = 1400 / 1650 RPM  
 Bearings = Ball  
 Air Flow = 455 / 550 CFM  
 Acoustic: = 45.4 / 49.2 dBA

### Construction:

Venturi: Aluminum, Black  
 Propeller: Plastic, Black, UL 94V-0

### Life Expectancy:

This fan is designed for continuous duty life of 46,000 hours at 70°C.

### Additional Features:

Permanent Split Capacitor Motor  
 Automatic Reset Thermal Protector  
 Class A Insulation  
 Feathered Edge Propeller  
 Operating Temperature: -10°C to 70°C  
 Storage Temperature: -40°C to 85°C

### Termination:

2x0.12" Terminals

### Agency Approvals:

UL, CUL, CE

**PQ Curve:**

