
SPECIFICATIONS

 Model Number:
 CLE2L5
 Rev: 01

 Part Number:
 19039305A
 Sep 29, 2017



Mechanical Drawing:

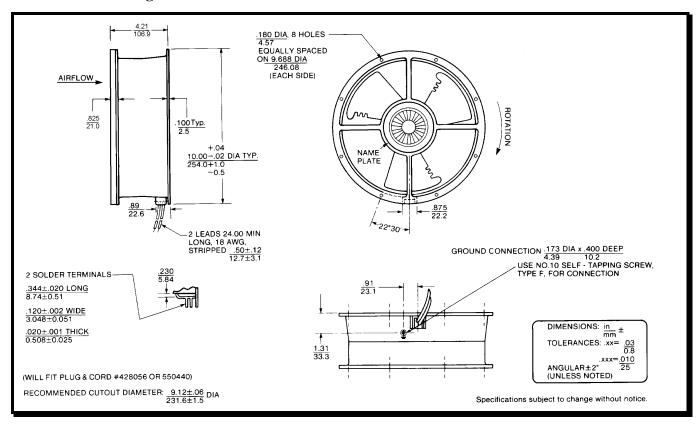

Motor:

 $\begin{array}{lll} \mbox{Nominal Voltage} & = 115 \mbox{ VAC} \\ \mbox{Frequency} & = 50/60 \mbox{ Hz} \\ \mbox{Nominal Running Current} & = 1.11/1.35 \mbox{amps} \\ \mbox{Max. Locked Rotor Current} & = 2.50 \mbox{ amps} \\ \mbox{Running Power} & = 120/150 \mbox{ watts} \\ \mbox{Average Speed} & = 2650/2800 \mbox{ RPM} \end{array}$

Bearings = Ball

Max. Airflow = 878/950 CFM Max. Static Pressure = 0.50/0.57inch H₂O Acoustic = 62.1/63.3 dBA

Construction:

Venturi: Aluminum, Black.

Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of

45,000 hours at 60°C.

Additional Features:

Permanent Split Capacitor Motor Automatic Reset Thermal Protector Automatic Restart Capability

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Termination:

24" Lead wires, 18 AWG, UL 1015

Agency Approvals:

UL, CUL, CE

PQ Curve:

