

Fast Recovery Rectifier

CFRB301 ~ CFRB307

Forward Current: 3.0 Amp

Reverse Voltage: 50 ~ 1000 Volts

Features


- Glass Passivated Die Construction
- Fast Recovery Time for High Efficiency
- Low Forward Voltage Drop and High Current Capability
- Surge Overload Rating to 100A Peak
- Ideally Suited for Automatic Assembly

Mechanical Data

- Case: Molded Plastic
- Case Material: UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish)
- Polarity: Cathode Band or Cathode Notch
- Weight: SMB 0.093 grams (approx)



SMB

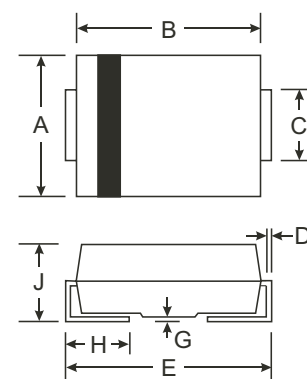

Dim	A	B	C	D	E	G	H	J
Min	3.30	4.06	1.96	0.15	5.00	0.10	0.76	2.00
Max	3.94	4.57	2.21	0.31	5.59	0.20	1.52	2.62

All Dimensions in mm

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	CFRB 301	CFRB 302	CFRB 303	CFRB 304	CFRB 305	CFRB 306	CFRB 307	Unit	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	V	
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V	
Average Rectified Output Current @ $T_T = 75\text{ }^{\circ}\text{C}$	I_O	3.0							A	
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	100							A	
Forward Voltage @ $I_F = 3.0\text{A}$	V_{FM}	1.3							V	
Peak Reverse @ $T_A = 25\text{ }^{\circ}\text{C}$ at Rated DC Blocking Voltage @ $T_A = 125\text{ }^{\circ}\text{C}$	I_{RM}	5.0 250							μA	
Maximum Recovery Time (Note 3)	t_{rr}	150				250		500		ns
Typical Junction Capacitance (Note 2)	C_j	50							pF	
Typical Thermal Resistance Junction to Terminal (Note 1)	$R_{\theta JT}$	25							K/W	
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150							$^{\circ}\text{C}$	

2

- Notes:
1. Thermal resistance: junction to terminal, unit mounted on PC board with 5.0 mm (0.013 mm thick) copper pad as heat sink.
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 3. Reverse recovery test conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$. See figure 5.

Fast Recovery Rectifier

COMCHIP
SMD DIODE SPECIALIST



CFRB301 ~ CFRB307

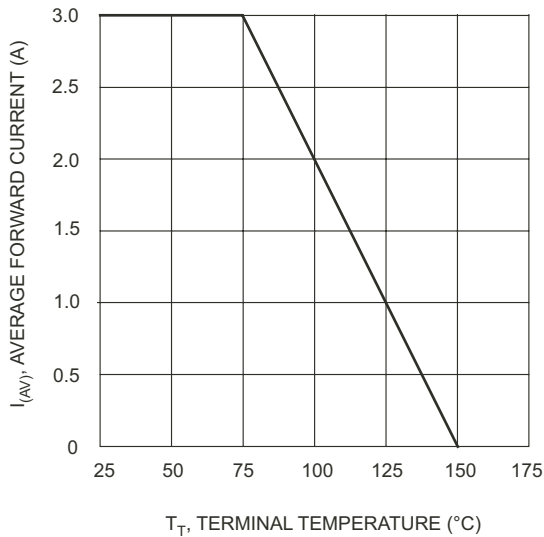


Fig. 1 Forward Current Derating Curve

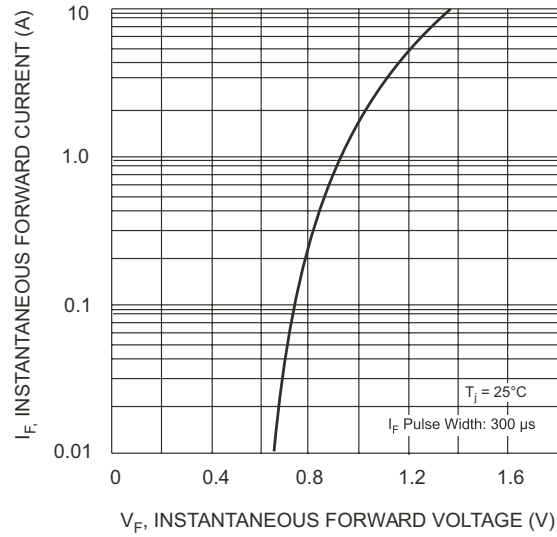


Fig. 2 Typical Forward Characteristics

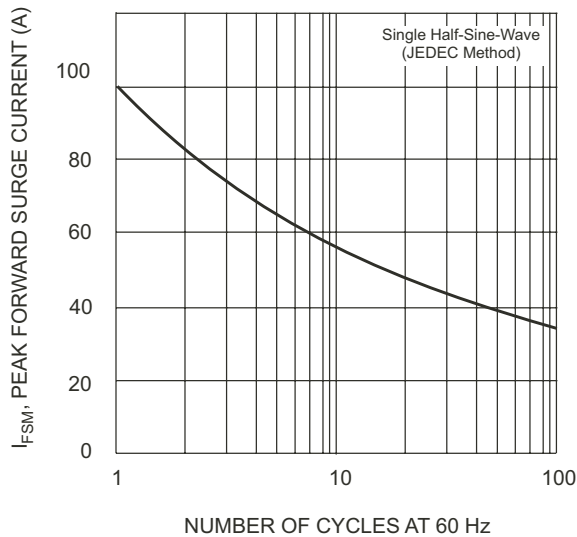


Fig. 3 Forward Surge Current Derating Curve



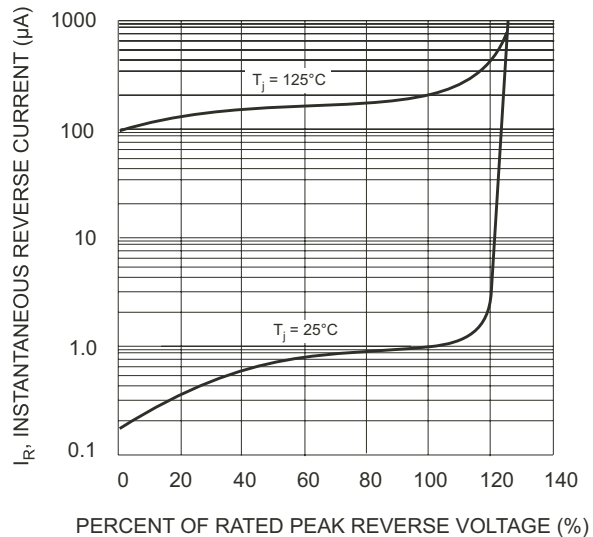


Fig. 4 Typical Reverse Characteristics

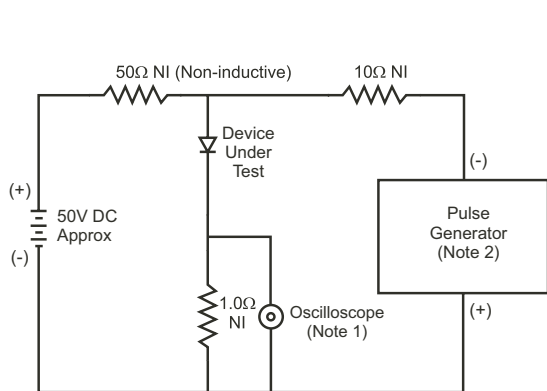

- Notes:
1. Rise Time = 7.0ns max. Input Impedance = 1.0M Ω , 22pF.
2. Rise Time = 10ns max. Input Impedance = 50 Ω .

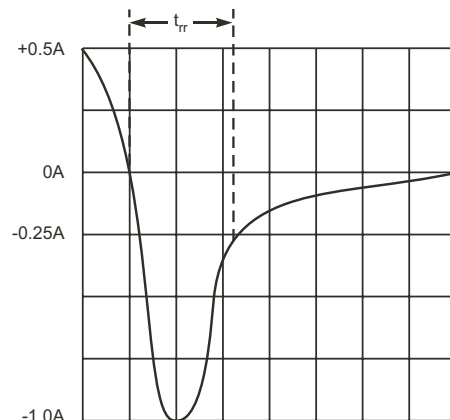

Set time base for 50/100 ns/cm

Fig. 5 Reverse Recovery Time Characteristic and Test Circuit