


STRIPPING DIMENSIONS

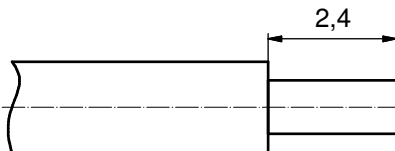

NOTES:

- Material: phosphor bronze
- Finish: Gold Flash over Nickel in the contact area
- Temperature range: -55°C to +125°C
- Rated current: 5.0A
- Contact resistance: <= 10mOhm
- Length of reel-small reel wheeled right: 500 Contacts
- Crimping: use crimp tool 360X10079X

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		dim. in mm	
date	name	date	name
drawn 18.01.11	Henneboel		
appd. 18.01.11	Koch		
norm			
d-old			

scale:	10:1		
material:			
title:	SOCKET CONTACT CRIMP AWG 24-28 (small spool wheeled right)		
dwg no:	16K1A2761	DIN-A3	sh: 1
part no:	161A13429X		

