


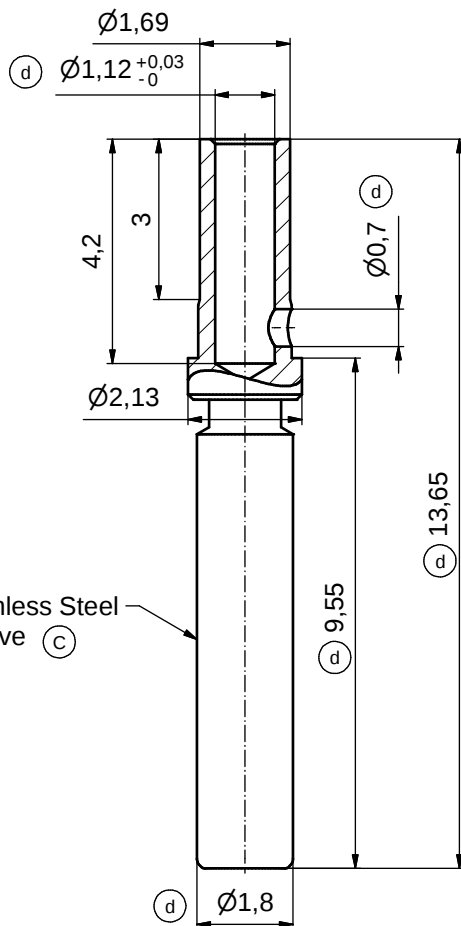


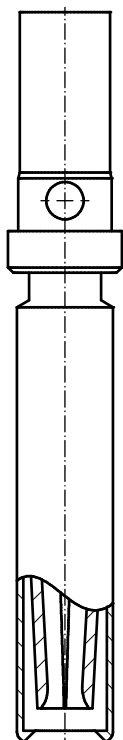

Stainless Steel Sleeve (c)

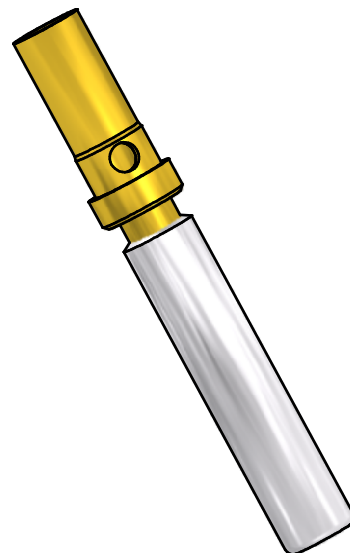

(b) STRIPPING DIMENSIONS

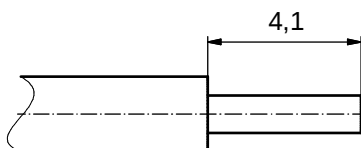

Plating	Part no.	Part no. North America
GOLD FLASH over NICKEL	132A15019X	162A18709X
min. 30µin HARD GOLD over min. 50µin NICKEL	132C15019X	162C18709X
min. 50µin HARD GOLD over min. 50µin NICKEL	132J15019X	162J18709X

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
3. CRIMPING: USE CRIMP TOOL 360X10329X WITH TOOL INSERT 360X20039X
SELECTOR SETTINGS: 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish: SEE NOTES				tolerance ISO 2768-m		 dim. in mm
					date	
				drawn	30.01.02	Parei
2 x e	Ä 4145	26.10.11	Lehm.	appd.	30.01.02	Mickenbecker
6 x d	Ä 2532	12.07.06	HS	norm		
2 x c	Ä 2193	21.03.05	Lehm.	d-old		
2 x b	Ä 2177	02.03.05	Lehm.			
a	Original					
rev.	description	date	name			

CONEC

scale: 10:1	
material: SEE NOTES	
title: SIGNAL CRIMP CONTACT SOCKET CONTACT Wire Size 20-24	
dwg no:	Inventor 10 (d) DIN-A3 sh: 1
part no: SEE TABLE	