


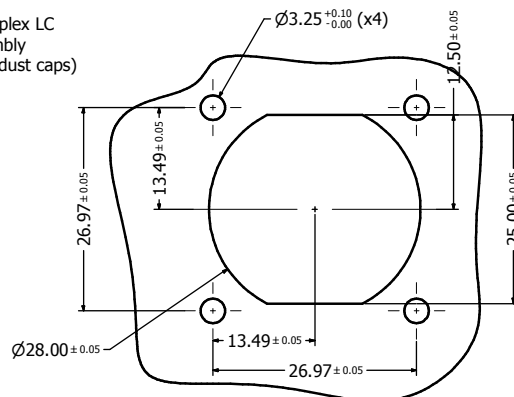


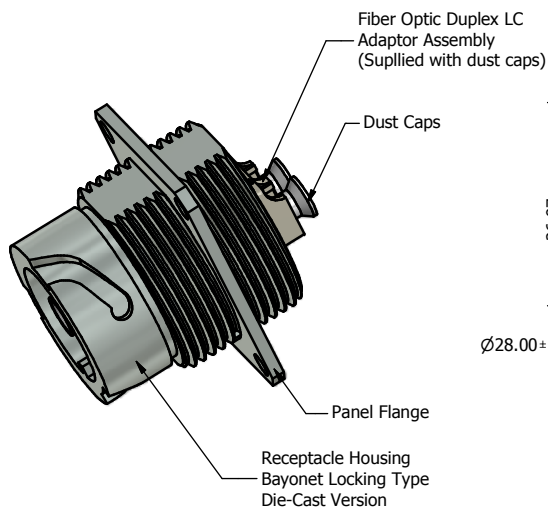




Recommended Double-D Panel Cutout

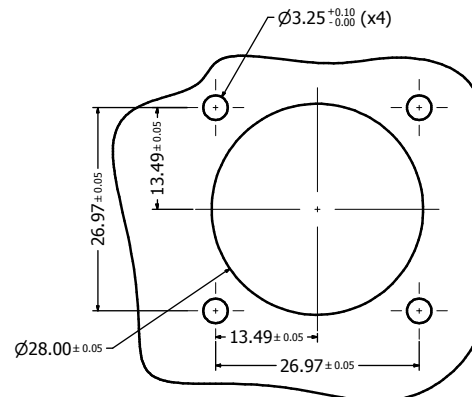

Recommended Round Panel Cutout



Bayonet Channel x 3

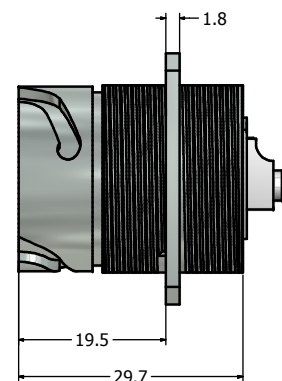

Notes:

- Material and Finish:
 - Receptacle Housing: Die-Cast, Nickel Plated
 - Duplex LC Adaptor Assembly:
 - Housing: Mod. PPO, UL94 V-0, Color: **SM Blue/MM Beige/APC SM Green**
 - Alignment Sleeves: SM Ceramic/MM Phosphor Bronze
 - Dust Cap: PP, Color: Neutral transparent
 - Operating Temperature: -40°C to +85°C
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- IP67 rated when covered or fully mated with the appropriate mating connector

- ⑥ The panel gasket (P/N: 17-103540) and the M3 mounting hardware (P/N: 17-103530) must be ordered separately, the recommended mounting torque is 12 to 14 lb-inch

Description	Part Number
Single Mode (SM)	17-300440
Multi Mode (MM)	17-300450
APC Single Mode (APC SM)	17-300460

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION OF CONEC CORPORATION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION.	DO NOT ALTER CAD DRAWING BY HAND			Customer:			Tolerance Unless otherwise specified				Scale:		Dim. in mm						
				Name		Title		Approval Date			0 PLC ±0.30 1 PLC ±0.20 2 PLC ±0.10 3 PLC ±0.05 ANGLES ±1°			Autodesk Inventor					
											2011			Date		Name			
											Draw.			Nov. 09		Vincent Ke			
										Appd.			Nov. 09		J. Chaudry				
										Norm									
										D-old									
				b			1 x b			Apr/23/2012			Vincent ke			Drawing No.: 17K1A304		DIN A3	
				a			original											Sheet 1/1	
				Rev.			Changes			Date			Name			Part No.: SEE PART NUMBER TABLE			
																			

A

Sheet 1/1