

SENSOR-ACTOR-SPLITTER FOR FOOD & BEVERAGE INDUSTRY

4-fold Junction box with homerun-cable,
stainless steel housing, I/O-ports 4-pos + Ground




TECHNICAL DATA


Rated voltage	30V
Rated voltage display	LED-display green
Current rating	2A per signal contact/ 9A Total ampacity
Pollution degree	3/2
Insulation resistance	= 10 ⁹ Ω
Degree of protection	IP67 in mated condition
Temperature range	-30°C to +85°C
Mating cycles	<=100

Directive 2002 95 EC
„RoHS“
Compliant

CONTACT ASSIGNMENT

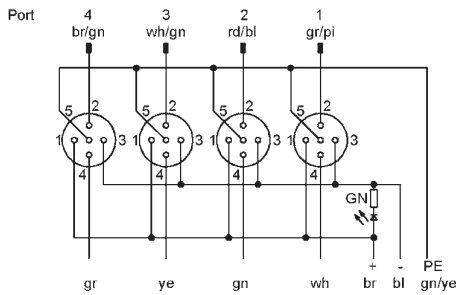

DIMENSION DRAWING

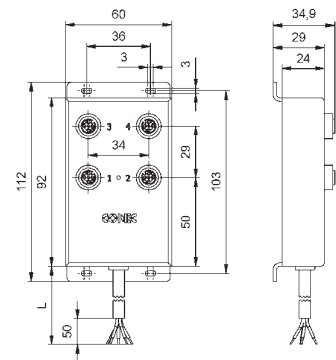

ORDER DATA

Cable	Length/L	Description	5-pos Part-no.
PVC, halogenfree black, LiYY	5m	SAL-FB-12-4FK5-1L-5/A2	43-05000
8x0,34/3x1,0	10m	SAL-FB-12-4FK5-1L-10/A2	43-05001

For custom length or quality levels contact factory.