


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
4. THREADED SPACER CLIPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
PCB-HOLE: $\varnothing 3.1 \pm 0,1$; PCB THICKNESS 2,3mm
5. COLLARS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. P.C.B. HOLE DRILLINGS ON SHEET 2
8. CONNECTOR IS PART MARKED: DSS3XPRAA15X CONEC ABC

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		dim. in mm	scale: 2:1 (5:1)	
				date			material: SEE NOTES	
DO NOT ALTER CAD DRAWING BY HAND				drawn	16.12.09	Lehmenkühler	title: D-SUB MALE 25pos. SOLDER PIN STRAIGHT with threaded spacer clip	
				appd.	16.12.09	Kühle		
				norm				
				d-old				
a	Origin			CONEC ®		dwg no: Inventor 10		DIN-A3
rev.	description	date	name	16K1A2574-NA		part no: DSS3XPRAA15X North American Version		sh: 1

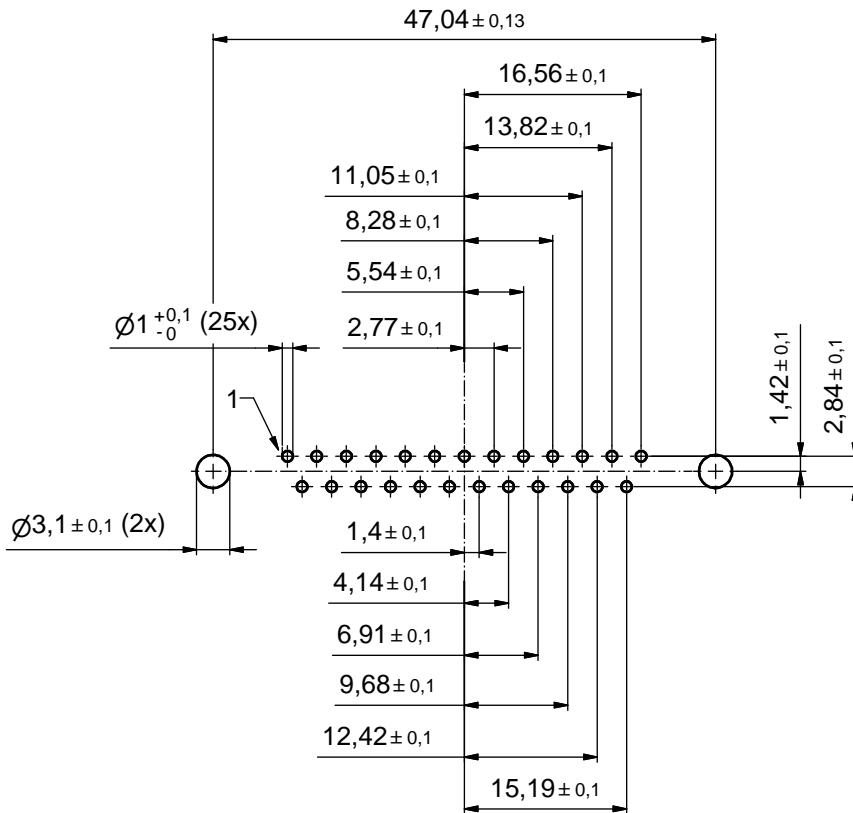

PCB TOP SIDE

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm									
DO NOT ALTER CAD DRAWING BY HAND				date	name										
a	Origin			drawn	16.12.	Lehmenkühler									
rev.	description	date	name	appd.	16.12.	Kühle									
				norm											
				d-old											
				<table border="1"> <tr> <td>dwg no:</td> <td>Inventor 10</td> <td>DIN-A3</td> </tr> <tr> <td>part no:</td> <td>16K1A2574-NA</td> <td>sh: 2</td> </tr> </table>			dwg no:	Inventor 10	DIN-A3	part no:	16K1A2574-NA	sh: 2			
				dwg no:	Inventor 10	DIN-A3									
part no:	16K1A2574-NA	sh: 2													
				<table border="1"> <tr> <td>scale:</td> <td colspan="2">2:1</td> </tr> <tr> <td>material:</td> <td colspan="2">SEE SHEET 1</td> </tr> <tr> <td>title:</td> <td colspan="2">P.C.B. HOLE DRILLINGS D-SUB MALE 25pos. SOLDER PIN with threaded spacer clip</td> </tr> </table>			scale:	2:1		material:	SEE SHEET 1		title:	P.C.B. HOLE DRILLINGS D-SUB MALE 25pos. SOLDER PIN with threaded spacer clip	
scale:	2:1														
material:	SEE SHEET 1														
title:	P.C.B. HOLE DRILLINGS D-SUB MALE 25pos. SOLDER PIN with threaded spacer clip														

scale:	2:1	
material:	SEE SHEET 1	
title:	P.C.B. HOLE DRILLINGS D-SUB MALE 25pos. SOLDER PIN with threaded spacer clip	
dwg no:	Inventor 10	DIN-A3
part no:	16K1A2574-NA	sh: 2
scale:	2:1	
material:	SEE SHEET 1	