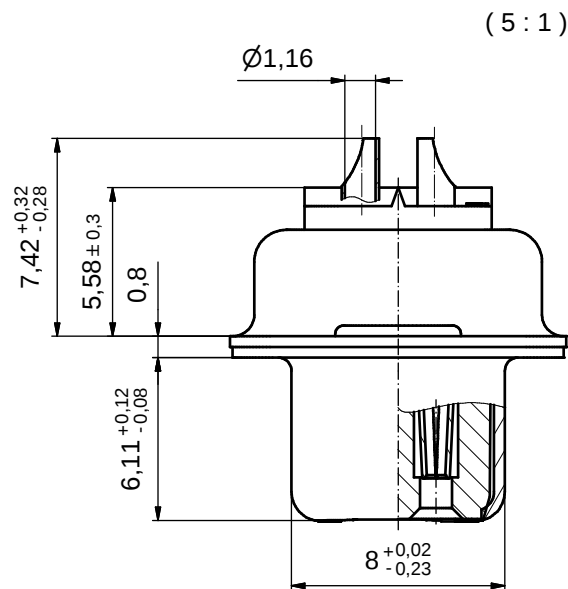
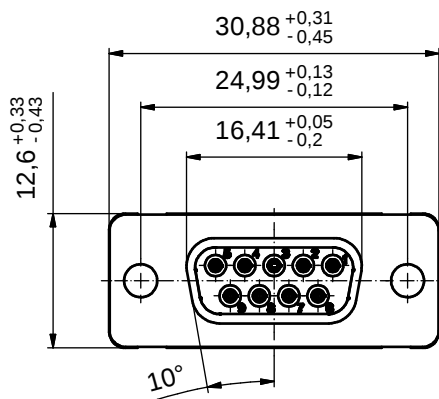


NOTES:

1. METALSHELLS: STAINLESS STEEL;
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 50µin HARD GOLD over min. 50µin NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. CONNECTOR IS PART MARKED: **DSSGXSMJD01X CONEC ABC**

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		scale: 2:1 (5:1)	
				ISO 2768-m		material: SEE NOTES	
					dim. in mm	title: D-SUB MALE 9pos. SOLDER CUP	
				date	name		
				drawn	03.03.2008 Sonnenberg		
				appd.	03.03.2008 Kühle		
				norm		dwg no: Inventor 10	
				d-old			
				a	Origin	16K1A2250	
				rev.	description		
				date	name	part no: DSSGXSMJD01X	

CONEC®

DIN-A3	
sh: 1	