



Sub-bases for miniature control valves

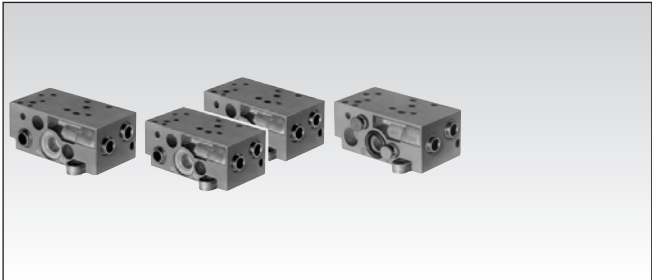

Part numbers			
Mounting		Machine (individual)	Machine (in bank)
Version		single	end bases (pair)
Connection	push-in for semi-rigid tubing	Ø 6 mm	Machine (in bank)
	tapped	1/8 BSP	intermediate
		81 518 010	81 518 110
		81 518 020	81 518 120
			81 518 210
			81 518 220

Characteristics			
Mounting		2 screws M4	2 screws M4
Weight		g	222
Connections	Pneumatic		444
			235

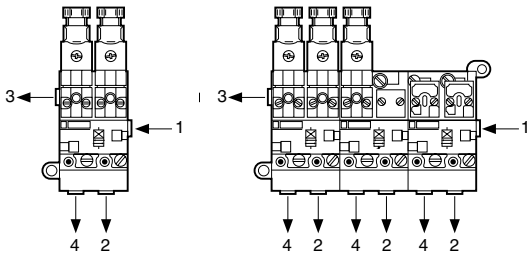

- 1 - Supply

2 - Output at rest (NO)

3 - Exhaust

4 - Output operating (NC)
- 1 - Supply common

2 - Output at rest (NO)

3 - Common exhaust

4 - Output operating (NC)
- 2 - Output at rest (NO)


4 - Output operating (NC)

Note:
can be used with
'diabolos'

For optimum flow, a
maximum of 6 valves
can be mounted on
the manifold

Note:
1 set comprising:
1 supply sub-base
1 exhaust sub-base

Dimensions with miniature control valves 81 516 (page 5/8) + miniature solenoid valves (page 5/4) + connectors (5/11)

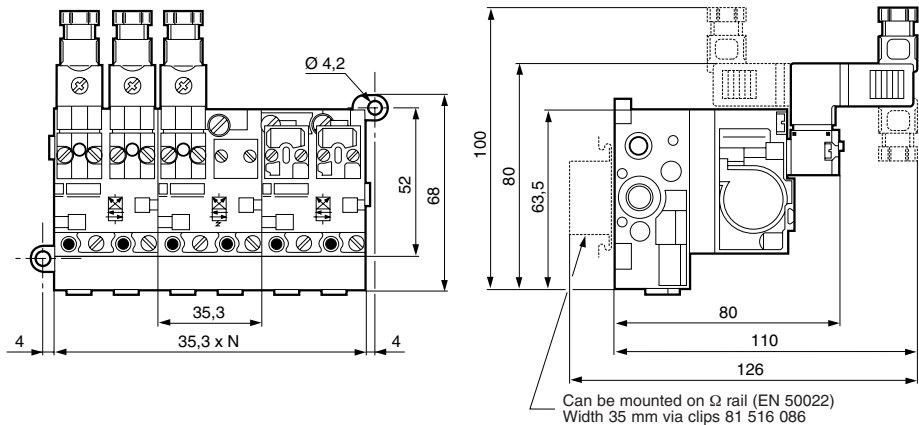

Other information	To order, specify :
	Standard products
	Standard products, non stocked
	1 Part number
	Example : Sub-base for miniature control valve - 81 518 010

Products and specifications subject to change without notice.
Consult factory for application assistance.