



## EUL/EUH AC/DC voltage control EUH Part number 84872033



- Voltage monitoring
- 2 relays to cover 6 ranges of measurement : 0.2V to 600V
- Automatic recognition AC/DC
- Frequency up to 500 Hz

### Part numbers


	Type	Measurement range	Supply voltage
84 872 020	EUL	0,2 →60 V	24 V DC
84 872 021	EUL	0,2 →60 V	24 V AC
84 872 023	EUL	0,2 →60 V	120 V AC
84 872 024	EUL	0,2 →60 V	230 V AC
84 872 030	EUH	15 →600 V	24 V DC
84 872 031	EUH	15 →600 V	24 V AC
84 872 033	EUH	15 →600 V	120 V AC
84 872 034	EUH	15 →600 V	230 V AC

### Specifications

Supply voltage Un	
Operating range	0,85 1,15 Un
Maximum power consumption	3 VA / 1 W
Frequency of measured signal	40 500 Hz
Threshold Ue	Adjustment from 10 to 100 % of the measurement range
Hysteresis	Adjustment from 5 to 50 % of the displayed threshold
Display precision	± 10 % of the full scale
Delay on threshold crossing Tt	0,1 3 s ±10 %
Output relay	1 AgNi changeover, 8 A max
Temperature Use (°C)	-20 →+60
Storage temperature (°C)	-30 →+70

Inputs	
Sensitivity	E1-M : 15 to 150V E2-M : 30 to 300V E3-M : 60 to 600V
Input resistance	E1-M : 100kΩ E2-M : 300kΩ E3-M : 600kΩ

### Principles

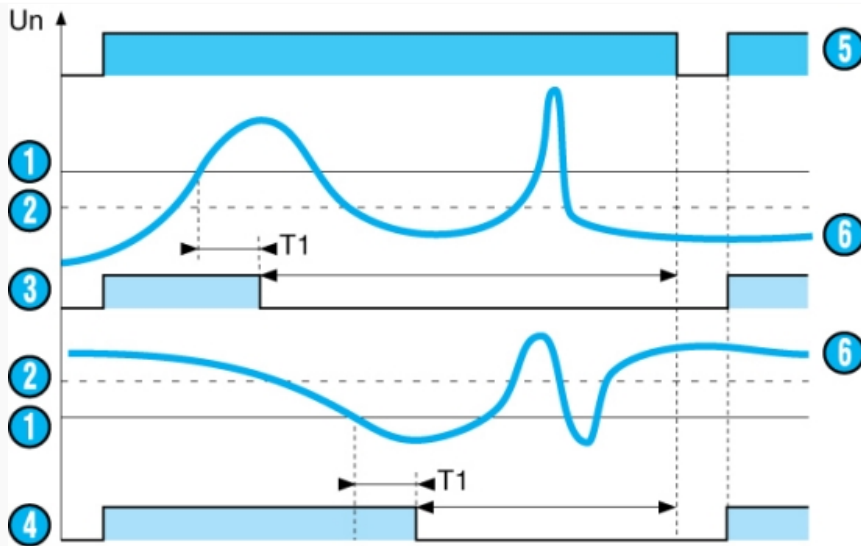


When the value of the controlled voltage, AC or DC, reaches the threshold  $U_e$  displayed on the front face, the output relay changes state at the end of a time delay  $T_1$ , which can be set on the front face at between 0.1 and 3s.

Once the voltage drops below 5 to 50 % of the threshold (hysteresis), the output relay changes state again instantly. Changing the hysteresis on the front face does not therefore modify the value of the preset threshold.

N°	Legend
1	Threshold $U_e$
2	Hysteresis
3	UPPER function
4	UNDER function
5	Unit power-up
6	Controlled voltage
7	*** TRADUCTION MANQUANTE ***

**Principles**

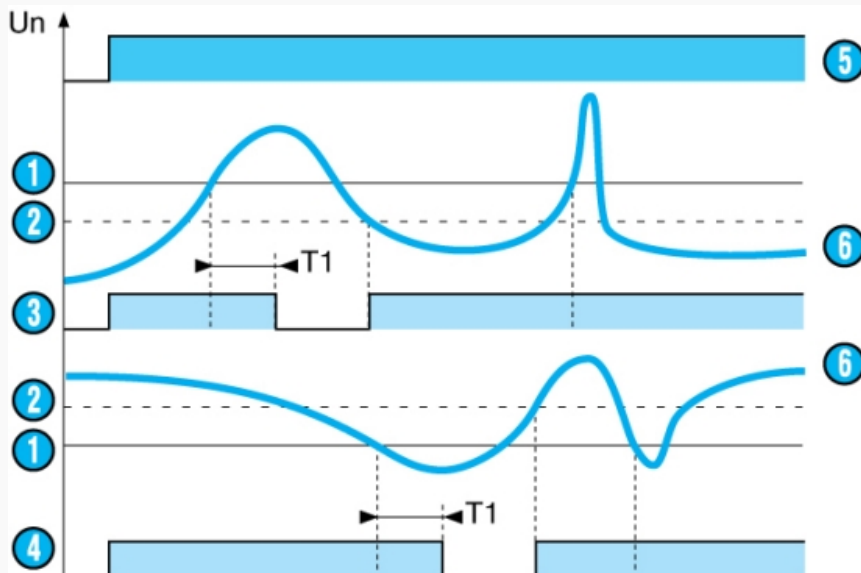


When the value of the controlled voltage, AC or DC, reaches the threshold  $U_e$  displayed on the front face, the output relay changes state at the end of a time delay  $T_1$ , which can be set on the front face at between 0.1 and 3s and remains latched in this position.

N°	Legend
1	Threshold $U_e$
2	Hysteresis
3	UPPER function

①	UNDER function
②	Unit power-up
③	Controlled voltage


**Dimensions (mm)**

EUL / EUH

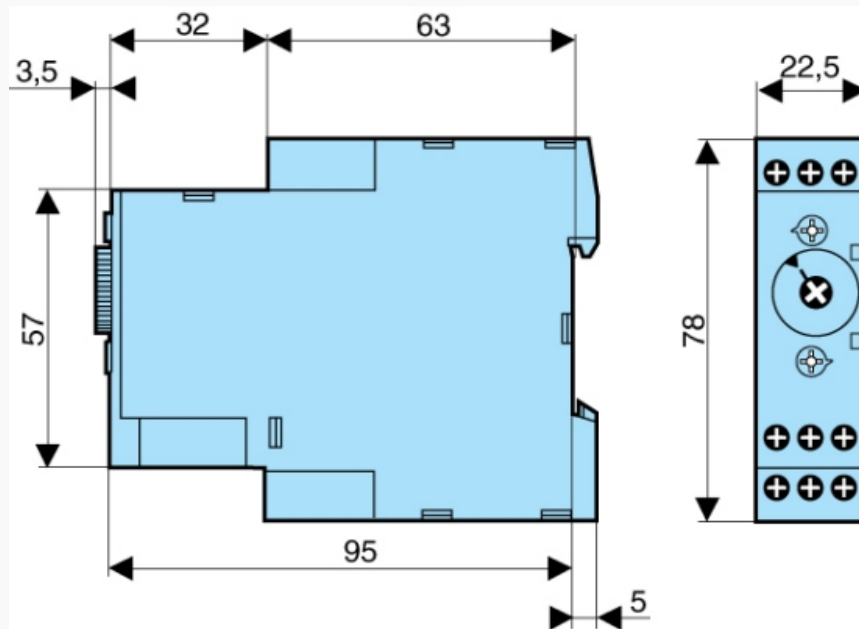

**Connections**


CA EUH DU\_C01

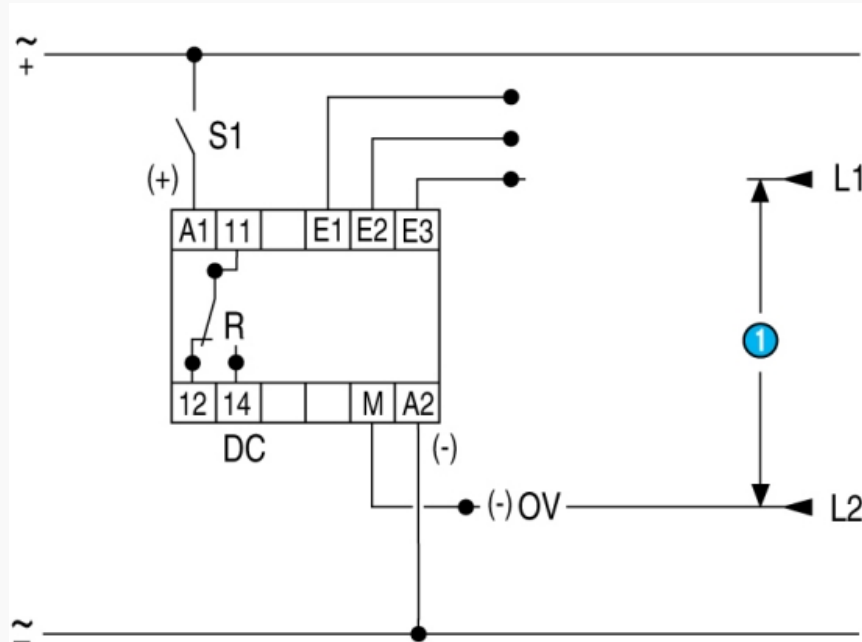


N°	Legend
①	*** TRADUCTION MANQUANTE ***

**Connections**

CA EULH\_C01

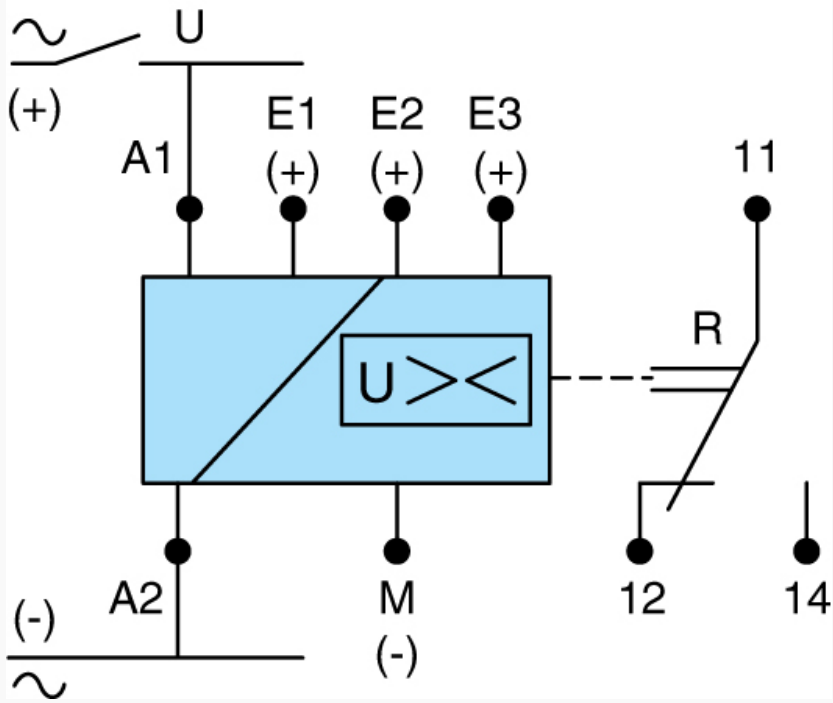

N°	Legend
	*** TRADUCTION MANQUANTE ***