

2108H SERIES ELAPSED TIME INDICATOR

- 6 Digit .3" High LCD Display
- 4 Selectable Time Ranges
 - Hours, 1/10 Hours
 - Minutes, 1/10 Minutes
 - Seconds, 1/10 Seconds
 - Hours, Minutes, Seconds




GENERAL FEATURES:

The 2108H Series is an elapsed time indicator in a DIN-sized 24 x 48mm (.95" x 1.89") enclosure. Unit is compact with a 37.5mm (1.48") depth. The start/stop input can be a contact closure or an NPN open collector transistor. The unit is powered by a replaceable lithium battery.



WIRING:

- 87 610 440
- 1- Reset Input
 - 2- Enable Reset
 - 3- Common
 - 4- Prog.
 - 5- Start/Stop



SPECIFICATIONS:

| | |
|------------------------------------|--|
| Power Supply | Replaceable lithium battery, 5 year life |
| Display | 6 Digit LCD |
| Display height | 0.3" |
| Accuracy | +50 PPM (Quartz) |
| Input | |
| Start/Stop and Reset Inputs ... | Dry Contact NPN open collector transistor |
| Min. Closure Time | 40 ms (start/stop), 100 ms (reset) |
| Memory | Yes, 5 year life |
| Connection | Screw terminal |
| Front panel rating | IP64 |
| Operating temperature | +32 to 131°F (0 to 55°C) |
| Storage temperature | -13 to 158°F (-25 to 70°C) |
| Weight | 2.1 oz. (60g) |

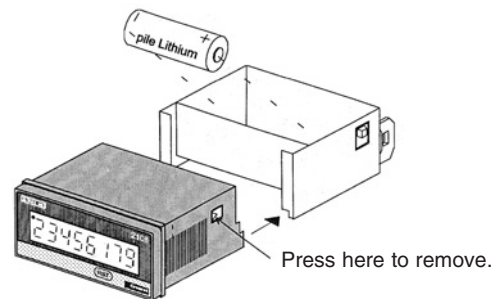


CONFORMITY:

Electromagnetic environment

| | |
|-------------------------|--|
| Radiated field | IEC 1000-4-3, level 3, 10 V/M, 26 MHz to 1 GHz |
| Fast transients | IEC 1000-4-4, level 3, 1 KV |
| Damped oscillatory wave | IEC 255.4, level 3, 1 KV |
| Electrostatic discharge | IEC 1000-4-2, level 3, 8 KV |

DIMENSIONS: (mm)

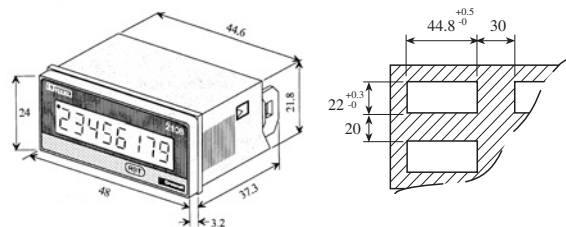

ORDERING INFORMATION:

87 610 440

Products and specifications subject to change without notice.
Consult factory for application assistance.