

# Dialight

## PWAR CIRCULAR LIGHT ENGINE MODULE PWAR/PWARD



### APPLICATION

- ▲ Spot lighting
- ▲ Accent lighting
- ▲ General illumination
- ▲ Interior use only
- ▲ Architectural lighting
- ▲ Machine vision
- ▲ Display cases

All applications require additional heatsink. For factory fitted heatsink see AR111 / AR111-LV datasheet.

### ORDERING INFORMATION

PWARD-C1-AA-BB	
<p>Typical Colour (AA) Temperature</p> <p><b>CW</b> = 5000K – 6350K</p> <p><b>NW</b> = 3800K – 4100K</p> <p><b>WW</b> = 2850K – 3250K</p>	<p>Options</p> <p>Blank = no onboard driver</p> <p>D = with onboard driver</p>
<p>Optic (BB)</p> <p><b>SP</b> = 7 degree spot</p> <p><b>WD</b> = 13 degree wide</p> <p><i>All angles are half divergence</i></p>	


### FEATURES / BENEFITS

- ▲ Utilizes 9 premium flux LUXEON® Rebel™ LEDs, 100+ lumens for cool white, 100+ lumens for neutral white and 50+ lumens for warm white
- ▲ Allows for custom heatsink or fixture design
- ▲ ETL recognized to UL standards (pending)
- ▲ Available in choice of colours & colour temperatures
- ▲ Quick connect terminal blocks for easy installation
- ▲ >70% lumen maintenance @ 50,000 hours at max operating temperature. Better at lower operating temps!

### MATERIALS / FINISH

- ▲ **Casing** - ADC10 Aluminium Alloy
- ▲ **Finish** - Anodised Satin Silver
- ▲ **Connection** - Cage Clamp Connectors
- ▲ **Optics** - Dialight-Lumidrive Optics
- ▲ **Lens Cover** - Polycarbonate 143R
- ▲ **Rear Cover** - Polycarbonate 143R

### MECHANICAL DIMENSIONS

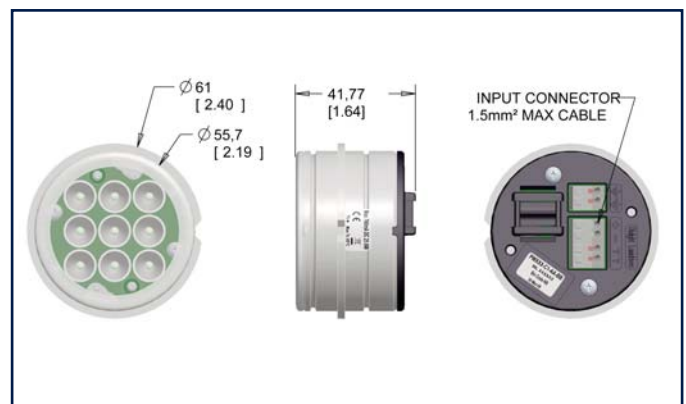

Diameter x H  
61mm x 41.8mm (2.40" x 1.65")  
Maximum Cable Dia - 1.5mm<sup>2</sup> / 16 AWG

#### Dialight Europe Ltd

Exning Road • Newmarket • Suffolk, United Kingdom, CB8 0AX  
Tel :+44 (0)1638 666541 • www.dialight.com

#### Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA  
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com

MDEXLUMPWAR\_A

## OPERATING CHARACTERISTICS

Model / Color	Typical Total Lumen Output		Power Consumption		Drive Current / Operating Current	Input Voltage
	350mA / LV	700mA	350mA / LV	700mA	mA	
PWAR / CW	900	1620	10.8W	21.6W	350 - 700	*30 -36VDC
PWAR / NW	900	1620				
PWAR / WW	450	855				
PWARD / CW	900	-	11.0W	-	**1.0A - 500mA	12-24VDC 11-16VAC
PWARD / NW	900	-				
PWARD / WW	450	-				

Note: Lumen output based on manufacturers data

\*Based on max Vf of 4.0V

\*\*1.2A for initial switch on

## OPERATING CONDITIONS

- ▲ Max case temp = 85°C @ 350mA
- ▲ PWAR requires constant current driver  
PWARD requires constant voltage driver  
(See compatibility list)
- ▲ Max drive current 700mA (constant current version)
- ▲ Modules require additional heatsinking for lumen maintenance figures.
- ▲ IP20 rating

## HEATSINK PERFORMANCE NOTE

Any custom designed heatsink must maintain a maximum case temperature of 85°C or less for the required working ambient temperature.

## COMPATIBLE DRIVERS

Compatible Dialight Lumidrive Constant Current Drivers:-				Compatible Dialight Lumidrive Constant Voltage AC/DC Drivers:-			
Driver	350mA	700mA	NO. OF UNITS	Driver	12V	24V	NO. OF UNITS
MDU 9 (MDU9-35-70)	✓	✗	1	MULTIDRIVER (MLD8-C-35-70)	✓	✗	1
MINIDIM 70 (MND70)	✓	✗	1	MVDU100-12-P	✓	N/A	1— 8
36W 700mA IP65 Driver (MCDU36-700-P)	✗	✓	1	MVDU100-24-P	N/A	✓	1— 5

### Dialight Europe Ltd

Exning Road • Newmarket • Suffolk, United Kingdom, CB8 0AX

Tel : +44 (0)1638 666541 • www.dialight.com



### Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEXLUMPWAR\_A

Datasheet subject to change without notice.

Please visit www.dialight.com for updates.