


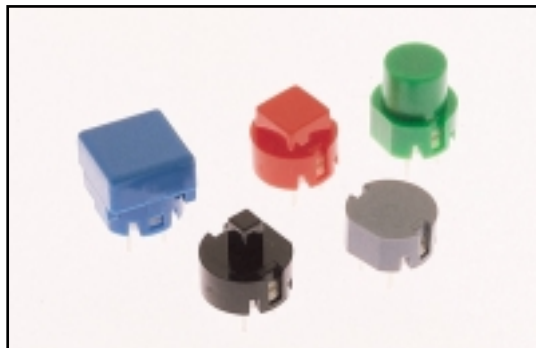

SPECIFICATIONS

Ratings:	10mA @ 35 VDC
Electrical Life:	500,000 cycles typical
Contact Resistance:	10mΩ max., typical @ 2-4 VDC, 100mA
Insulation Resistance:	1,00MΩ min.
Dielectric Strength:	>1,000 V rms at sea level
Operating Force:	130 ± 50 gf

MATERIALS

Housing:	Polycarbonate (PC)
Base:	Valox
Contacts:	Silver-plated copper alloy
Terminals:	Silver-plated copper alloy

HOW TO ORDER

Cap Style	Cap Color	Additional Cap (Fits Over Cap Style 520.04 Only)	Additional Cap Color
520.01 520.02 520.03 520.04 520.05	BLK=Black YEL=Yellow WHT=White BLU=Blue RED=Red GRN=Green DGR=Dark Grey LGR=Light Grey	See Cap Section	
	520.04 & 520.05 available in BLK & LGR only		


EXAMPLE

520.04 → BLK → TAA → RED


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.




520.01

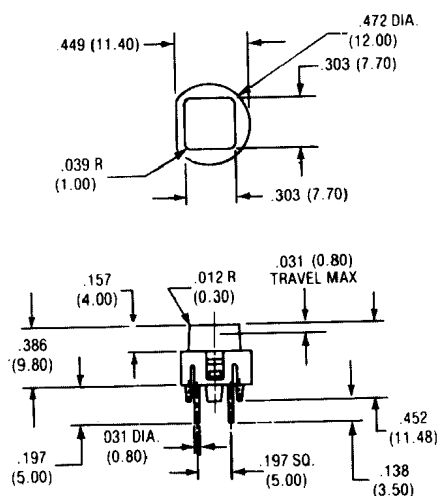



P.C. MOUNTING




Schematic






PUSHBUTTON SWITCHES

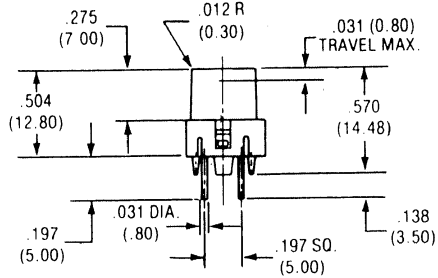


P.C. MOUNTING






Schematic

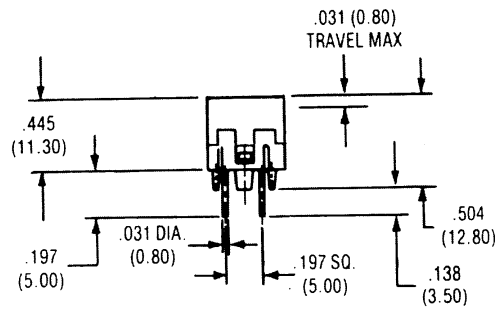


P.C. MOUNTING






Schematic

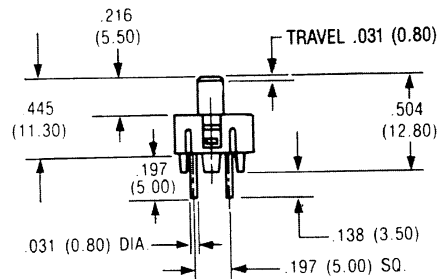


P.C. MOUNTING




Schematic

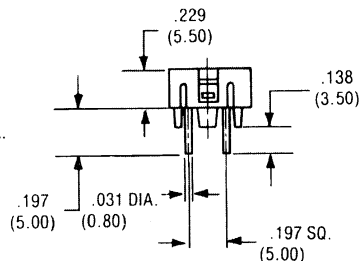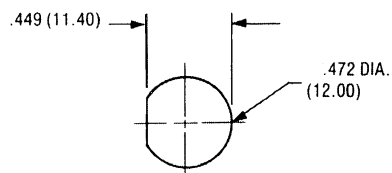

P.C. MOUNTING



Schematic



520.04 and 520.05 are available in black and light grey only.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.