


# SERIES 901 SWITCHES

## TACT SWITCHES SMT



E-SWITCH®

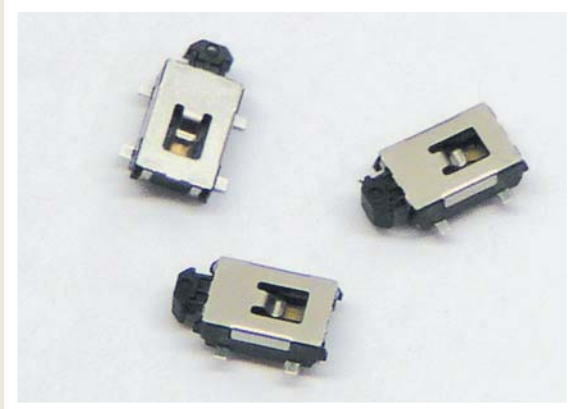

### SPECIFICATIONS

Contact Rating:	12 VDC, 50mA
Life Expectancy:	50,000 cycles
Contact Resistance:	100mΩ max. (initial)
Insulation Resistance:	100MΩ min. @ 100 VDC
Dielectric Strength:	250 VAC
Actuator Force:	180 ± 50 gf min.
Operating Temperature:	-20°C to +70°C
Travel:	0.30 ± 0.1mm


### FEATURES & BENEFITS

- ▶ Right Angle SMT
- ▶ Unique design allows PC board edge mounting
- ▶ Subminiature package size

### APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals

### HOW TO ORDER

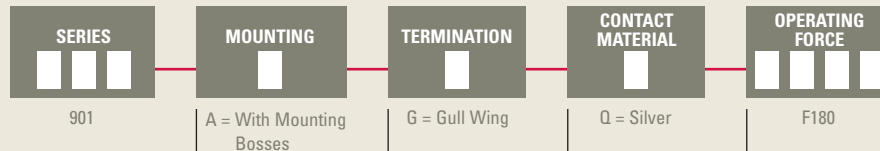

Example Ordering Number  
901-A-G-Q-F180

Specifications subject to change without notice.

901

