
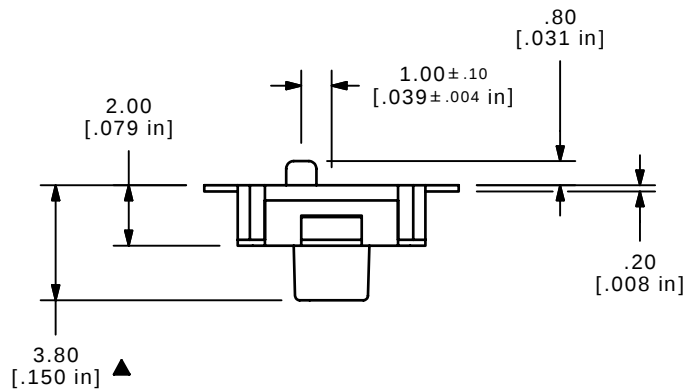
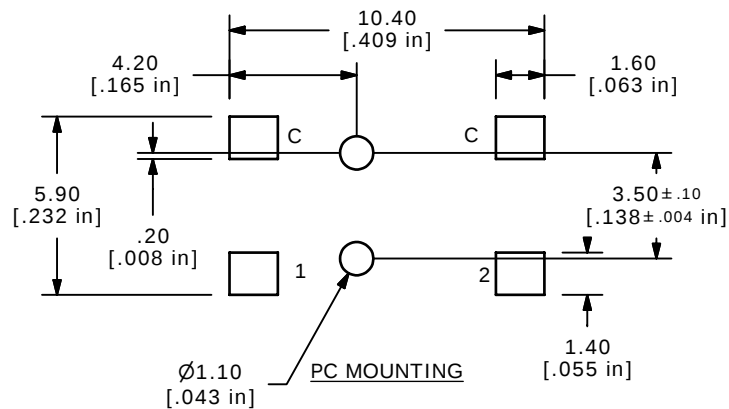
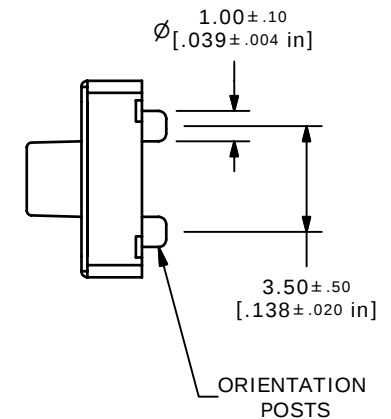
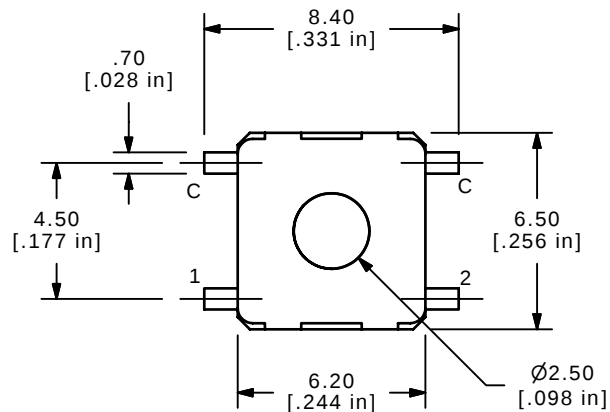


ISOMETRIC

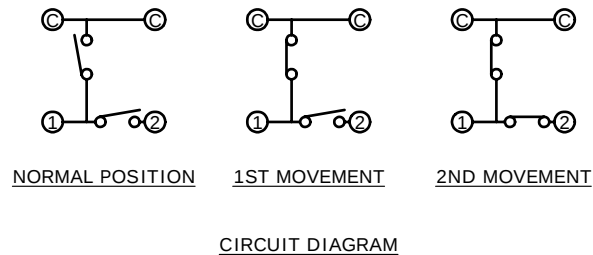

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.3
- CONTACT RESISTANCE: 200mΩ MAX.
- RATING: 30VDC, 20mA
- STROKE: 1ST-0.30± 0.10
2ND-0.55± 0.15
- LIFE CYCLES: 10,000 MIN
- FORCES: 1ST- 100± 40gf
2ND- 250± 80gf
- 2002/95/EC (ROHS) COMPLIANT
- PACKAGING: TAPE AND REEL, 1200 PER REEL
- ▲ DENOTES CRITICAL DIMENSIONS
- CONTACT MATERIAL: SILVER

E-SWITCH®

B	16750	UPDATED NOTES	12/13/06	TN
A	16746	RELEASED FOR PRODUCTION	12/11/06	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL3350BF100Q

SCALE 4:1

DATE 12/13/2006

DR TN

DWG P010684

REV B