


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

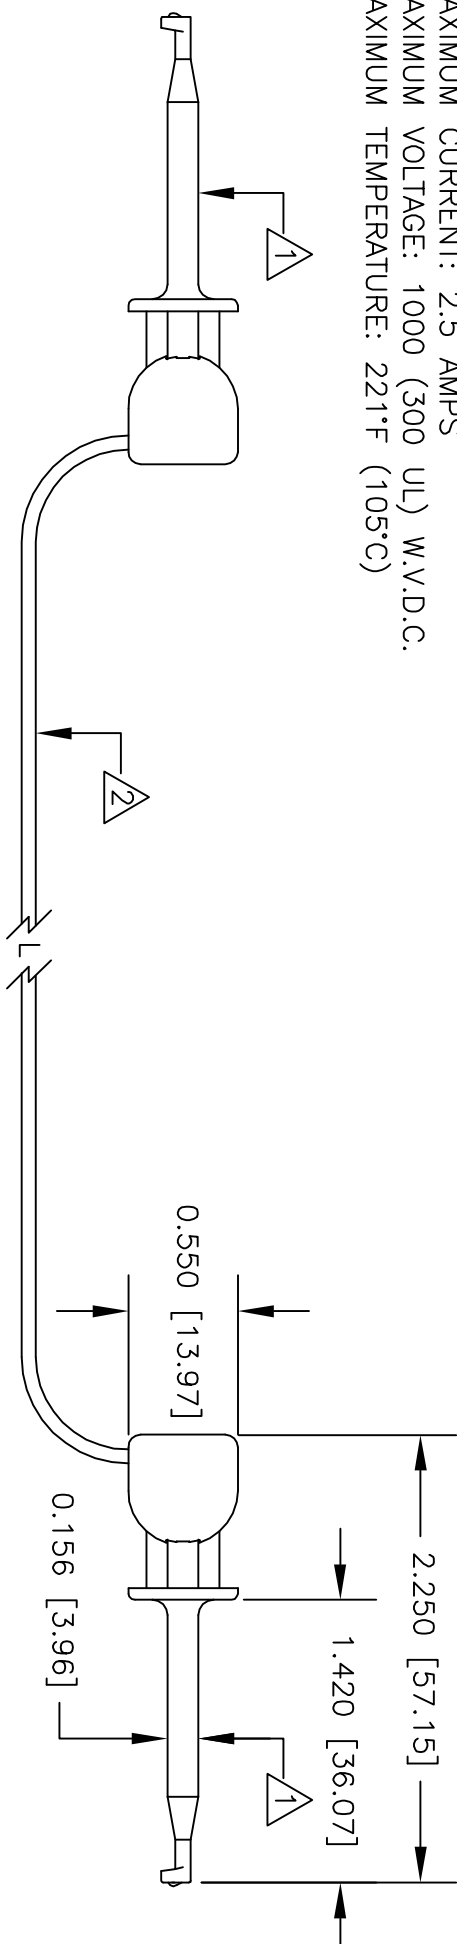

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.		DESCRIPTION	
		±	.XX ±	±	APPROVALS	DATE	EZ-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.
			.XXX ±		DRAWN	R.L. 10/10	
					APPROVED BY		
		MATERIAL SEE NOTE.					MINI-HOOK (X100W) JUMPER
		FINISH SEE NOTE.					
NEXT ASSY	USED ON						SIZE CODE IDENT NO. DRAWING NO. REV.
APPLICATION	DO NOT SCALE DRAWING						A 08505 204W
							SCALE 1:1 SHEET 1 OF 1