


HRCI Industrial Ceramic Body Fuses

Dimensional Data



CIF21
HRCI-CA Bolt-On Mounting
Ampere Ratings: 1-30A
Voltage Rating: 600Vac; 250Vdc
Interrupting Rating: 200,000A RMS
Symmetrical
Agency Information: CSA C22.2
No. 106-M92

- Provides both overload and short-circuit protection to HRCI requirements.
- Offset blades for bolt-on mounting.
- CIF21 fuse fits the Bussmann-Camaster Fuseholder.

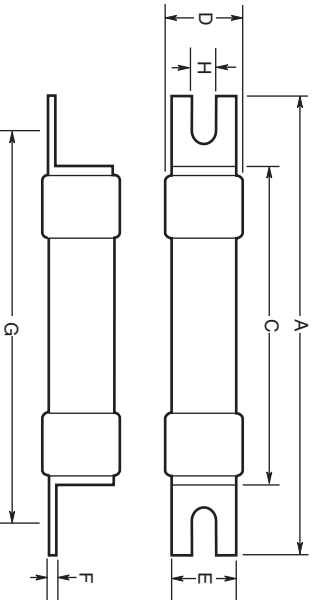


CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Type	Catalog Symbol	Current Ratings	Dimensions in Inches and (mm)					
			Overall		Tags		Mounting	
			A	E	F	G	H	Body
HRCI-CA	(AMP) CIF21	1, 3, 10, 15, 20, 25, 30	2.15 (54.50)	.44 (11.10)	.03 (0.81)	1.75 (44.50)	.19 (4.70)	1.44 (35.50) .54 (13.80)

Data Sheet: 4127



Dimensional Data

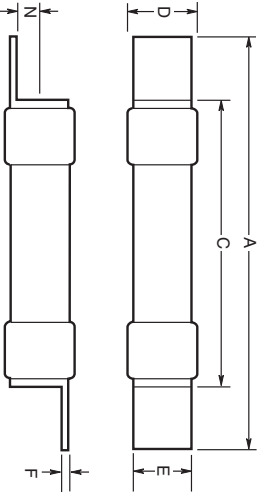

- Industrial miniature fuse with offset blades for clip-in mounting.
- Ground ceramic body with plated endcaps.
- Provides both short-circuit and overload protection.
- CIF06 fits the 30A SafeLOC fuseholder.
- EK fits the 60A SafeLOC fuseholder.

CIF06 & EK
HRCI-CB Clip-In Mounting
Ampere Ratings: CIF06: 1-30A, EK: 35-60A
Voltage Rating: 600Vac; 250Vdc
Interrupting Rating: 200,000A RMS Symmetrical
Agency Information: CSA C22.2 No. 106-M92

CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Type	Catalog Symbol	Current Ratings	Dimensions in Inches and (mm)					
			A	E	F	N	C	D
HRCI-CB	(AMP) CIF06	1, 10, 15, 20, 25, 30	2.38 (60.40)	.50 (12.70)	.03 (0.81)	.14 (3.50)	1.44 (35.50)	.54 (13.80)
	EK (AMP)	30, 35, 40, 50, 60	2.65 (67.30)	.58 (14.80)	.05 (1.22)	.14 (3.50)	1.44 (36.30)	.8 (21.40)

Data Sheet: 4128

