



The engineer's choice

ebmpapst

4184 NXHH

INDEX

| | | |
|----------|---|----------|
| 1 | General | 3 |
| 2 | Mechanics | 3 |
| 2.1 | General..... | 3 |
| 2.2 | Connections..... | 3 |
| 3 | Operating Data | 4 |
| 3.1 | Operating Data - Electrical Interface - Input..... | 4 |
| 3.2 | Electrical Operating Data | 5 |
| 3.3 | Operating Data - Electrical Interface -Output | 5 |
| 3.4 | Electrical Features..... | 6 |
| 3.5 | Aerodynamic..... | 7 |
| 3.6 | Sound Data..... | 8 |
| 4 | Environment | 8 |
| 4.1 | General..... | 8 |
| 4.2 | Climatic requirements*) | 8 |
| 5 | Safety | 9 |
| 5.1 | Electrical Safety..... | 9 |
| 5.2 | Approval Tests | 9 |
| 6 | Reliability | 9 |
| 6.1 | General..... | 9 |

1 General

| | | |
|---------------------------------------|------------------------|--|
| Fan type | Fan | |
| Rotational direction looking at rotor | clockwise | |
| Airflow direction | Air intake over struts | |
| Bearing system | Ball bearing | |
| Mounting position | any | |


2 Mechanics

2.1 General

| | | |
|---|---|--|
| Width | 119,0 mm | |
| Height | 119,0 mm | |
| Depth | 38,0 mm | |
| Weight | 0,380 kg | |
| Housing material | Metal | |
| Impeller material | Plastic | |
| Max. torque when mounted across both mounting flanges | wire outlet corner: 170 Ncm remaining corners: 300 Ncm | |
| Screw size | ISO 4762 - M3 degreased, without an additional brace and without washer | |

2.2 Connections

| | | |
|-----------------------|-------------|--|
| Electrical connection | Plug | |
| Length of lead wire | | |
| Tolerance | | |
| Wire gauge (AWG) | | |
| Insulation diameter | | |
| Contact | see drawing | |



3 Operating Data

3.1 Operating Data - Electrical Interface - Input

| | |
|---------------|------|
| Control input | None |
|---------------|------|

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

| Features | Condition | Symbol | Values | | |
|------------------------------|----------------|--------|-------------|-------------|-------------|
| Voltage range | $\Delta p = 0$ | U | 12,0 V | | 25,0 V |
| Nominal voltage | $\Delta p = 0$ | U_N | | 24,0 V | |
| Power consumption | $\Delta p = 0$ | P | 2,9 W | 13,6 W | 14,8 W |
| Tolerance | 0001 | | +/- 17,5 % | +/- 12,5 % | +/- 15,0 % |
| Current consumption | $\Delta p = 0$ | I | 240 mA | 570 mA | 590 mA |
| Tolerance | 0001 | | +/- 17,5 % | +/- 12,5 % | +/- 15,0 % |
| Speed | $\Delta p = 0$ | n | 2.800 1/min | 4.900 1/min | 5.100 1/min |
| Tolerance | 0001 | | +/- 12,5 % | +/- 7,5 % | +/- 10,0 % |
| Starting current consumption | | | | 2.870 mA | |


3.3 Operating Data - Electrical Interface -Output

| | |
|------------|------|
| Tacho type | None |
|------------|------|

| | |
|------------|------|
| Alarm type | None |
|------------|------|

3.4 Electrical Features

| | | |
|--|------------------------|--|
| Electronic function | None | |
| Reversed polarity protection | Rectifying diode | |
| Max. residual current at U_n | $I_F \leq 20 \mu A$ | |
| Locked rotor protection | Auto restart | |
| Locked rotor current at U_n | approx. 2.870 mA | |
| Clock signal t_3/t_4 at locked rotor | Typical: 0,3 s / 1,6 s | |

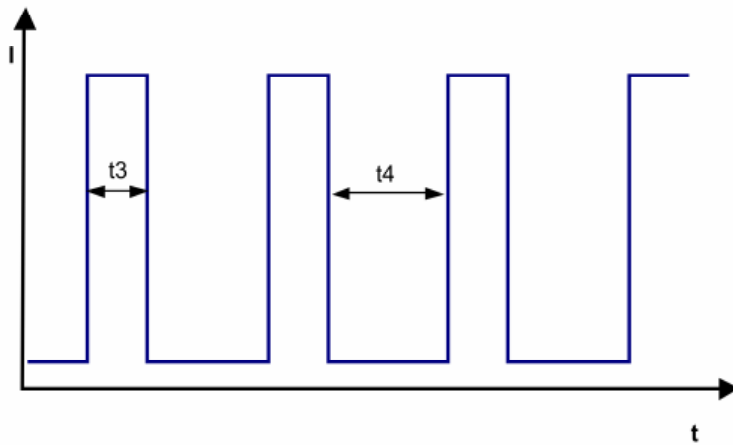


3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
 Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
 In the intake and outlet area should not be any solid obstruction within 0,5 m.
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

4.900 1/min at free air flow

| | | |
|---|-------------------------|--|
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | 260,0 m ³ /h | |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | 204 Pa | |

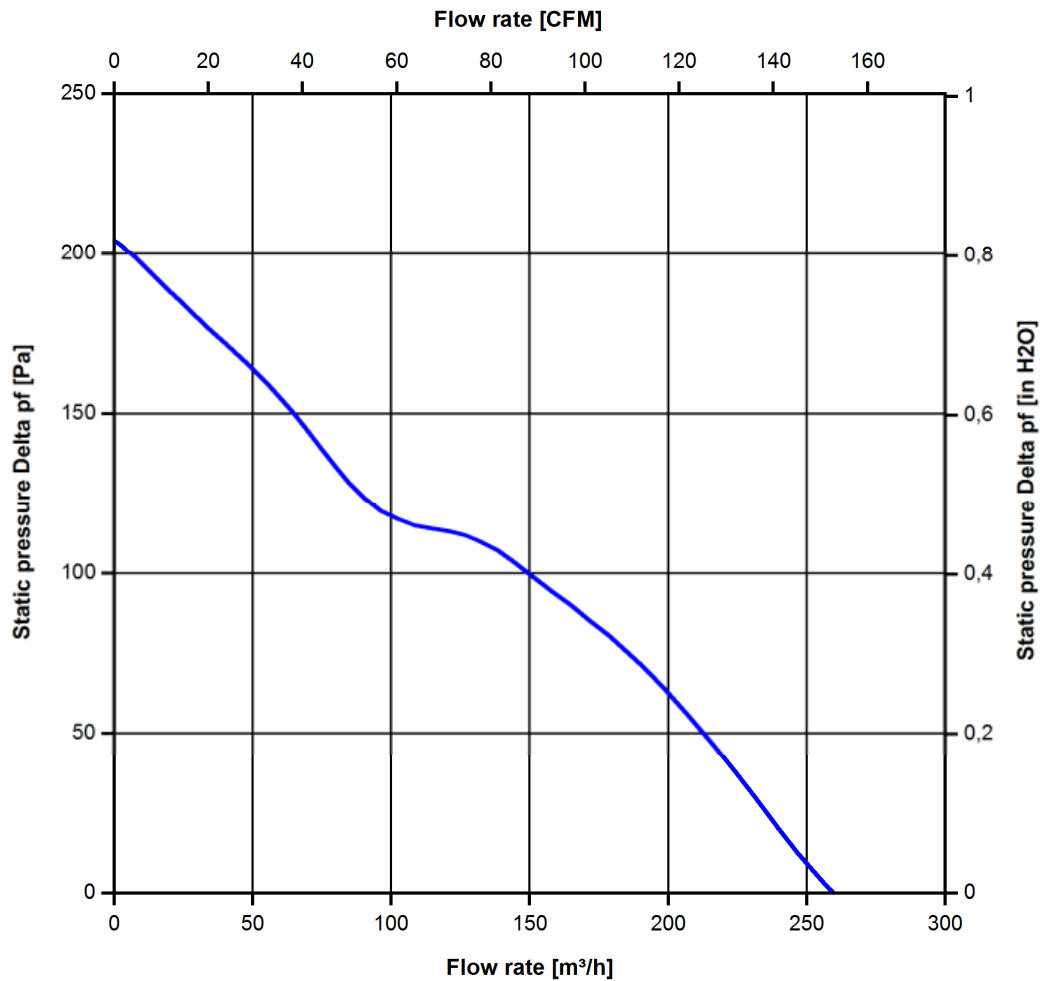

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see section 3.5

a.) Operation condition:

| | | |
|---|----------------------------------|--|
| 4.900 1/min at free air flow | | |
| Optimal operating point | 160,0 m ³ /h @ 100 Pa | |
| Sound power level at the optimal operating point | 6,7 bel(A) | |
| Sound pressure level at free air flow, measured in rubber bands | 60,0 dB(A) | |

4 Environment

4.1 General

| | | |
|--|--------|--|
| Min. permitted ambient temperature TU min. | -30 °C | |
| Max. permitted ambient temperature TU max. | 55 °C | |
| Min. permitted storage temperature TL min. | -40 °C | |
| Max. permitted storage temperature TL max. | 80 °C | |

4.2 Climatic requirements *)

| | | |
|-----------------------|---|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days | |
| Water exposure | None | |
| Dust requirements | None | |
| Salt fog requirements | None | |

*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety

| | | |
|--|------------------|--|
| Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. | 500 VAC / 1 Min. | |
| B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | 500 VAC / 1 Sec. | |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | RI > 10 MOhm | |
| clearance / creepage distance | 1,0 mm / 1,2 mm | |
| Protection class | III | |

5.2 Approval Tests

| | |
|-----|---|
| CE | Yes |
| UL | Yes / UL507, Electric Fans |
| VDE | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Yes / C22.2 No. 113 Fans and Ventilators |
| CCC | No |

The approval tests are observed to:

U approval max.:25,0 V @ TU approval max.: 55,0 °C


6 Reliability

6.1 General

| | | |
|-----------------------------------|----------|--|
| Life expectancy L10 at TU = 40 °C | 70.000 h | |
| Life expectancy L10 at TU max. | 52.500 h | |

Copying of this document and using it is others and the use or dissemination of the contents thereof are prohibited without express and written approval of the copyright holder. Offenders shall be liable for damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzvermerk nach DIN ISO 10181 beachten!
Refer to protection notice DIN ISO 10181

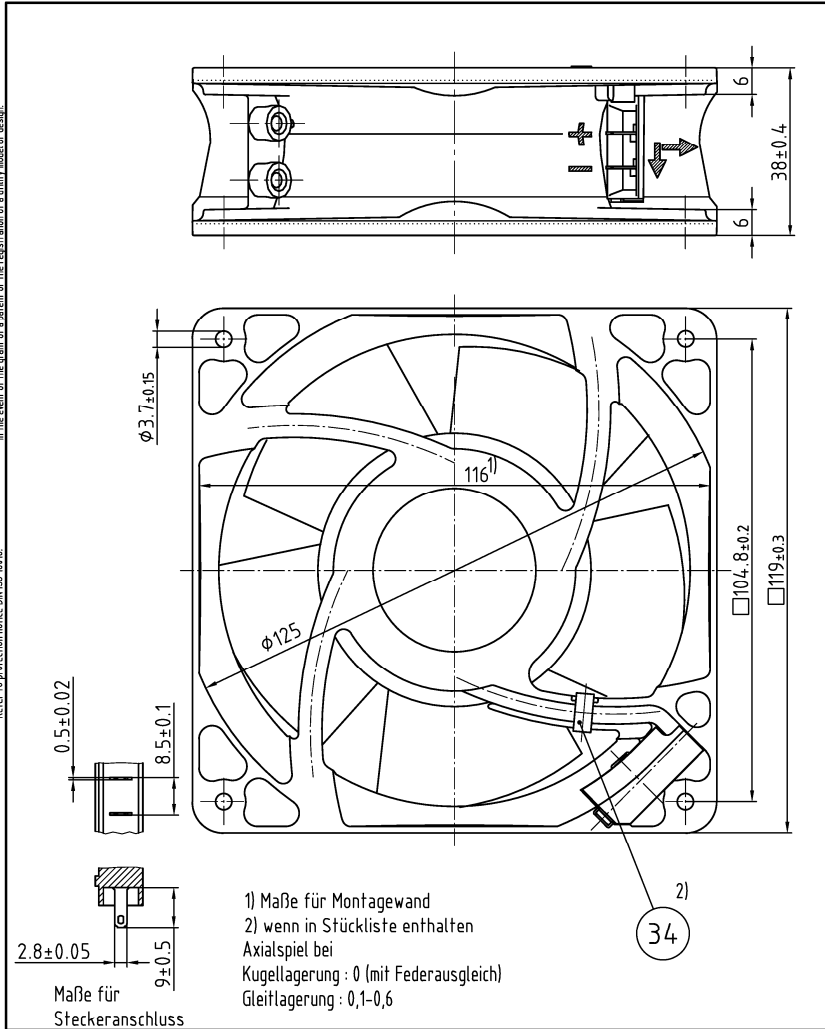

| | | | | |
|--|---------------------|-----------------------------|--|--|
| Tolerierung/Tolerances: DIN 7167 | | Artikel/Title | | Massstab/Scale |
| Allgemeintoleranzen/ Gen. Tolerances: | | Zchg.-Nr./ Dwg.-No.: | | Blatt/Page |
| Datum/Date | Name/Name | | | ebmpapst ebn-papst St. Georgen GmbH & Co. KG |
| Bearb./Drawn | | | | |
| Index/Index | Änd.-Nr./Change-No. | Ers. f. Zchg./ Replaces: | | A4 |
| gepr. u. zur Verwendung freigegeben/Checked for release von by | | | | |