



The engineer's choice

ebmpapst

4658 N

INDEX

1 General 3

2 Mechanics 3

2.1 GENERAL 3

2.2 CONNECTIONS 4

3 Operating Data 5

3.1 ELECTRICAL OPERATING DATA 5

3.2 OPERATING DATA - ELECTRICAL INTERFACE -OUTPUT 5

3.3 ELECTRICAL FEATURES 5

3.4 AERODYNAMIC 6

3.5 SOUND DATA 7

4 Environment 8

4.1 GENERAL 8

4.2 CLIMATIC REQUIREMENTS*) 8

5 Safety 9

5.1 ELECTRICAL SAFETY 9

5.2 APPROVAL TESTS 9

6 Reliability 9

6.1 GENERAL 9

1 General


| | |
|---------------------------------------|------------------------|
| Fan type | Fan |
| Rotational direction looking at rotor | clockwise |
| Airflow direction | Air intake over struts |
| Bearing system | Ball bearing |
| Mounting position | any |
| Balancing grade | 2,5 |

2 Mechanics**2.1 General**

| | | |
|---|---|--|
| Width | 119,0 mm | |
| Height | 119,0 mm | |
| Depth | 38,0 mm | |
| Diameter | 0,0 mm | |
| Weight | 0,550 kg | |
| Housing material | Metal | |
| Impeller material | Metal | |
| Max. torque when mounted across both mounting flanges | wire outlet corner: 190 Ncm remaining corners: 310 Ncm | |
| Screw size | ISO 4762 - M4 degreased, without an additional brace and without washer | |

2.2 Connections

| | | |
|-----------------------|-------------|--|
| Electrical connection | Plug | |
| Length of lead wire | see drawing | |
| Tolerance | | |
| Length of tube | see drawing | |
| Tolerance | | |
| Wire gauge (AWG) | | |
| Insulation diameter | | |
| Plug | see drawing | |
| Contact | see drawing | |



3 Operating Data

3.1 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).
In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.4)

I: corresp. to RMS line current


| Features | Condition | Symbol | Values | |
|-------------------|----------------|--------|------------------|------------------|
| Frequency | $\Delta p = 0$ | f | 50 Hz | 60 Hz |
| Nominal voltage | $\Delta p = 0$ | U_N | 230,0 V | 230,0 V |
| Tolerance | | | + 6,0 % - 10,0 % | + 6,0 % - 10,0 % |
| Power consumption | $\Delta p = 0$ | P | 19,5 W | 18,0 W |
| Tolerance | | | + 5,0 % - 10,0 % | + 5,0 % - 10,0 % |
| Speed | $\Delta p = 0$ | n | 2.600 1/min | 2.950 1/min |
| Tolerance | | | +/- 3,0 % | +/- 3,0 % |

3.2 Operating Data - Electrical Interface -Output

| | |
|------------|------|
| Tacho type | None |
|------------|------|

3.3 Electrical Features

| | |
|-------------------------------|-----------|
| Locked rotor protection | Impedance |
| Locked rotor current at U_N | |

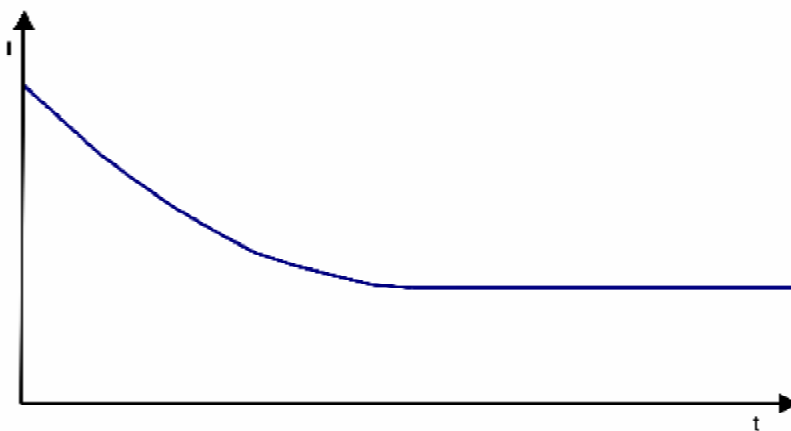

3.4 Aerodynamic


Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
 Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
 In the intake and outlet area should not be any solid obstruction within 0,5 m.
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:
 2.600 1/min at free air flow Frequency: 50 Hz

| | |
|---|-------------------------|
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | 146,0 m ³ /h |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | 78 Pa |

b.) Operation condition:
 2.950 1/min at free air flow Frequency: 60 Hz

| | |
|---|-------------------------|
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | 170,0 m ³ /h |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | 90 Pa |

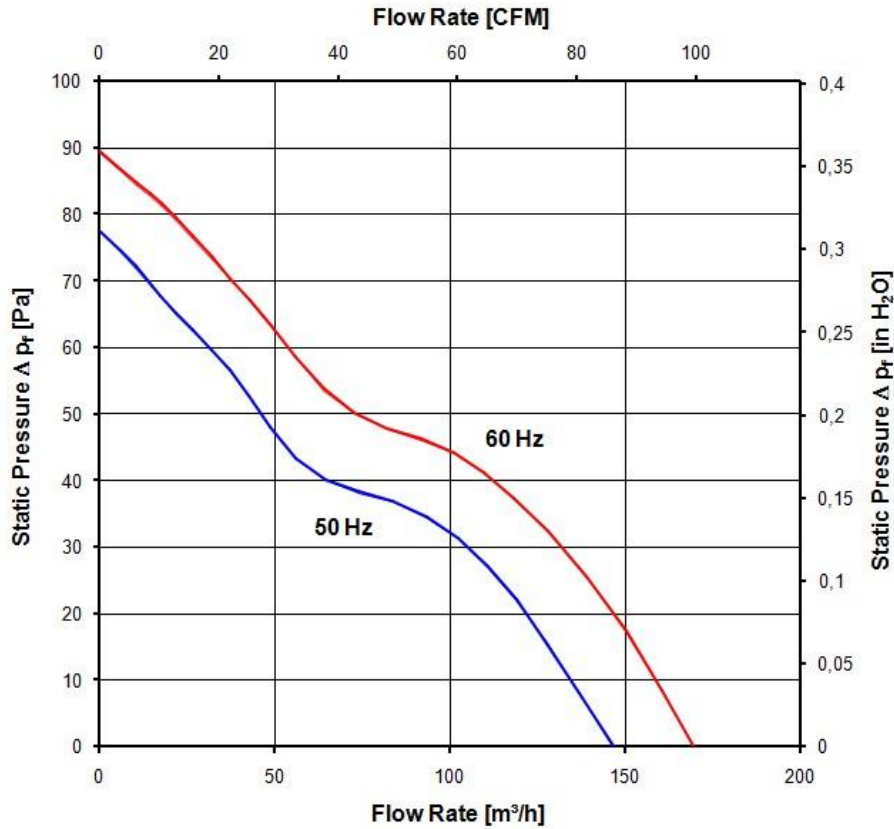

3.5 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB}(A)$
 For further measurement conditions see section 3.4

a.) Operation condition:

2.600 1/min at free air flow

Frequency: 50 Hz

| | | |
|---|---------------------------------|--|
| Optimal operating point | 110,0 m ³ /h @ 25 Pa | |
| Sound power level at the optimal operating point | 5,4 bel(A) | |
| Sound pressure level at free air flow, measured in rubber bands | 44,0 dB(A) | |

b.) Operation condition:

2.950 1/min at free air flow

Frequency: 60 Hz

| | | |
|---|---------------------------------|--|
| Optimal operating point | 120,0 m ³ /h @ 31 Pa | |
| Sound power level at the optimal operating point | 5,7 bel(A) | |
| Sound pressure level at free air flow, measured in rubber bands | 48,0 dB(A) | |

4 Environment

4.1 General

| | | |
|--|----------------------------------|--|
| Min. permitted ambient temperature TU min. | -40 °C / 50 Hz -40 °C / 60 Hz | |
| Max. permitted ambient temperature TU max. | 85 °C / 50 Hz 90 °C / 60 Hz | |
| Min. permitted storage temperature TL min. | -40 °C | |
| Max. permitted storage temperature TL max. | 100 °C | |

4.2 Climatic requirements *)

| | | |
|--------------------------|---|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days | |
| Water exposure | None | |
| Radiation exposure | None | |
| Dust requirements | None | |
| Salt fog requirements | None | |
| Harmful gas requirements | None | |

*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

5 Safety

5.1 Electrical Safety

| | |
|---|--|
| Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | 1500 VAC / 1 Min. 1500 VAC / 1 Sec. |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | RI > 50 MOhm |
| clearance / creepage distance | 2,0 mm / 1,8 mm |
| Protection class | I |

5.2 Approval Tests

| | |
|-----|---|
| CE | Yes |
| UL | Yes / UL507, Electric Fans |
| VDE | Yes |
| CSA | Yes / C22.2 No. 113 Fans and Ventilators |
| CCC | Yes / GB 12350 Safety Requirements for small Power Motors |

The approval tests are observed to:

U approval max.: 230 V / f: 60 Hz @ TU approval max.: 90 °C


6 Reliability

6.1 General

| | | |
|-----------------------------------|--------------------------------------|--|
| Life expectancy L10 at TU = 40 °C | 37.500 h / 50 Hz 40.000 h / 60 Hz | |
| Life expectancy L10 at TU max. | 15.000 h / 50 Hz 15.000 h / 60 Hz | |

Copying of this document and giving it to others and the use or communication of its contents, however, are prohibited. This document is the property of ebm-papst and shall be returned to ebm-papst at the end of the project or at the end of the year of its validity. If it is not returned, it shall be destroyed.

Speichermaß nach DIN ISO 1800 beachten!
Refer to protection within the ISO 1800!

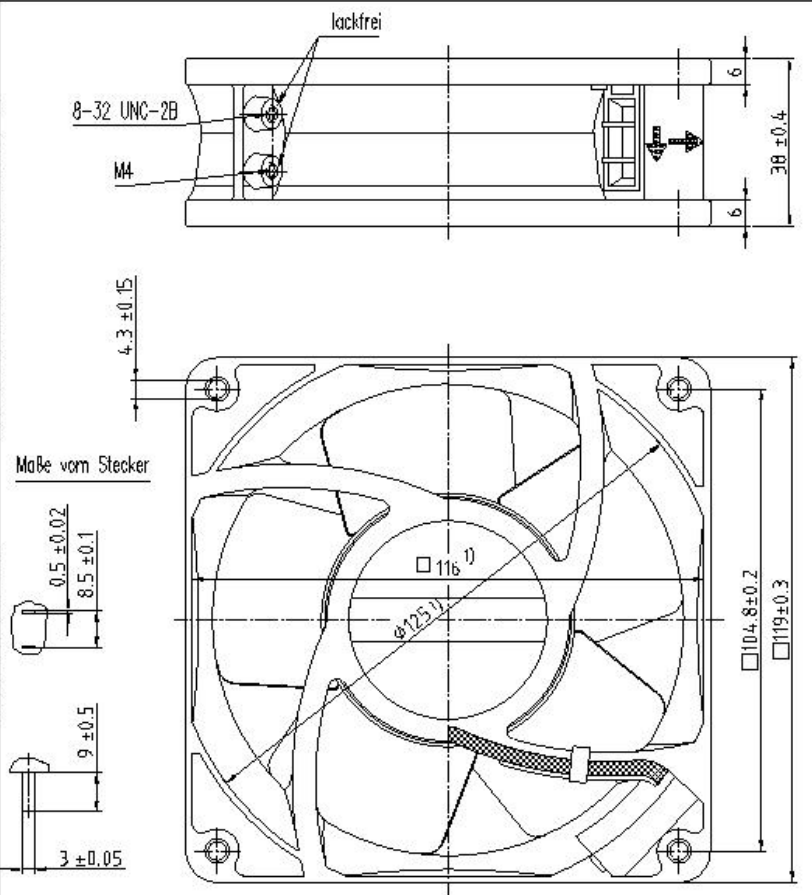

1) Maße für Montagewand

Axialspiel : mit Feder spielfrei verspannt

Ⓢ

Tolerierung/Tolerances: DIN 7167
Allgemeintoleranzen/
Gen. tolerances: DIN ISO 2768-1u.2-mK

| | | | | | | |
|---|--|-------------------------------------|--|--|--------------------------|---------------|
| Datum/Date | | Name/Name | | | Artikel/Title | Maßstab/Scale |
| Bearb./Drawn: | | | | | | |
| Index/Index | | Änd.-Nr./Change-No. | | | Zchg.-Nr./ Dwg.-No.: | Blatt/Page |
| für die Verwendung freigegeben/Checked for release von by | | ebm-papst St. Georgen GmbH & Co. KG | | | Ers./Zchg./ Replaces: | |