



## W2G115 Series



Tubeaxial

127x127x38mm

- DC fans with electronically commutated external rotor motor. Fully integrated commutation electronics.
- With electronic protection against reverse polarity and locked-rotor.
- Mounting from either face using four 4.7 mm holes.

- Die-cast aluminum housing. Impeller of sheet-steel, directly welded onto rotor and stove-enameled.
- Air exhaust over struts. Rotational direction CCW looking at rotor.
- Electrical connection via 2 flat pins 2.8 x 0.8 mm.
- UL, CSA, VDE approvals on some models, please contact application engineering.

| Part Number    | Curve | CFM @ 0 | VDC | Volt. Range | Power (W) | dBA | Max Amb. Temp C | Bearing Type | Features  | Wgt. (lbs) |
|----------------|-------|---------|-----|-------------|-----------|-----|-----------------|--------------|-----------|------------|
| W2G115-AD15-01 | 1     | 118     | 12  | 8 to 16     | 4.5       | 44  | 72              | Ball         | Leads     | 1.31       |
| W2G115-AD15-13 | 1     | 118     | 12  | 8 to 16     | 4.5       | 44  | 72              | Ball         | Terminals | 1.31       |
| W2G115-AE53-01 | 2     | 130     | 12  | 8 to 16     | 5.9       | 48  | 72              | Ball         | Leads     | 1.56       |
| W2G115-AE53-13 | 2     | 130     | 12  | 8 to 16     | 5.9       | 48  | 72              | Ball         | Terminals | 1.56       |
| W2G115-AD17-01 | 1     | 118     | 24  | 18 to 30    | 4.7       | 44  | 72              | Ball         | Leads     | 1.31       |
| W2G115-AD17-13 | 1     | 118     | 24  | 18 to 30    | 4.7       | 44  | 72              | Ball         | Leads     | 1.31       |
| W2G115-AE31-01 | 2     | 130     | 24  | 18 to 30    | 5.7       | 48  | 72              | Ball         | Leads     | 1.56       |
| W2G115-AE31-13 | 2     | 130     | 24  | 18 to 30    | 5.7       | 48  | 72              | Ball         | Terminals | 1.56       |
| W2G115-AG71-01 | 3     | 160     | 24  | 16 to 28    | 12.0      | 52  | 72              | Ball         | Leads     | 1.56       |
| W2G115-AG71-09 | 3     | 160     | 24  | 16 to 28    | 12.0      | 52  | 72              | Ball         | Terminals | 1.56       |
| W2G115-AG71-12 | 3     | 160     | 24  | 16 to 28    | 12.0      | 52  | 72              | Ball         | Terminals | 1.56       |
| W2G115-AD19-01 | 1     | 118     | 48  | 36 to 56    | 4.6       | 44  | 72              | Ball         | Leads     | 1.31       |

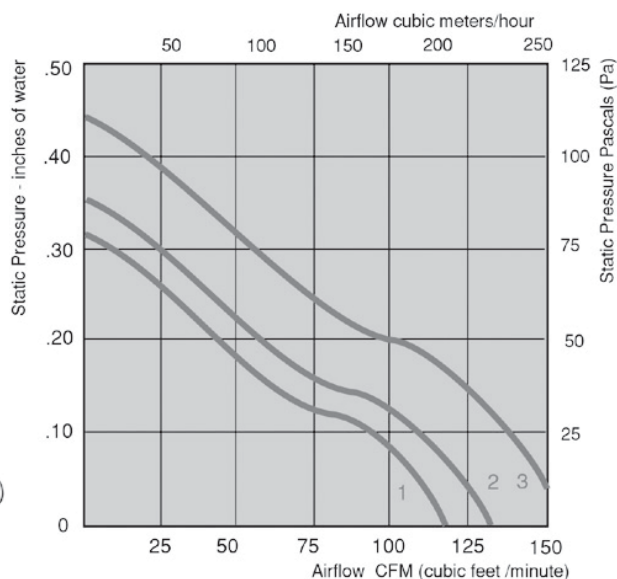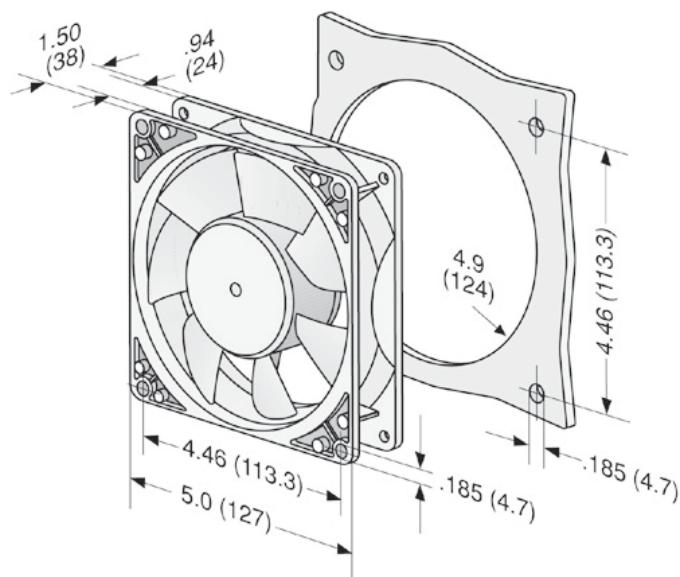

**ebm**papst

e-mail: [sales@us.ebmpapst.com](mailto:sales@us.ebmpapst.com) • TEL: 860-674-1515 • FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice