


NOTES

MATERIAL AND FINISH:


BODY: GLASS FILLED POLYESTER,
UL94V-0 RATED
CONTACTS: PHOSPHOR BRONZE(0.45mm DIA.)
SELECTIVE GOLD ON CONTACTS AS PER PART NO. TABLE, TIN
ON TERMINATION, ALL OVERNICKEL UNDERPLATE.
SHIELD: 0.25mm THICK COPPER ALLOY
PLATED WITH NICKEL

ELECTRICAL CHARACTERISTICS:

- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE 500 MEGOHMS MIN.
- WITHSTANDING VOLTAGE : 500 VAC 1 MINUTE
- CURRENT RATING: 1.5 AMP



A00-432-262-450 GOLD FLASH
A00-432-362-450 15 MICROINCHES OF GOLD
A00-432-662-450 30 MICROINCHES OF GOLD
A00-432-962-450 50 MICROINCHES OF GOLD

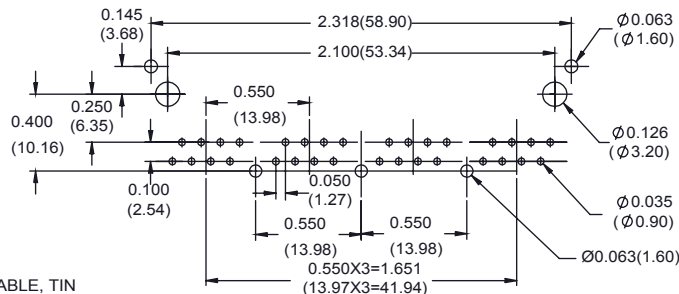

PC BOARD LAYOUT COMPONENT SIDE SHOWN



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.

4 PORTS, 8 POSITIONS SHIELDED PCB JACK (GROUND AT FRONT)



EDAC INC.
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

TOLERANCE UNLESS NOTED:
.00 ± .01
.000 ± .006
.0000 ± .003

ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

ACAD REF. DWG.: A00-432-262-450

DRAWN: F. BRIONES

DATE: SEPT. 16/02

CHECKED:

DATE:

SCALE: N.T.S

SHEET 1 OF 1

DRAWING NUMBER

A00-432-262-450

ISSUE

2