



[About Us](#)

[Products](#)

[Services](#)

[Support](#)


[Projects](#)

[Web Shop](#)

Products

- > [Board Comparison Chart](#)
- >> [Developer's Kits](#)
- >> [OEM Boards](#)
- ↓ [QuickStart Boards](#)
 - > [LPC1343](#)
 - > [LPC2106 RS232](#)
 - > [LPC2129 CAN](#)
 - > [LPC2148 USB](#)
 - > [Prototype board](#)
 - > [Christmas Tree](#)
 - > [Color LCD Bluetooth Game](#)
- >> [Education Boards](#)
- >> [LPCXpresso & mbed](#)
- >> [Displays](#)
- >> [Tools](#)
- >> [Accessories](#)

LPC2148 USB QuickStart Board

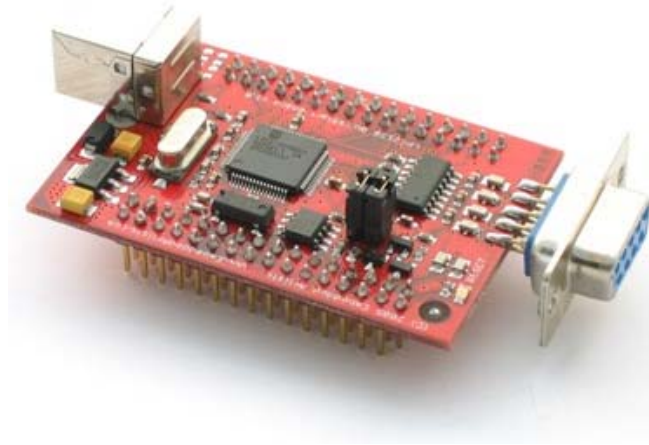

Price Information

EUR

Art.no: [EA-QSB-010](#) [Buy](#)

Currently out-of-stock

Expected delivery date:
2011-08-15

Price Information

EUR

With a prototype board

Art.no: [EA-QSB-110](#) [Buy](#)

Currently out-of-stock

Expected delivery date:
2011-08-15

- [Overview](#)
- [Specification](#)
- [MCU](#)
- [Related Products](#)
- [Resources](#)
- [FAQ](#)

LPC2148 USB QuickStart Board

<i>Processor</i>	NXP's ARM7TDMI LPC2148 with integrated USB 2.0 device.
<i>Program Flash</i>	512 KB
<i>Data Memory</i>	32+8 KB
<i>Clock Crystals</i>	<ul style="list-style-type: none"> • 12.0000 MHz crystal for maximum execution speed (5x PLL = 60 Mhz CPU clock) • 32.768kHz RTC crystal
<i>Dimensions</i>	59 x 39.5 mm
<i>Power</i>	On-board low-dropout voltage and reset generation <ul style="list-style-type: none"> • Generates +3.3V from a +5V supply • +3.3V available for external circuits, up to 300 mA • Power supply: 5 VDC • or via USB connector (very practical since no external power supply is needed)
<i>Connectors</i>	<ul style="list-style-type: none"> • Dual 2x16 pins I/O connectors • Signals available on expansion connector • RS232, DSUB-9 (ESD/EMI protected) • USB connector (USB 2.0 Device)
<i>Other</i>	<ul style="list-style-type: none"> • 2 Kbit I2C E2PROM for storing non-volatile parameters • Simple and automatic program download (ISP) via serial channel. Circuit that automatically controls the bootloader from RS232 channel • Four layer PCB (FR-4 material) for best noise immunity • Both UART #0 and #1 connected