


DC spark-over voltage <sup>1) 2) 3)</sup>	1200 ... 1600	V
Impulse spark-over voltage at 100 V/ $\mu$ s - for 99 % of measured values - typical values of distribution	< 2500 < 2400	V V
Single impulse discharge current (wave 8/20 $\mu$ s)	2.5	kA
Insulation resistance at 100 V <sub>dc</sub>	> 10	G $\Omega$
Capacitance at 1 MHz	< 1	pF
Weight	~ 1	g
Operation and storage temperature	-40 ... +90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, blue	<b>EPCOS 1400 YY O</b> 1400 - Nominal voltage YY - Year of production O - Non radioactive	

<sup>1)</sup> At delivery AQL 0.65 level II, DIN ISO 2859

<sup>2)</sup> In ionized mode

<sup>3)</sup> The first DC spark-over value immediately after changing polarity shall not be considered.

Terms in accordance with ITU-T Rec. K.12 and DIN 57845/VDE0845

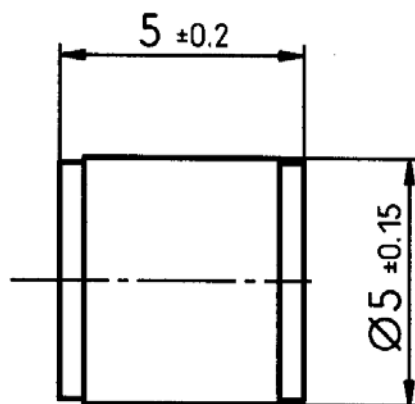

*Not to scale*

*Dimensions in mm*

*Non controlled document*

tin-plated

SMD-Gurtverpackung nach IEC 60286-3 /

*Tape and reel packing comply with the specification of IEC 60286-3*

© EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.