


# 8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR PHOTOCOUPLER

6N135 6N136  
EL4502

## Features

- High speed 1Mbit/s
- High isolation voltage between input and output (Viso=5000 Vrms )
- Guaranteed performance from 0°C to 70°C
- Wide operating temperature range of -55°C to 100°C
- Pb free and RoHS compliant
- UL approved (No. 214129)
- VDE approved (No. 132249)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CSA approved (No. 2037145)

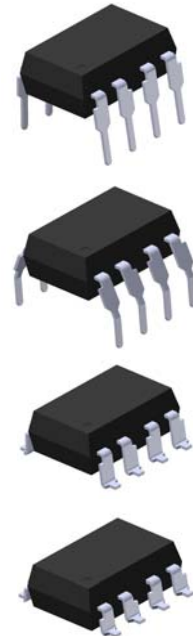

## Description


The 6N135, 6N136 and EL4502 devices each consist of an infrared emitting diode, optically coupled to a high speed photo detector transistor. A separate connection for the photodiode bias and output-transistor collector increase the speed by several orders of magnitude over conventional phototransistor couplers by reducing the base-collector capacitance of the input transistor.

The devices are packaged in an 8-pin DIP package and available in wide-lead spacing and SMD option.

## Applications

- Line receivers
- Telecommunication equipments
- Power transistor isolation in motor drives
- Replacement for low speed phototransistor photo couplers
- Feedback loop in switch-mode power supplies
- Home appliances
- High speed logic ground isolation

### Schematic

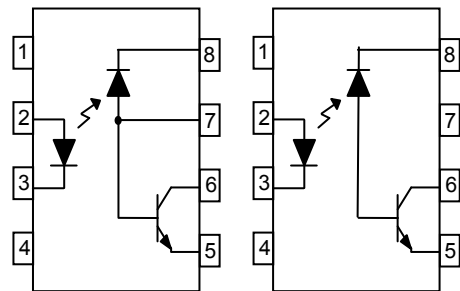

6N135 / 6N136

EL4502

#### Pin Configuration

- 1. No Connection
- 2. Anode
- 3. Cathode
- 4. No Connection
- 5. Gnd
- 6. Vout
- 7.  $V_B$
- 8.  $V_{CC}$

#### Pin Configuration

- 1. No Connection
- 2. Anode
- 3. Cathode
- 4. No Connection
- 5. Gnd
- 6. Vout
- 7. No Connection
- 8.  $V_{CC}$



LIGHTING FOREVER

# 8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR PHOTOCOUPLER

**6N135 6N136  
EL4502**

## Absolute Maximum Ratings (T<sub>a</sub>=25°C)

| Parameter                |   | Symbol                             | Rating     | Unit  |
|--------------------------|---|------------------------------------|------------|-------|
| Input                    | Forward current                             | I <sub>F</sub>                     | 25         | mA    |
|                          | Peak forward current<br>(50% duty, 1ms P.W) | I <sub>FP</sub>                    | 50         | mA    |
|                          | Peak transient current<br>(≤1μs P.W,300pps) | I <sub>Ftrans</sub>                | 1          | A     |
|                          | Reverse voltage                             | V <sub>R</sub>                     | 5          | V     |
|                          | Power dissipation                           | P <sub>IN</sub>                    | 45         | mW    |
| Output                   | Power dissipation                           | P <sub>O</sub>                     | 100        | mW    |
|                          | Emitter-Base reverse voltage                | 6N135<br>6N136<br>V <sub>EBR</sub> | 5          | V     |
|                          | Base current                                | 6N135<br>6N136<br>I <sub>B</sub>   | 5          | mA    |
|                          | Average Output current                      | I <sub>O(AVG)</sub>                | 8          | mA    |
|                          | Peak Output current                         | I <sub>O(PK)</sub>                 | 16         | mA    |
|                          | Output voltage                              | V <sub>O</sub>                     | -0.5 to 20 | V     |
|                          | Supply voltage                              | V <sub>CC</sub>                    | -0.5 to 30 | V     |
| Isolation voltage *1     |   | V <sub>ISO</sub>                   | 5000       | V rms |
| Operating temperature    |   | T <sub>OPR</sub>                   | -55 ~ +100 | °C    |
| Storage temperature      |   | T <sub>STG</sub>                   | -55 ~ +125 | °C    |
| Soldering temperature *2 |   | T <sub>SOL</sub>                   | 260        | °C    |

### Notes

\*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2, 3, 4 are shorted together, and pins 5, 6, 7, 8 are shorted together.

\*2 For 10 seconds.



LIGHTING FOREVER

**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR  
PHOTOCOUPLER****6N135 6N136  
EL4502****Electrical Characteristics ( $T_A=0$  to  $70^\circ\text{C}$  unless specified otherwise)****Input**

| Parameter                                  | Symbol                  | Min. | Typ.* | Max. | Unit                 | Conditions            |
|--|-------------------------|------|-------|------|----------------------|-----------------------|
| Forward voltage                            | $V_F$                   | -    | 1.45  | 1.8  | V                    | $I_F = 16\text{mA}$   |
| Reverse Voltage                            | $V_R$                   | 5.0  | -     | -    | V                    | $I_R = 10\mu\text{A}$ |
| Temperature coefficient of forward voltage | $\Delta V_F/\Delta T_A$ | -    | -1.9  | -    | mV/ $^\circ\text{C}$ | $I_F = 16\text{mA}$   |

**Output**

| Parameter                 | Symbol    | Min. | Typ.* | Max. | Unit          | Conditions   |
|---------------------------|-----------|------|-------|------|---------------|--|
| Logic High Output Current | $I_{OH}$  | -    | 0.001 | 0.5  | $\mu\text{A}$ | $I_F=0\text{mA}, V_O=V_{CC}=5.5\text{V}, T_A=25^\circ\text{C}$             |
|                           |           | -    | 0.01  | 1    |               | $I_F=0\text{mA}, V_O=V_{CC}=15\text{V}, T_A=25^\circ\text{C}$              |
|                           |           | -    | -     | 50   |               | $I_F=0\text{mA}, V_O=V_{CC}=15\text{V}$                                    |
| Logic Low Supply Current  | $I_{CCL}$ | -    | 140   | 200  | $\mu\text{A}$ | $I_F=16\text{mA}, V_O=\text{Open}, V_{CC}=15\text{V}$                      |
| Logic High Supply Current | $I_{CCH}$ | -    | 0.01  | 1    | $\mu\text{A}$ | $I_F=0\text{mA}, V_O=\text{Open}, V_{CC}=15\text{V}, T_A=25^\circ\text{C}$ |
|                           |           | -    | -     | 2    |               | $I_F=0\text{mA}, V_O=\text{Open}, V_{CC}=15\text{V}$                       |

\* Typical values at  $T_A = 25^\circ\text{C}$



LIGHTING FOREVER

# 8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR PHOTOCOUPLER

**6N135 6N136  
EL4502**

## Transfer Characteristics (T<sub>A</sub>=0 to 70°C unless specified otherwise)

| Parameter                |              | Symbol          | Min. | Typ.* | Max. | Unit | Conditions   |
|--------------------------|--------------|-----------------|------|-------|------|------|--|
| Current Transfer Ratio   | 6N135        | CTR             | 7    | -     | 50   | %    | I <sub>F</sub> = 16mA, V <sub>O</sub> = 0.4V, V <sub>CC</sub> =4.5V, T <sub>A</sub> =25°C  |
|                          | 6N136 EL4502 |                 | 19   | -     | 50   |      |  |
|                          | 6N135        |                 | 5    | -     | -    |      |  |
|                          | 6N136 EL4502 |                 | 15   | -     | -    |      |  |
| Logic Low Output Voltage | 6N135        | V <sub>OL</sub> | -    | 0.18  | 0.4  | V    | I <sub>F</sub> = 16mA, I <sub>O</sub> = 1.1mA, V <sub>CC</sub> =4.5V, T <sub>A</sub> =25°C |
|                          | 6N136 EL4502 |                 | -    | 0.18  | 0.4  |      |  |
|                          | 6N135        |                 | -    | -     | 0.5  |      |  |
|                          | 6N136 EL4502 |                 | -    | -     | 0.5  |      |  |

## Switching Characteristics (T<sub>A</sub>=0 to 70°C unless specified otherwise, I<sub>F</sub>=16mA, V<sub>CC</sub>=5V)

| Parameter  |              | Symbol          | Min.  | Typ.* | Max. | Unit | Conditions  |
|--|--------------|-----------------|-------|-------|------|------|---|
| Propagation Delay Time to Logic Low (Fig.8)                        | 6N135        | TPHL            | -     | 0.35  | 1.5  | μs   | R <sub>L</sub> =4.1KΩ, T <sub>A</sub> =25°C   |
|  |              |                 | -     | -     | 2.0  |      | R <sub>L</sub> =4.1KΩ   |
|  | 6N136 EL4502 |                 | -     | 0.35  | 0.8  |      | R <sub>L</sub> =1.9KΩ, T <sub>A</sub> =25°C   |
|  |              |                 | -     | -     | 1.0  |      | R <sub>L</sub> =1.9KΩ   |
| Propagation Delay Time to Logic High (Fig.8)                       | 6N135        | TPLH            | -     | 0.5   | 1.5  | μs   | R <sub>L</sub> =4.1KΩ, T <sub>A</sub> =25°C   |
|  |              |                 | -     | -     | 2.0  |      | R <sub>L</sub> =4.1KΩ   |
|  | 6N136 EL4502 |                 | -     | 0.3   | 0.8  |      | R <sub>L</sub> =1.9KΩ, T <sub>A</sub> =25°C   |
|  |              |                 | -     | -     | 1.0  |      | R <sub>L</sub> =1.9KΩ   |
| Common Mode Transient Immunity at Logic High (Fig.9) <sup>*3</sup> | 6N135        | CM <sub>H</sub> | 1,000 | -     | -    | V/μs | I <sub>F</sub> = 0mA, V <sub>CM</sub> =10Vp-p, R <sub>L</sub> =4.1KΩ, T <sub>A</sub> =25°C  |
|  | 6N136 EL4502 |                 | 1,000 | -     | -    |      | I <sub>F</sub> = 0mA, V <sub>CM</sub> =10Vp-p, R <sub>L</sub> =1.9KΩ, T <sub>A</sub> =25°C  |
| Common Mode Transient Immunity at Logic Low (Fig.9) <sup>*3</sup>  | 6N135        | CM <sub>L</sub> | 1,000 | -     | -    | V/μs | I <sub>F</sub> = 16mA, V <sub>CM</sub> =10Vp-p, R <sub>L</sub> =4.1KΩ, T <sub>A</sub> =25°C |
|  | 6N136 EL4502 |                 | 1,000 | -     | -    |      | I <sub>F</sub> = 16mA, V <sub>CM</sub> =10Vp-p, R <sub>L</sub> =1.9KΩ, T <sub>A</sub> =25°C |

\* Typical values at T<sub>A</sub> = 25°C

**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR  
PHOTOCOUPLER**

**6N135 6N136  
EL4502**

**Typical Performance Curves**

Fig.1 Forward Current vs. Forward Voltage

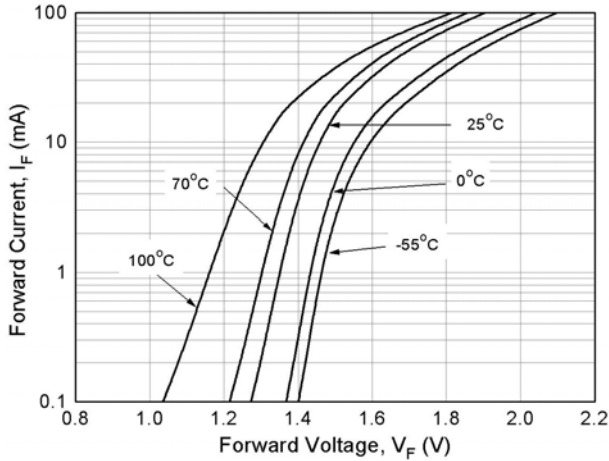


Fig.2 Normalized Current Transfer Ratio vs. Forward Current

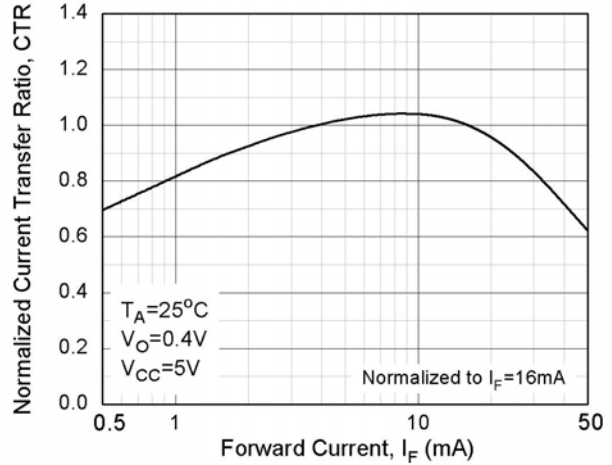


Fig.3 Normalized Current Transfer Ratio vs. Ambient Temperature

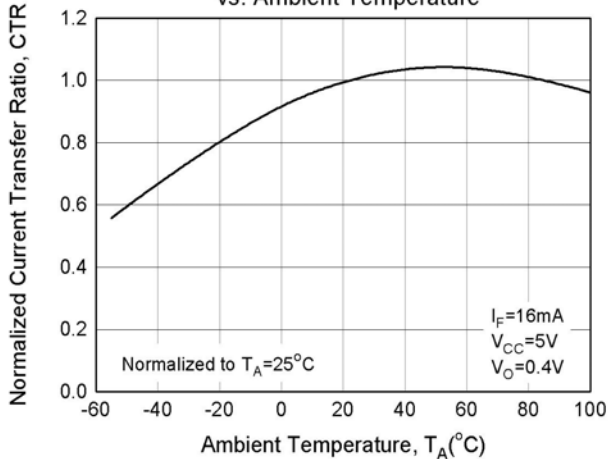


Fig.4 Output Current vs. Output Voltage

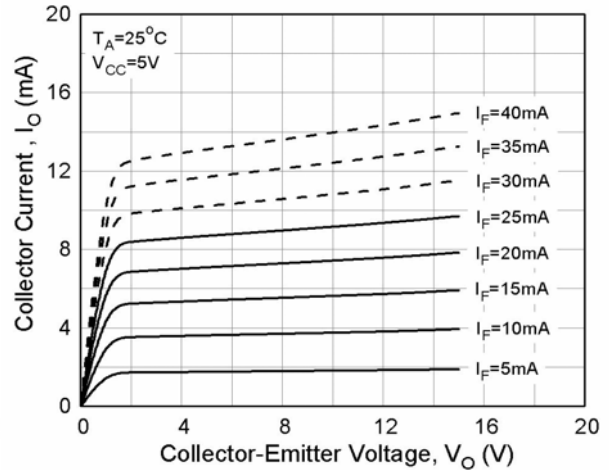


Fig.5 Logic High Output Current vs. Temperature


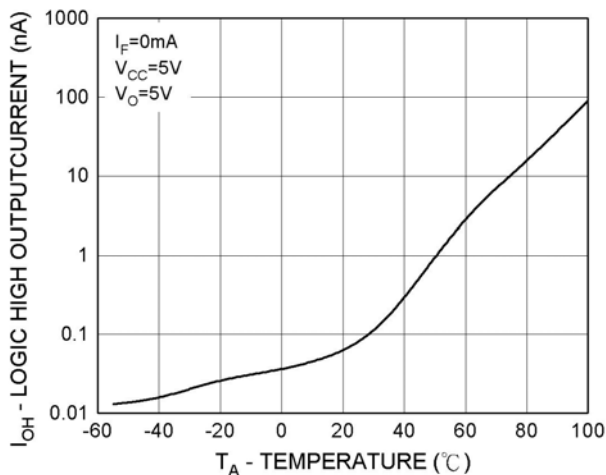


Fig.6 Propagation Delay vs. Load Resistance

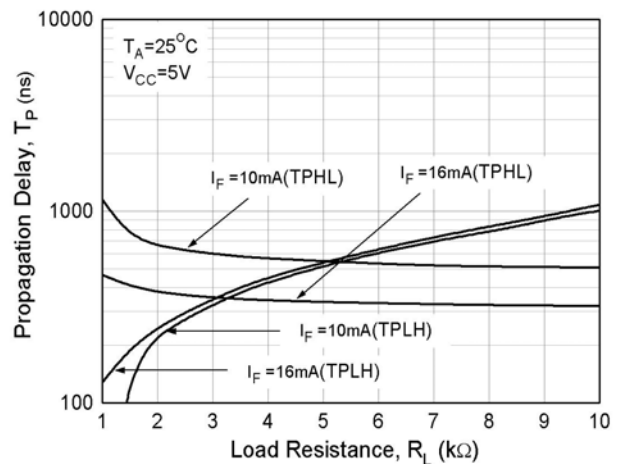

**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR PHOTOCOUPLER**

**6N135 6N136  
EL4502**

Fig.7 Propagation Delay vs. Temperature

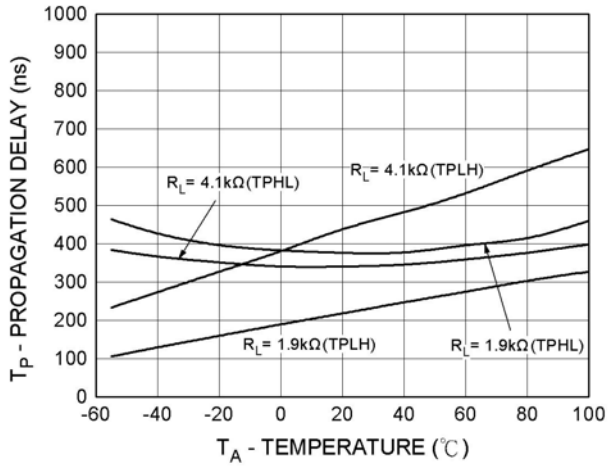


Figure 8 Switching Time Test Circuit & Waveform




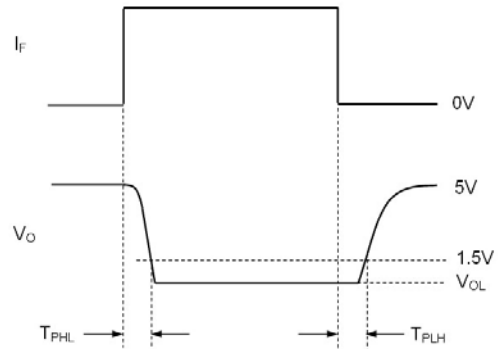


Figure 9 Transient Immunity Test Circuit &

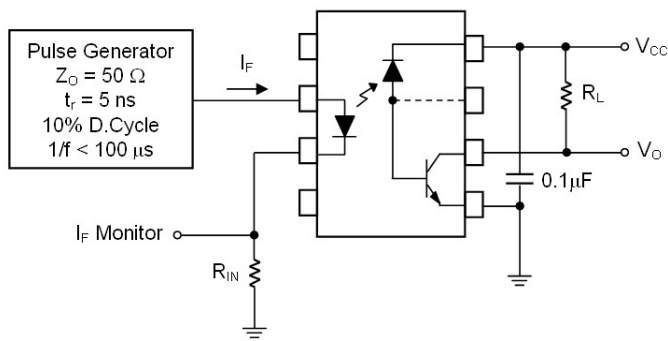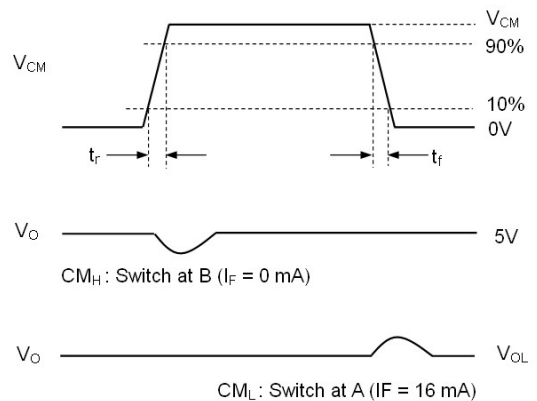

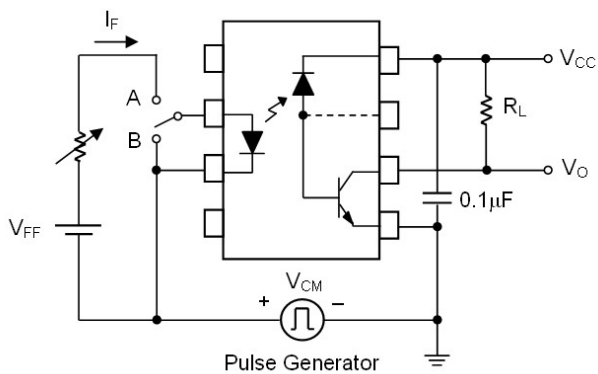

LIGHTING FOREVER

# 8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR PHOTOCOUPLER

**6N135 6N136  
EL4502**

### Note:

\*3 Common mode transient immunity in logic high level is the maximum tolerable (positive)  $dV_{cm}/dt$  on the leading edge of the common mode pulse signal VCM, to assure that the output will remain in a logic high state (i.e.,  $V_O > 2.0V$ ).

Common mode transient immunity in logic low level is the maximum tolerable (negative)  $dV_{cm}/dt$  on the trailing edge of the common mode pulse signal, VCM, to assure that the output will remain in a logic low state (i.e.,  $V_O < 0.8V$ ).

### Order Information

#### Part Number

**6N13XY(Z)-V**

or

**EL4502Y(Z)-V**

### Note

- X = Part No. (X = 5 or 6)
- Y = Lead form option (S, S1, M or none)
- Z = Tape and reel option (TA, TB or none)
- V = VDE (optional)


| Option  | Description   | Packing quantity    |
|---------|---|---------------------|
| None    | Standard DIP-8  | 45 units per tube   |
| M       | Wide lead bend (0.4 inch spacing)                             | 45 units per tube   |
| S (TA)  | Surface mount lead form + TA tape & reel option               | 1000 units per reel |
| S (TB)  | Surface mount lead form + TB tape & reel option               | 1000 units per reel |
| S1 (TA) | Surface mount lead form (low profile) + TA tape & reel option | 1000 units per reel |
| S1 (TB) | Surface mount lead form (low profile) + TB tape & reel option | 1000 units per reel |

**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR  
PHOTOCOUPLER**


**6N135 6N136  
EL4502**

**Package Drawing  
(Dimensions in mm)**

**Standard DIP Type**

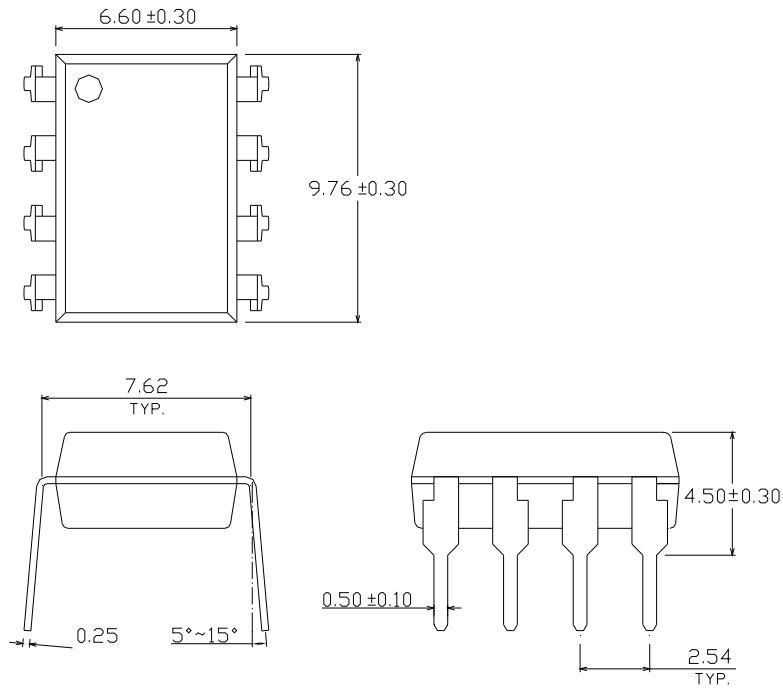

**Option M Type**

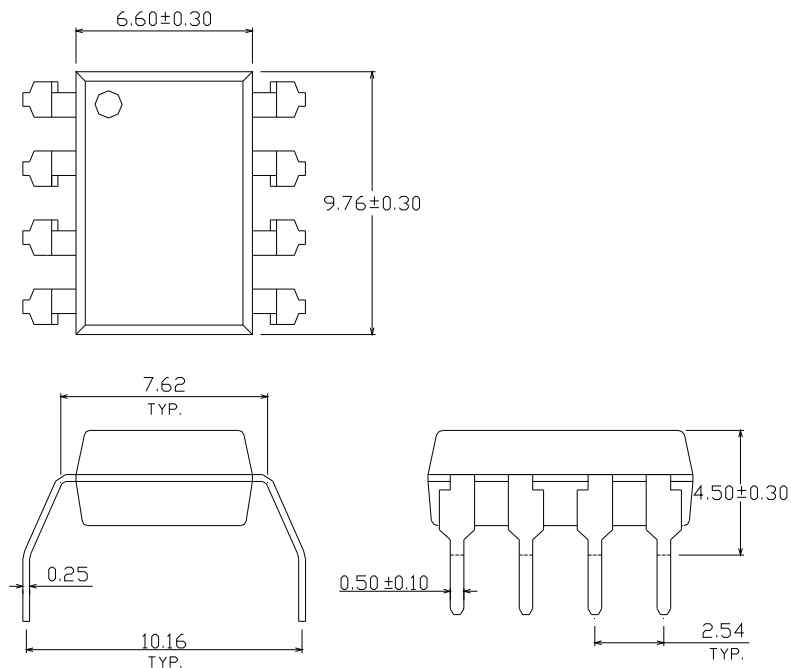





**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR  
PHOTOCOUPLER**

**6N135 6N136  
EL4502**

**Option S Type**

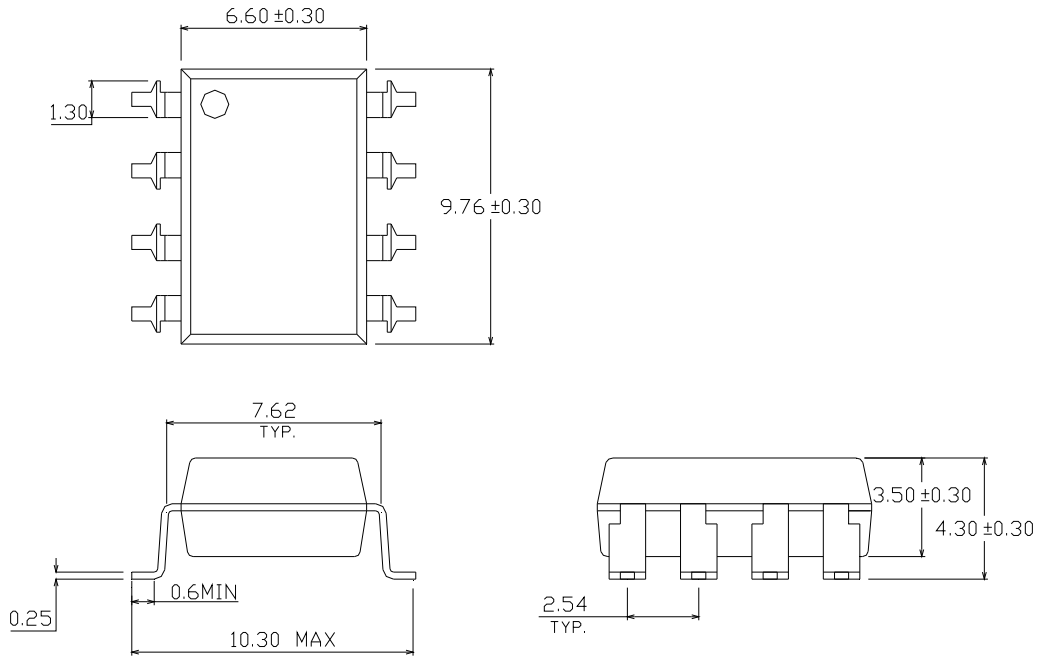


**Option S1 Type**

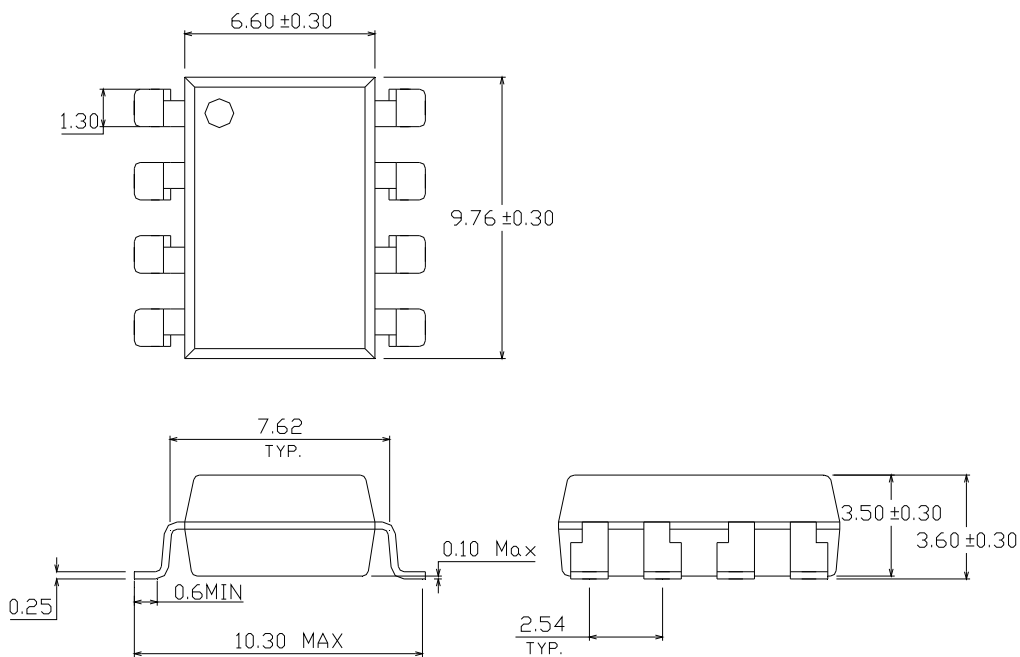


**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR  
PHOTOCOUPLER**

**6N135 6N136  
EL4502**

**Recommended pad layout for surface mount leadform**

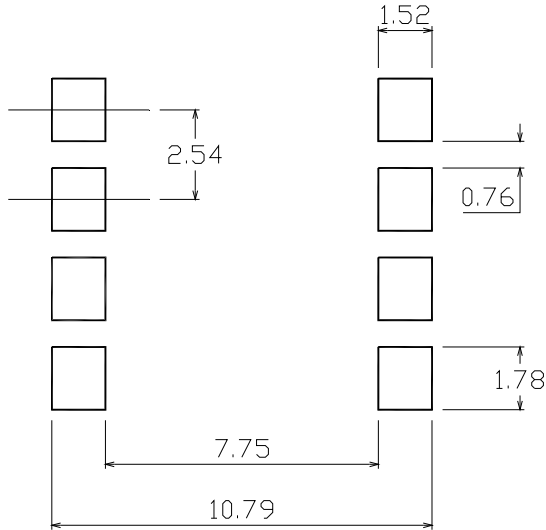

**Device Marking**

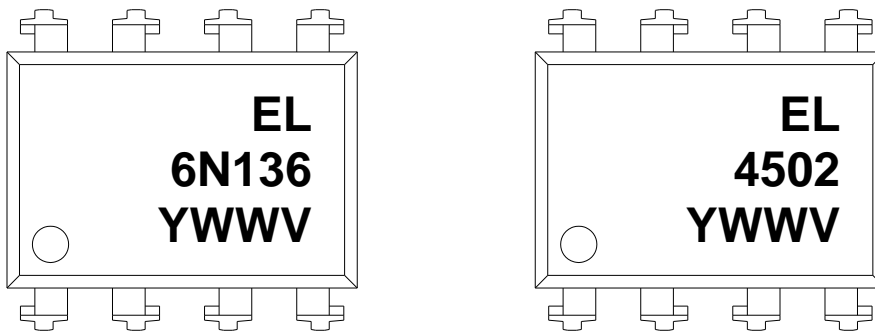


**Notes**

- 4502
- 6N136 denotes Device Number
- Y denotes 1 digit Year code
- WW denotes 2 digit Week code
- V denotes VDE (optional)


**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR  
PHOTOCOUPLER**

**6N135 6N136  
EL4502**

**Tape & Reel Packing Specifications**

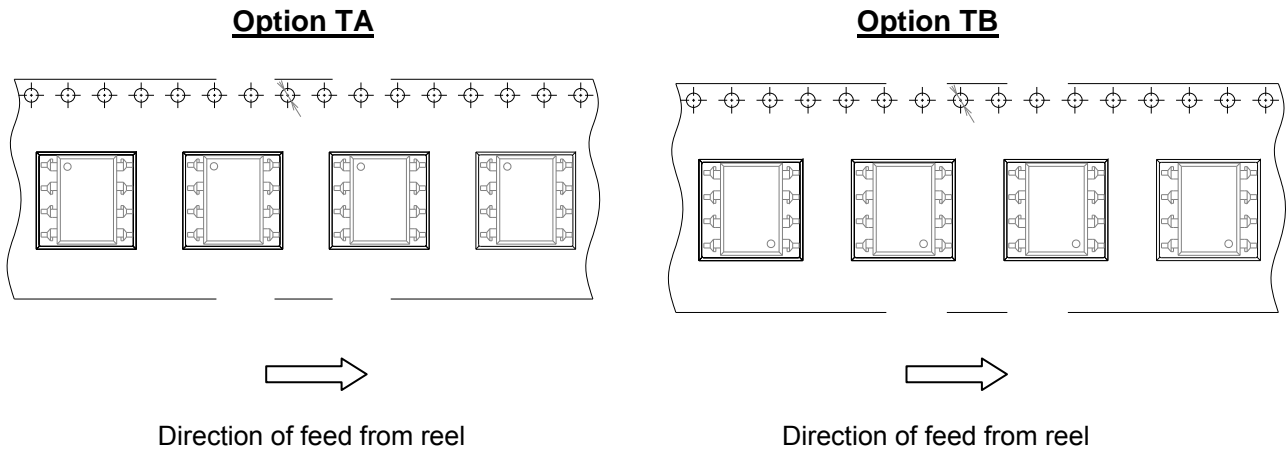

**Tape dimensions**

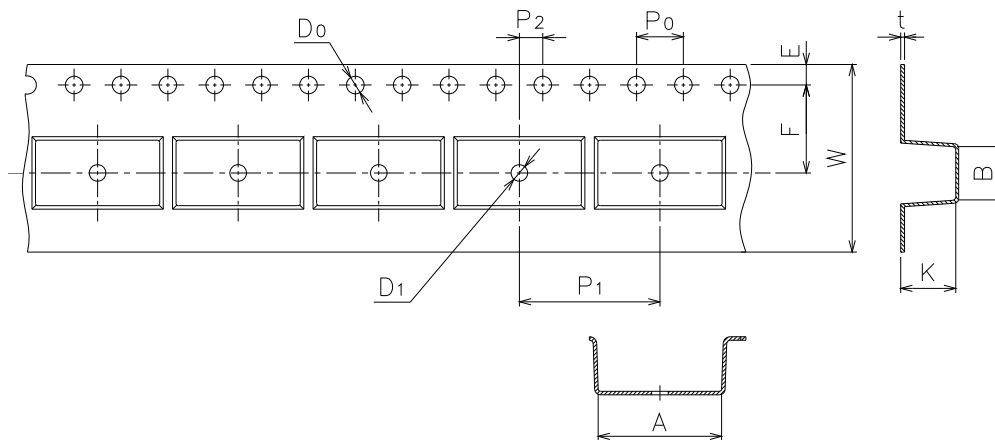


|               |           |           |           |           |                   |          |
|---------------|-----------|-----------|-----------|-----------|-------------------|----------|
| Dimension No. | <b>A</b>  | <b>B</b>  | <b>Do</b> | <b>D1</b> | <b>E</b>          | <b>F</b> |
| Dimension(mm) | 10.4±0.1  | 10.0±0.1  | 1.5±0.1   | 1.5±0.1   | 1.75±0.1          | 7.5±0.1  |
| Dimension No. | <b>Po</b> | <b>P1</b> | <b>P2</b> | <b>t</b>  | <b>W</b>          | <b>K</b> |
| Dimension(mm) | 4.0±0.1   | 12.0±0.1  | 2.0±0.1   | 0.4±0.1   | 16.0+0.3/<br>-0.1 | 4.5±0.1  |

**8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR  
PHOTOCOUPLER**

**6N135 6N136  
EL4502**

**Solder Reflow Temperature Profile**

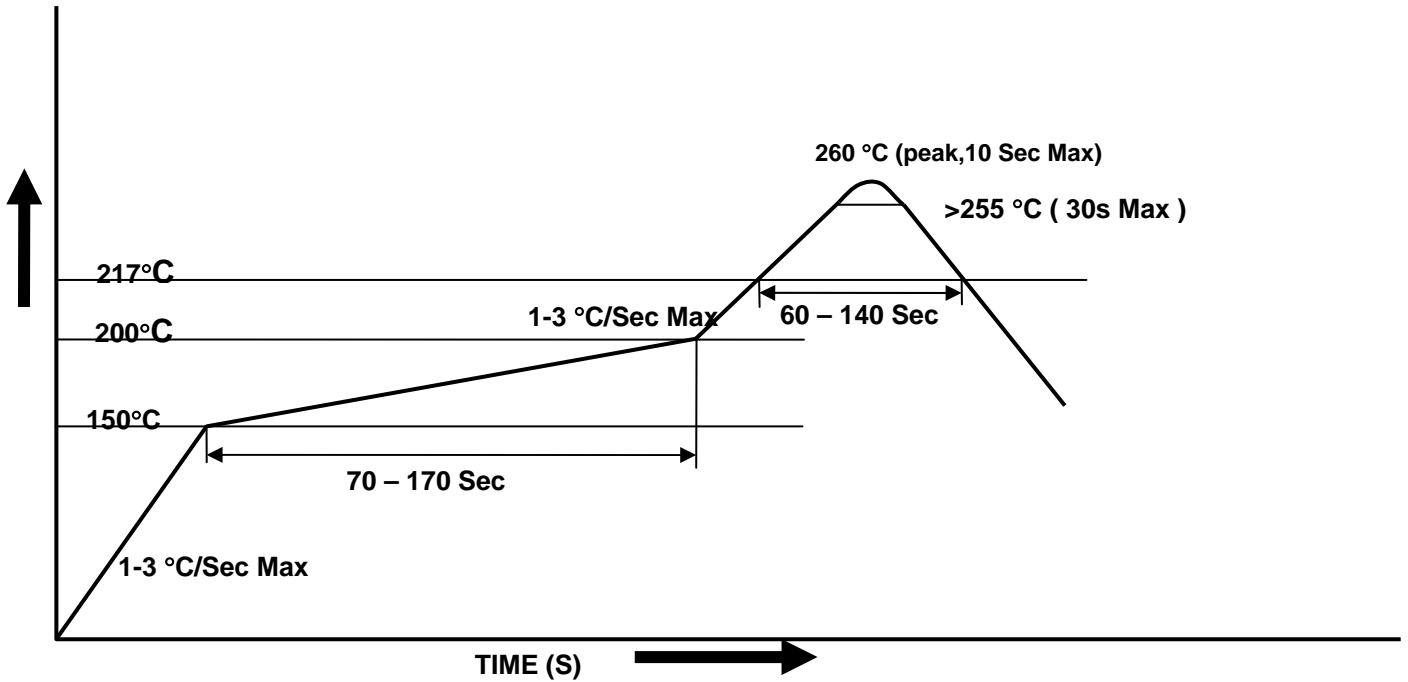



LIGHTING FOREVER

## 8 PIN DIP HIGH SPEED 1Mbit/s TRANSISTOR PHOTOCOUPLER

6N135 6N136  
EL4502

---

### DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.