


# SURFACE MOUNT LED LAMP

## Super Bright (0603) Chip Type - Water Clear


### PACKAGE DIMENSIONS

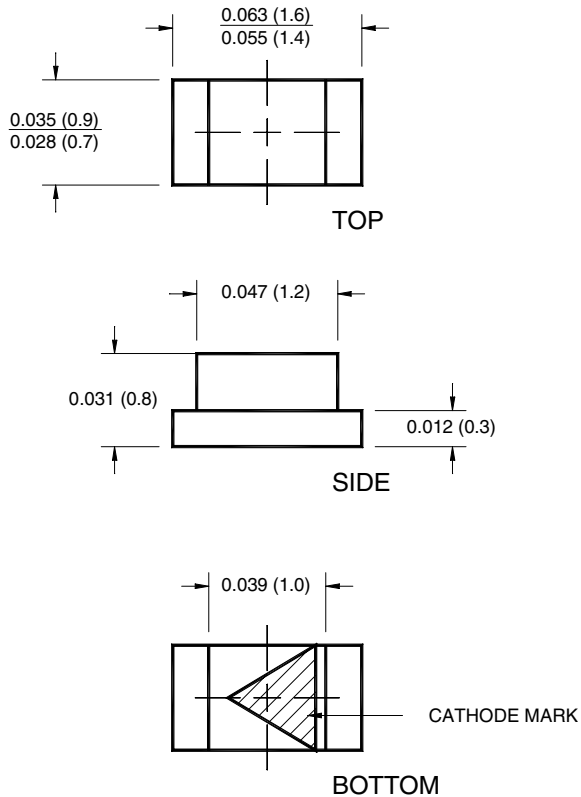

**NOTE:**

Dimensions for all drawings are in inches (mm).

SUPER BRIGHT RED	QTLP600C-R
SUPER BRIGHT ORANGE	QTLP600C-E
SUPER BRIGHT YELLOW	QTLP600C-Y



### FEATURES

- AllInGaP technology
- Ultra-miniature
- Industrial standard footprint
- Water clear optics
- Moisture-proof packaging
- Available in 0.315" (8mm) width tape on 7" (178mm) diameter

### DESCRIPTION

These surface mount lamps are designed to fit industry standard profile and footprint for the ultra-miniature chip type 0603. The low profile package and 100° viewing angle make this chip type LED ideal for panel illumination, push button lighting and membrane switch applications.

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	RED QTLP600C-R	ORANGE QTLP600C-E	YELLOW QTLP600C-Y	Units
Continuous Forward Current - I <sub>F</sub>	30	30	20	mA
Peak Forward Current - I <sub>F</sub> (f = 1.0 KHz, Duty Factor = 1/10)	160	160	200	mA
Reverse Voltage - V <sub>R</sub> (I <sub>R</sub> = 10 μA)	5	5	5	V
Power Dissipation - P <sub>D</sub>	85	100	100	mW
Operating Temperature - T <sub>OPR</sub>	-40 to +85			°C
Storage Temperature - T <sub>STG</sub>	-40 to +100			°C
Lead Soldering Time - T <sub>SOL</sub>				°C
Wave	260 for 5 sec			
Reflow	260 for 10 sec			

SUPER BRIGHT RED	QTLP600C-R
SUPER BRIGHT ORANGE	QTLP600C-E
SUPER BRIGHT YELLOW	QTLP600C-Y

### ELECTRICAL / OPTICAL CHARACTERISTICS (T<sub>A</sub> = 25°C)

Part Number	RED QTLP600C-R	ORANGE QTLP600C-E	YELLOW QTLP600C-Y	Condition
Luminous Intensity (mcd)				I <sub>F</sub> = 20mA
Minimum	20	20	20	
Typical	40	40	40	
Forward Voltage (V)				I <sub>F</sub> = 20mA
Maximum	2.4	2.8	2.8	
Typical	2.0	2.1	2.1	
Peak Wavelength (nm)	630	620	590	I <sub>F</sub> = 20mA
Spectral Line Half Width (nm)	20	18	15	I <sub>F</sub> = 20mA
Viewing Angle (°)	100	100	100	I <sub>F</sub> = 20mA

### TYPICAL PERFORMANCE CURVES

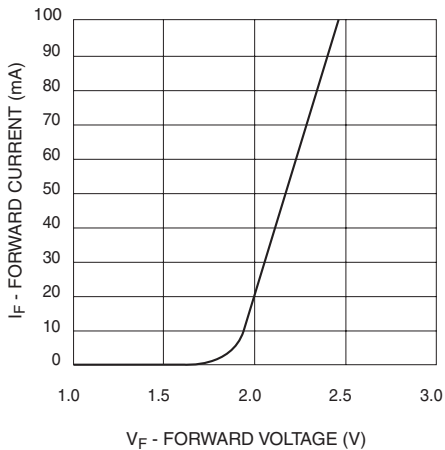


Fig. 1 Forward Current vs. Forward Voltage


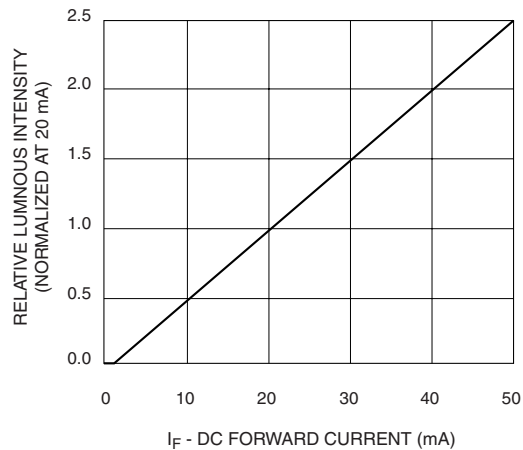


Fig. 2 Relative Luminous Intensity vs. DC Forward Current


# SURFACE MOUNT LED LAMP

## Super Bright (0603) Chip Type - Water Clear


SUPER BRIGHT RED	QTLP600C-R
SUPER BRIGHT ORANGE	QTLP600C-E
SUPER BRIGHT YELLOW	QTLP600C-Y

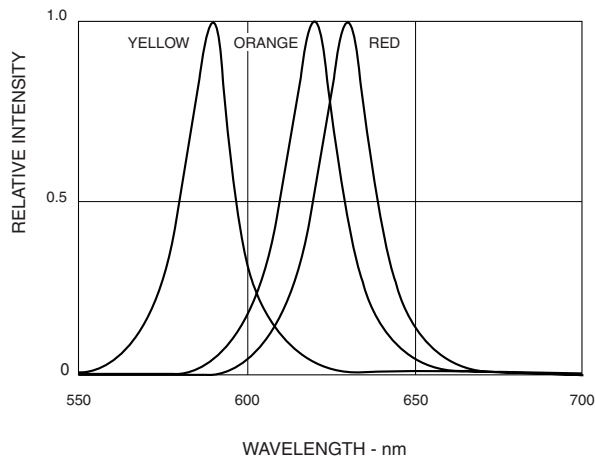

**Fig. 3 Relative Intensity vs Peak Wavelength**

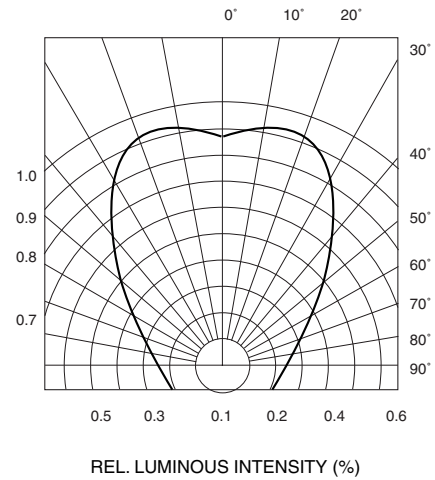

**Fig. 4 Radiation Diagram**

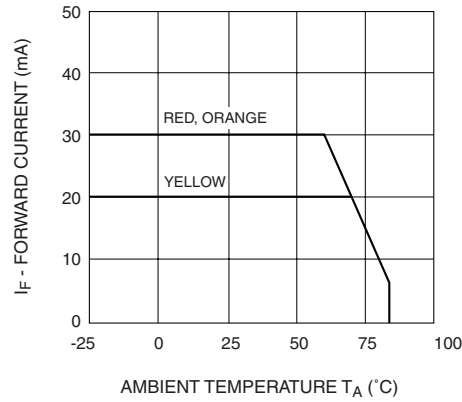


**Fig.5 Forward Current vs. Ambient Temperature**

# SURFACE MOUNT LED LAMP


## Super Bright (0603) Chip Type - Water Clear

SUPER BRIGHT RED	QTLP600C-R
SUPER BRIGHT ORANGE	QTLP600C-E
SUPER BRIGHT YELLOW	QTLP600C-Y

### RECOMMENDED PRINTED CIRCUIT BOARD PATTERN

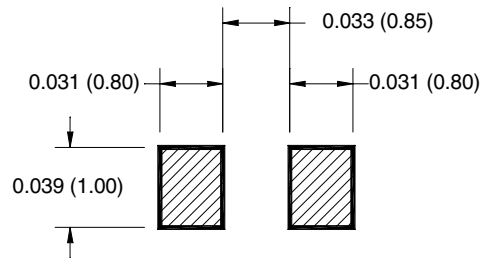

### RECOMMENDED IR REFLOW SOLDERING PROFILE

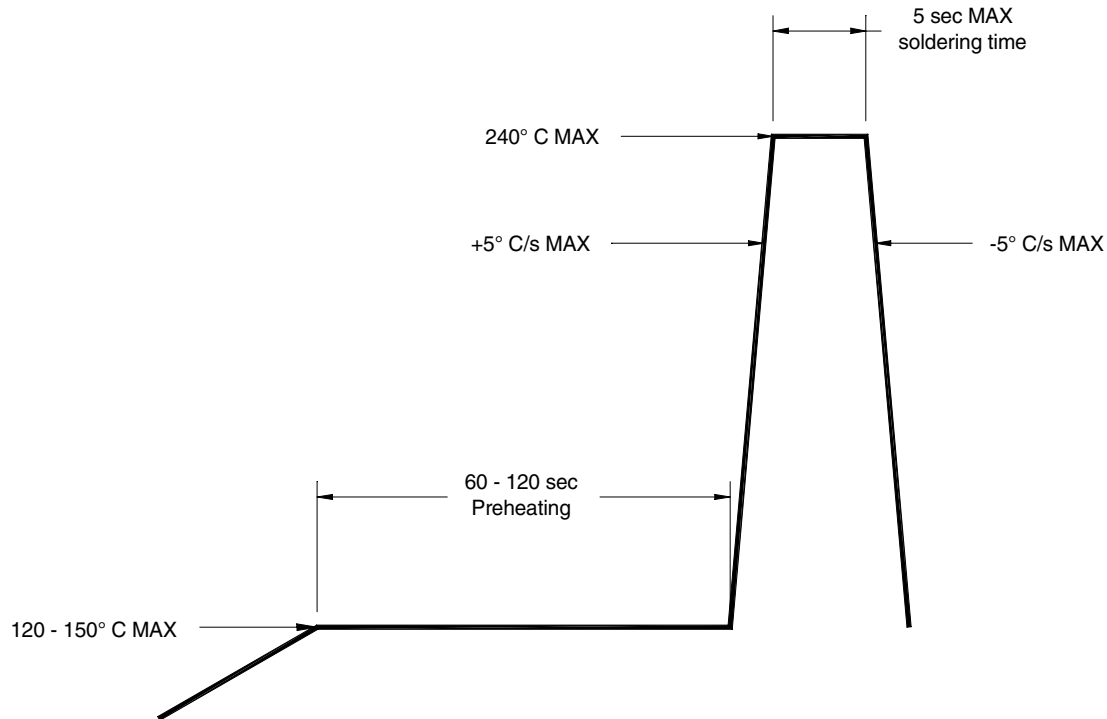

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.