


Cell Type CR2

Specifications

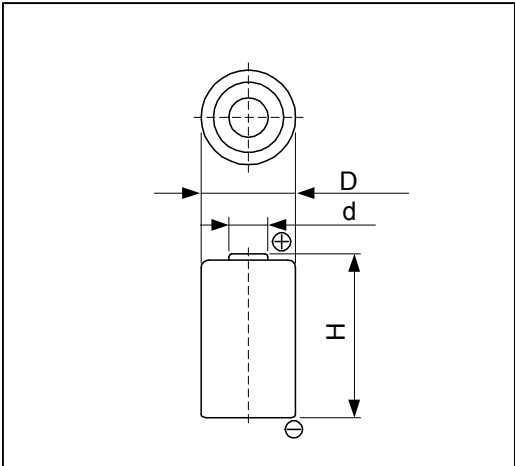


Nominal Capacity ^{*1}		850mAh
Nominal Voltage		3V
Standard Discharge Current		10mA
Max. Discharge Current	Continuous ^{*2}	1000mA
	Pulse ^{*3}	2500mA
Temperature Range		-20°C ~ 60°C
Weight		11g
Dimensions	D	15.6mm
	H	27.0mm
	d	6.3mm


- ^{*1} Nominal capacity is determined to an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at 23°C.
- ^{*2} Current value is determined to be the level at which 50% of the nominal capacity is obtained with an end voltage of 2.0V at 23 °C.
- ^{*3} Current value for obtaining 1.0V cell voltage when pulse is applied for 15seconds at 50% discharge depth at 23 °C.

Typical Characteristics

Pulse Discharge Characteristics of CR2

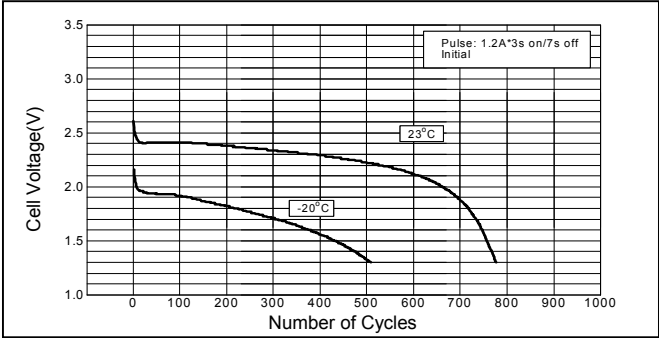

Pulse Discharge Characteristics of CR2

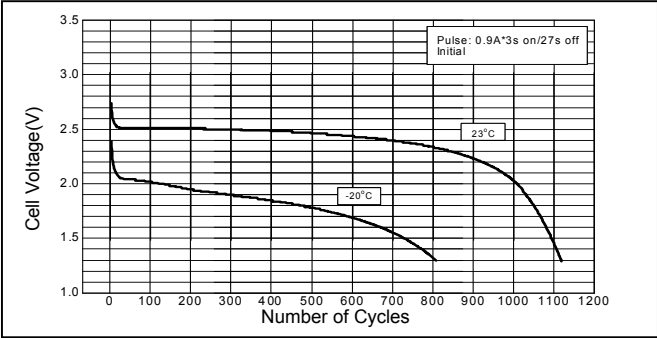

Discharge Characteristics of CR23A

