



AS85049/19

Straight EMI/RFI Non-Environmental Backshell

CONNECTOR DESIGNATOR:

H MIL-DTL-38999 Series III and IV
EN3645

Finish

N = Electroless Nickel
W = Cadmium, Olive Drab
X = Nickel Fluorocarbon Polymer
Z = Zinc Nickel

M85049/19

Basic
Part Number

11

Shell Size
(Table I)


W

Clamp Size
(Table II)

03

Length
Code
(Omit for
Standard)
(Table III)

A

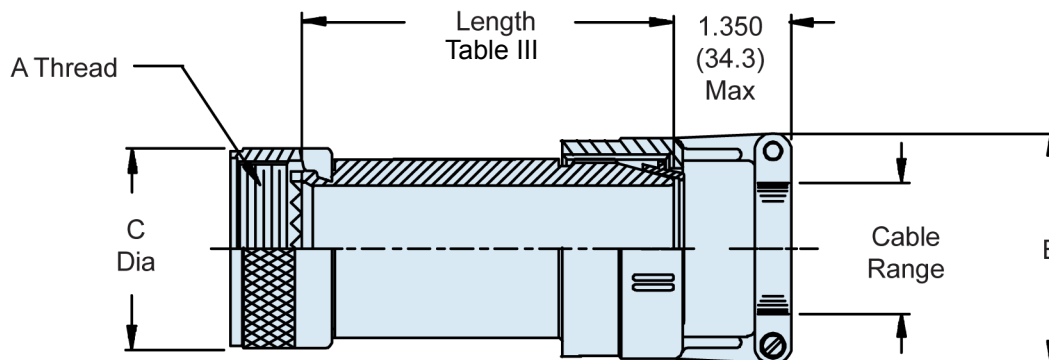

APPLICATION NOTES

1. For complete dimensions see the applicable Military Specification.
2. Metric dimensions (mm) are in parentheses.
3. Cable Range is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.

AS85049/19

Straight EMI/RFI Non-Environmental Backshell



EMI/RFI Non-Environ.
Backshells

TABLE I: Shell Size and Clamp Size				
Shell Size	Clamp Size		A Thread	C Dia
	Min	Max	Class 6H	Max
9	01	02	M12 X 1 - 6H	.750 (19.1)
11	01	03	M15 X 1 - 6H	.850 (21.6)
13	02	04	M18 X 1 - 6H	1.000 (25.4)
15	02	05	M22 X 1 - 6H	1.100 (27.9)
17	02	06	M25 X 1 - 6H	1.250 (31.8)
19	03	07	M28 X 1 - 6H	1.400 (35.6)
21	03	08	M31 X 1 - 6H	1.500 (38.1)
23	03	09	M34 X 1 - 6H	1.650 (41.9)
25	04	10	M37 X 1 - 6H	1.700 (43.2)

TABLE II: Cable Range and Dimensions				
Clamp Size	Cable Range		E	
	Min	Max	Min	Max
01	.062 (1.6)	.125 (3.2)	.800 (20.3)	
02	.125 (3.2)	.250 (6.4)	1.000 (25.4)	
03	.250 (6.4)	.375 (9.5)	1.100 (27.9)	
04	.312 (7.9)	.500 (12.7)	1.200 (30.5)	
05	.437 (11.1)	.625 (15.9)	1.250 (31.8)	
06	.562 (14.3)	.750 (19.1)	1.400 (35.6)	
07	.687 (17.4)	.875 (22.2)	1.500 (38.1)	
08	.812 (20.6)	1.000 (25.4)	1.650 (41.9)	
09	.937 (23.8)	1.125 (28.6)	1.750 (44.5)	
10	1.062 (27.0)	1.250 (31.8)	1.900 (48.3)	

TABLE III: Length Code		
Length Code	Available Shell Sizes	Length
Std.	9 - 25	1.500 (38.1)
A	9 - 25	2.500 (63.5)
B	15 - 25	3.500 (88.9)
C	21 - 25	4.500 (114.3)

38