



A
B
C
D
E
F

A
B
C
D
E
F

- NOTE 1 THIS PRODUCT IS PACKAGED IN TRAY. (60pcs/TRAY)
2 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN'T AFFECT QUALITY LEVEL.
ALSO, BLACK SPOT COULD BE OBSERVED ON THE SURFACE OF HOUSING.
3 EACH CONTACT NO. IS APPLIED TO ADJACENT 6 LEADS AS A LINE.
4 MISALIGNMENT ABSORBING RANGE: $\pm 0.3\text{mm}$ max.
5 THE DIMENSION IN PARENTHESES ARE FOR REFERENCES.
6 LOT NO. IS INDICATED AT EITHER ONE OF THE POSITION AS SHOWN.

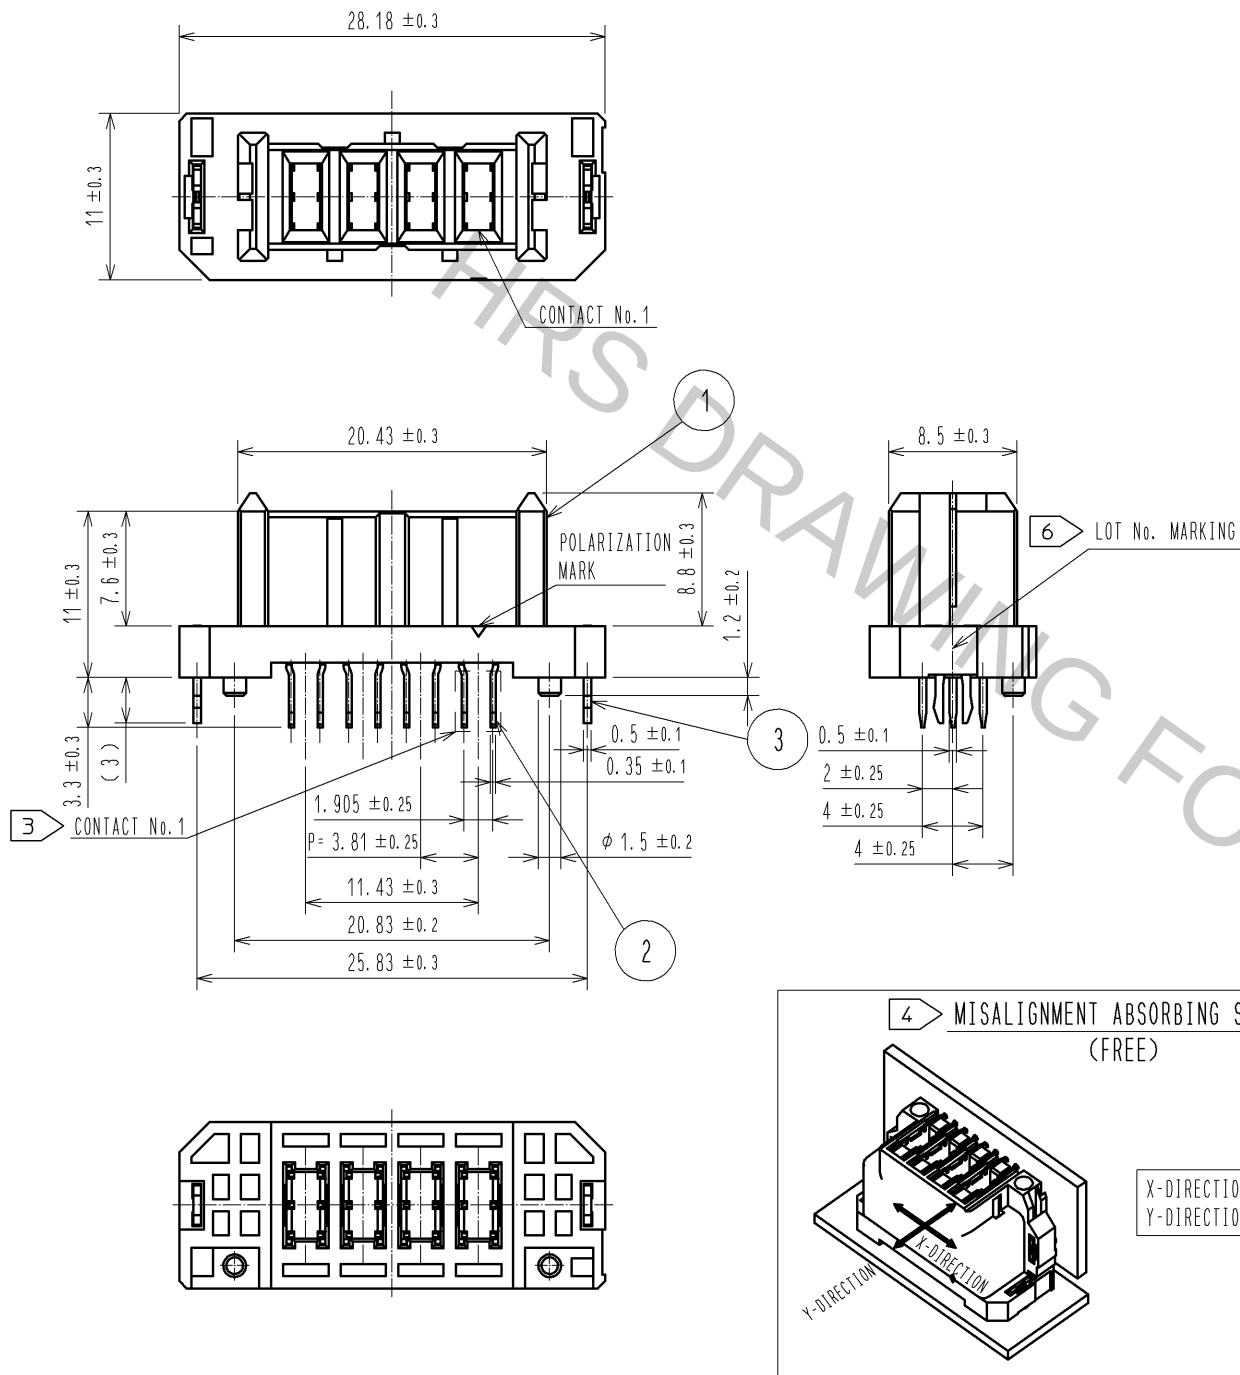

CROSS SECTION OF MATING(FREE)
VERTICAL CONNECTION

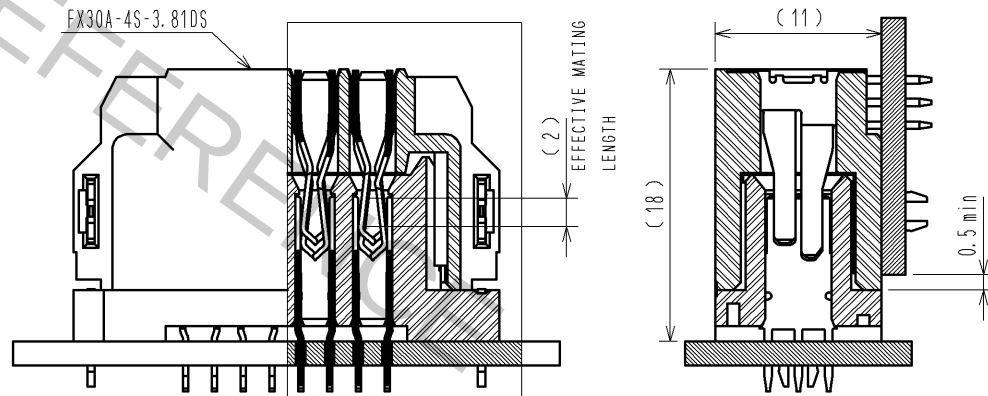

2	COPPER ALLOY	CONTACT AREA: GOLD-PLATING $0.1 \mu\text{m}$	4	POLYSTYRENE	
		LEAD AREA: TIN-PLATING $1.0 \mu\text{m}$			
		UNDER PLATING: NICKEL $1.0 \mu\text{m}$			
1	POLYAMIDE	BLACK UL94V-0	3	PHOSPHOR BRONZE	TIN-PLATING $3.0 \mu\text{m}$
NO. MATERIAL		FINISH, REMARKS	NO. MATERIAL		FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT		DESCRIPTION OF REVISIONS
HRS		HIROSE ELECTRIC CO., LTD.	APPROVED : HS. OKAWA		12.06.15
			CHECKED : KI. HIROKAWA		12.06.15
			DESIGNED : DK. AIMOTO		12.06.14
			DRAWN : DK. AIMOTO		12.06.14
			DRAWING NO.		EDC3-341814-00
			PART NO.		FX30A-4P-3.81DSA20
			CODE NO.		CL570-2102-3-00
					1/2

