


Staggered Connector Directly Mounted on Board

HIF2C Series

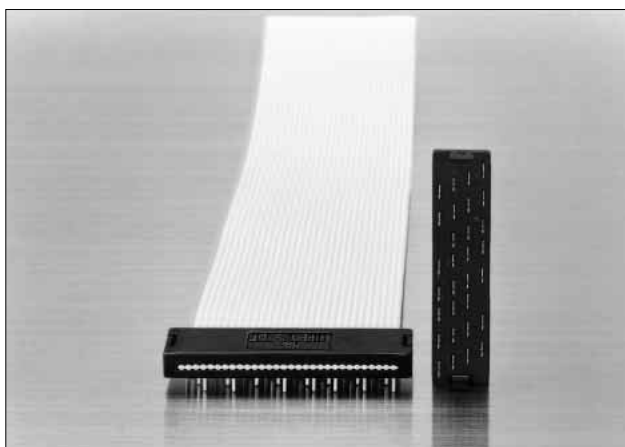

■ Features

1. Directly Mounted on Board

This connector can be directly mounted on the board using 1.27mm pitch flat cable.

2. Variation in Number of Contacts


The number of contacts contains 10, 16, 20, 26, 30, 34, 40, 50, and 60 contacts.

3. Low Profile Type

The connector height is lower than that of the HIF2E series.

4. Applicable Cable

The applicable cable is UL2651 AWG#28 flat cable (7 cores/.0.127mm, jacket dia. :0.8 to 1.0mm).

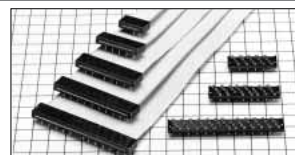

■ Applications

Computers, terminal equipment, PPC, various kinds of electronic equipment, business machines, etc.

■ Product Specifications

| Rating | Current rating: 1A Voltage rating: 200V AC | Operating Temperature Range:-55 to +85°C (Note 1) Operating Moisture Range:40 to 80% | Storage Temperature Range:-10 to +60°C(Note 2) Storage Humidity Range:40 to 70% (Note 2) |
|--------|---|---|---|
|--------|---|---|---|

| Item | Specification | Condition |
|---------------------------------|---|---|
| 1. Insulation Resistance | 1000M ohms min. | 500V DC |
| 2. Withstanding voltage | No flashover or insulation breakdown. | 650V AC/1 minute |
| 3. Contact Resistance | 15m ohms max. | 0.1A |
| 4. Vibration | No electrical discontinuity of 1μs or more | Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, 2 hours in each of the 3 directions. |
| 5. Humidity (Steady state) | Insulation resistance: 1000M ohms min. | 96 hours at temperature of 40°C and humidity of 90% to 95% |
| 6. Temperature Cycle | No damage, cracks, or parts looseness. | (-65°C: 30 minutes →15 to 35°C: 5 minutes max. 125°C: 30 minutes →15 to 35°C: 5 minutes max.) 5 cycles |
| 7. Resistance to Soldering heat | No deformation of components affecting performance. | Solder Bath: 260°C for 10 seconds |
| | | Manual soldering: 360°C for 5 seconds |

Note 1: Includes temperature rise caused by current flow.

Note 2: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers non conducting condition of installed connectors in storage, shipment or during transportation.

Note 3: Information contained in this catalog represents general requirements for this Series. Contact us for the drawings and specifications for a specific part number shown.

■ Material

| Part | Material | Finish | Remarks |
|-----------|------------------|---|---------|
| Insulator | PBT | Black | UL94V-0 |
| Contact | Beryllium copper | Contact area Gold plated over nickel underplated | — |


■ Ordering Information

HIF2C - ***** **DT** - **1.27** **R**
 ① ② ③ ④ ⑤

| | |
|--|--------------------------------------|
| ① Series Name: HIF 2C | ④ Contact Pitch: 1.27mm |
| ② Number of contacts: 10, 16, 20, 26, 30, 34, 40, 50, and 60 | ⑤ Connection type : R : ribbon cable |
| ③ Contact alignment: DT : staggered | |


HIF2C Series Staggered Connector Directly Mounted on Board

| Part Number | CL No. | Number of Contacts | A | B | RoHS |
|----------------------|---------------|--------------------|------|-------|------|
| HIF2C-10DT-1.27R(01) | 561-0075-0-01 | 10 | 17.8 | 11.43 | YES |
| HIF2C-16DT-1.27R(01) | 561-0077-6-01 | 16 | 25.4 | 19.05 | |
| HIF2C-20DT-1.27R(01) | 561-0079-1-01 | 20 | 30.5 | 24.13 | |
| HIF2C-26DT-1.27R(01) | 561-0081-3-01 | 26 | 38.1 | 31.75 | |
| HIF2C-30DT-1.27R(01) | 561-0083-9-01 | 30 | 43.2 | 36.83 | |
| HIF2C-34DT-1.27R(01) | 561-0085-4-01 | 34 | 48.3 | 41.91 | |
| HIF2C-40DT-1.27R(01) | 561-0087-0-01 | 40 | 55.9 | 49.53 | |
| HIF2C-50DT-1.27R(01) | 561-0089-5-01 | 50 | 68.6 | 62.23 | |
| HIF2C-60DT-1.27R(01) | 561-0091-7-01 | 60 | 81.3 | 74.93 | |

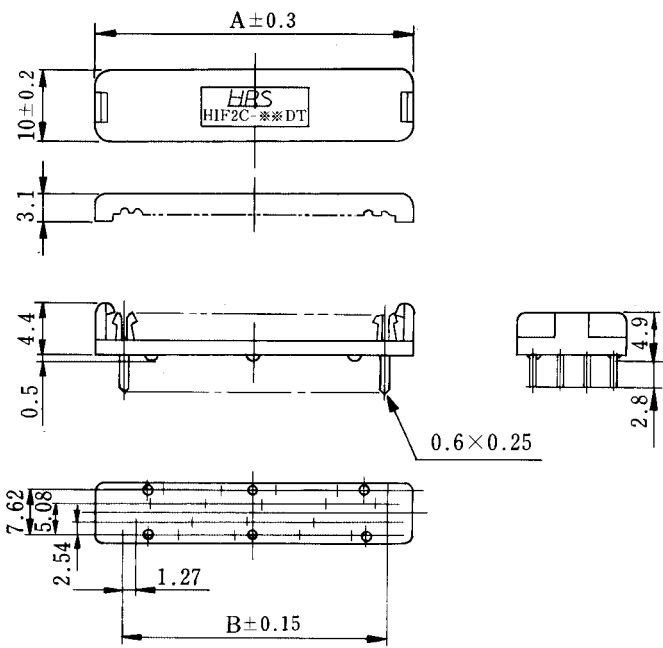


◆PCB mounting pattern


10 contacts

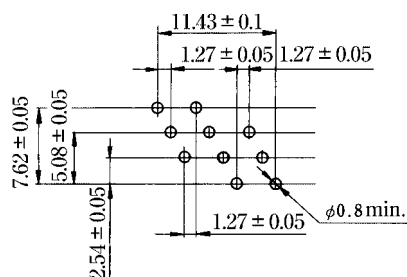


16 contacts

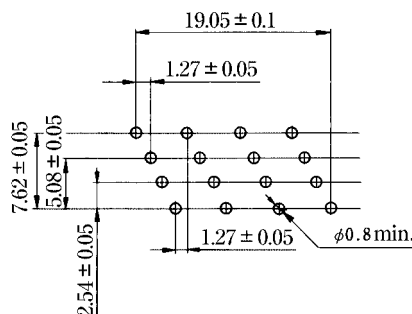


20 contacts

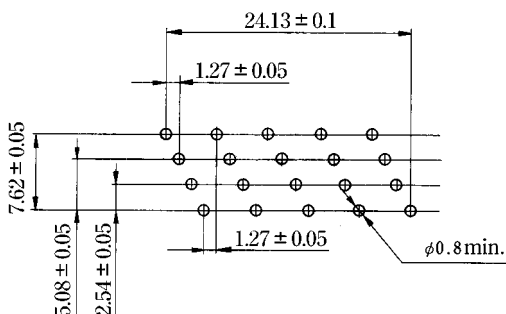

26 contacts

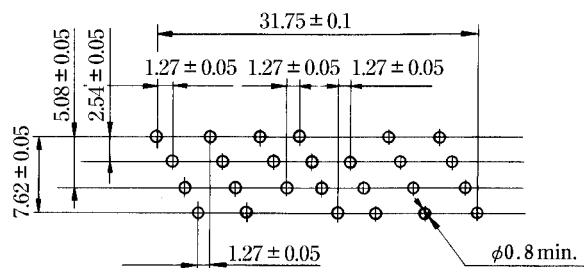


30 contacts

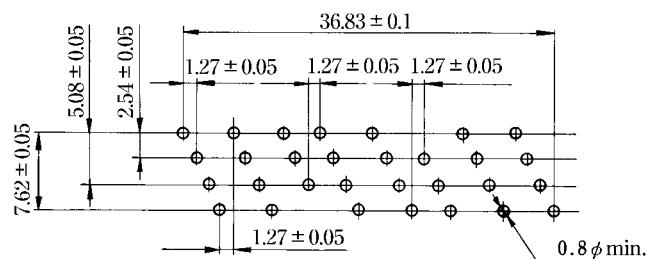


HIP2C Series Staggered Connector Directly Mounted on Board

◆PCB mounting pattern


34 contacts

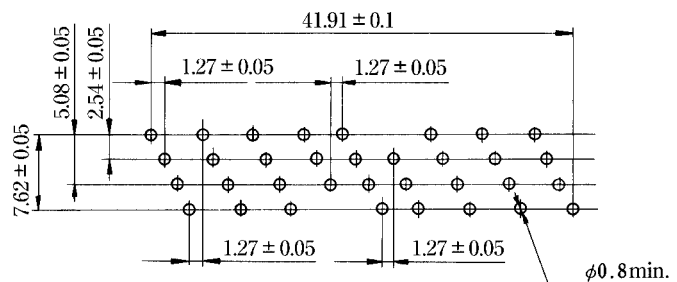

40 contacts

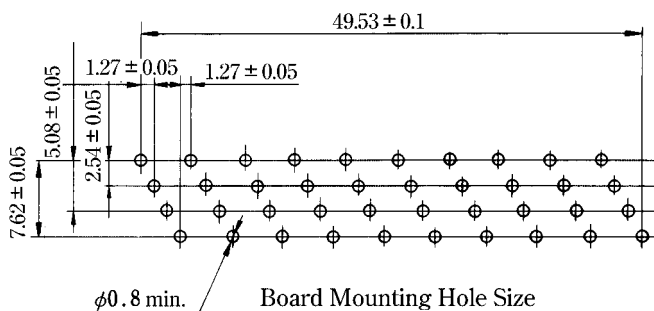

50 contacts

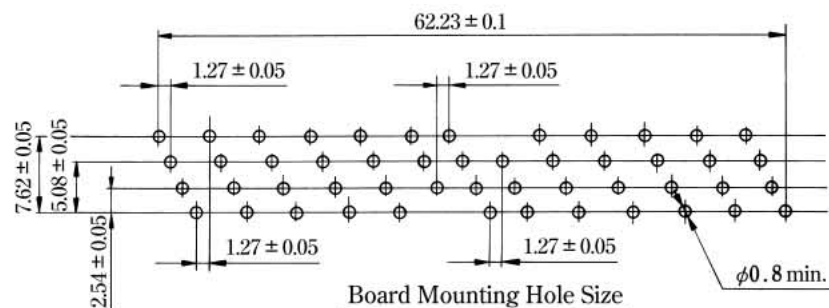

60 contacts

