

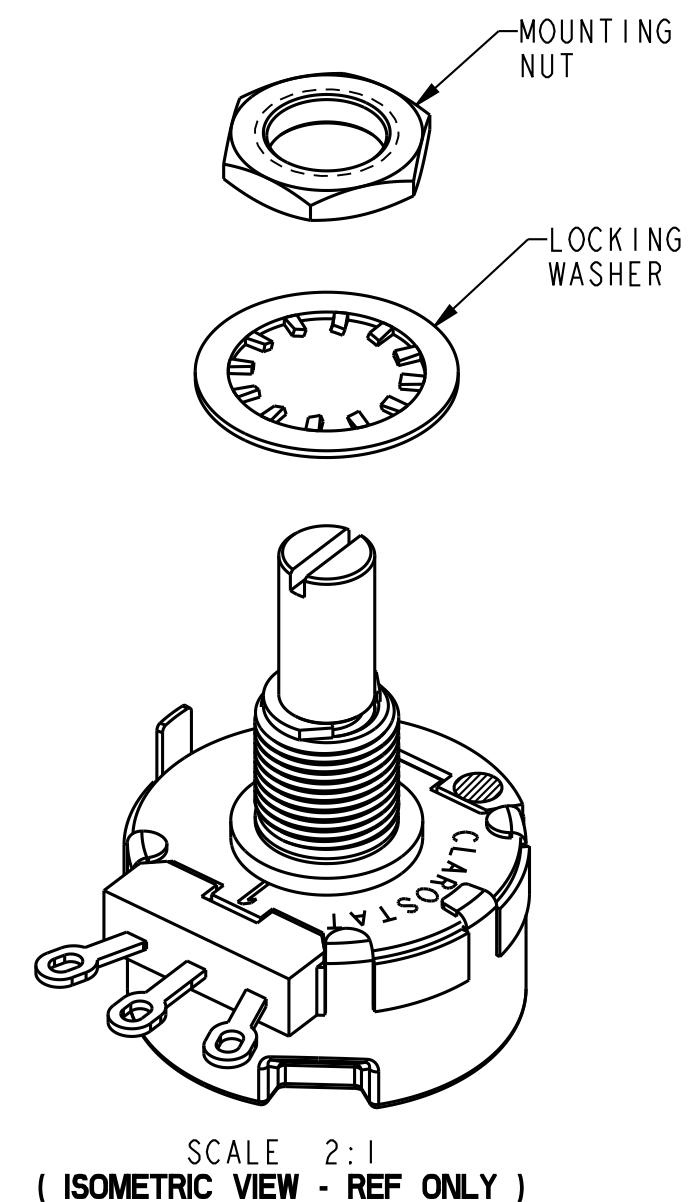
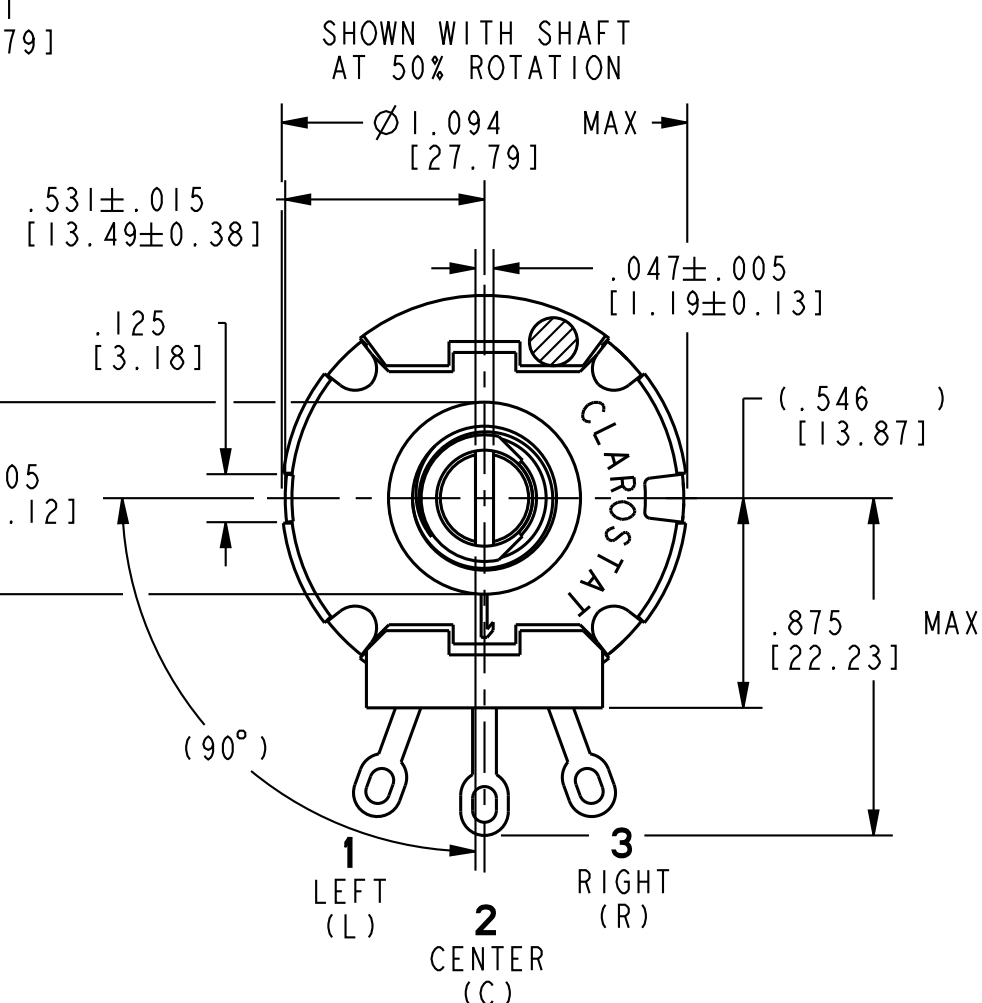
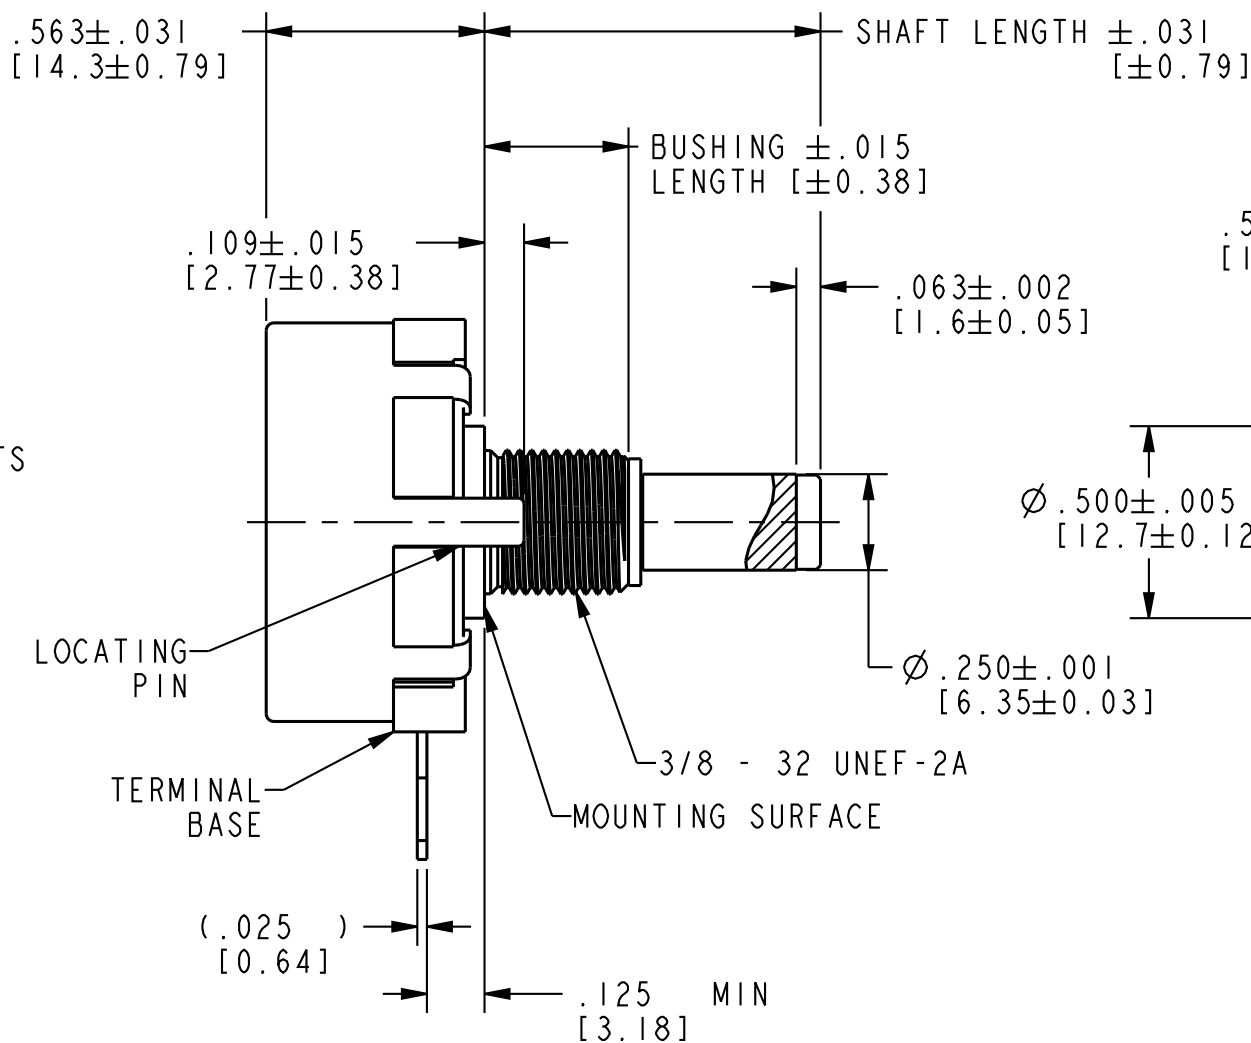


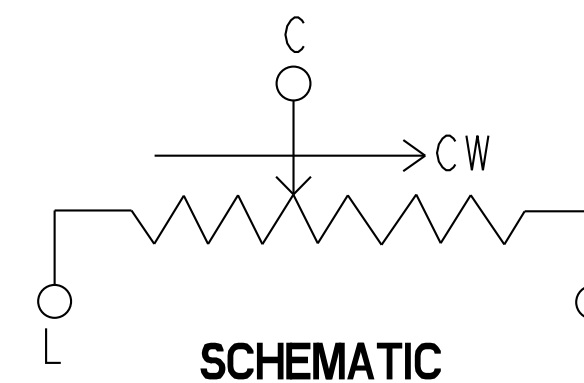

SERIES: 53C.
CONDUCTIVE PLASTIC ELEMENT.
SUPPLIED WITH MOUNTING NUT AND LOCKING WASHER, PACKAGED UNASSEMBLED.
MARKING INFORMATION SHOWN ON BOTTOM SURFACE.
REFER TO TABLE FOR SPECIFIC LISTING MARKING INFORMATION.
WEIGHT OF SINGLE CONTROL: .072 LBS [33 gm] APPROX.
VALUES ARE SHOWN IN STANDARD AND METRIC UNITS. METRIC UNITS ARE IN [].
IF CONVERSION DIFFERENCE EXISTS, THE STANDARD UNIT PREVAILS.

 - TAPER: LINEAR
 LINEARITY (INDEPENDENT): $\pm 5\%$
 MAX WORKING VOLTAGE: 500 VDC.
 DIELECTRIC STRENGTH: 1000 VAC FOR 60s @ ATM [1 MPa],
 450 VAC FOR 60s @ 3.4 IN Hg. [11.5 kPa].
 POWER RATING: 2W @ 158°F [70°C], DE-RATED TO 0 @ 248°F [120°C].
 CRV 3% MAX OF TOTAL RESISTANCE.
 END RESISTANCE: (REFER TO TABLE).
 RESISTANCE AND TOLERANCE: (REFER TO TABLE).
 ELECTRICAL ROTATION: (REFER TO TABLE).
 EFFECTIVE ELECTRICAL ROTATION: (REFER TO TABLE).

ROTATIONAL LIFE: 25,000 CYCLES.
OPERATING TEMPERATURE: -67°F [-55°C] TO 248°F [120°C].
ROTATIONAL TORQUE (REFER TO TABLE).
STOP TORQUE: (REFER TO TABLE).
MECHANICAL ROTATION: (REFER TO TABLE).

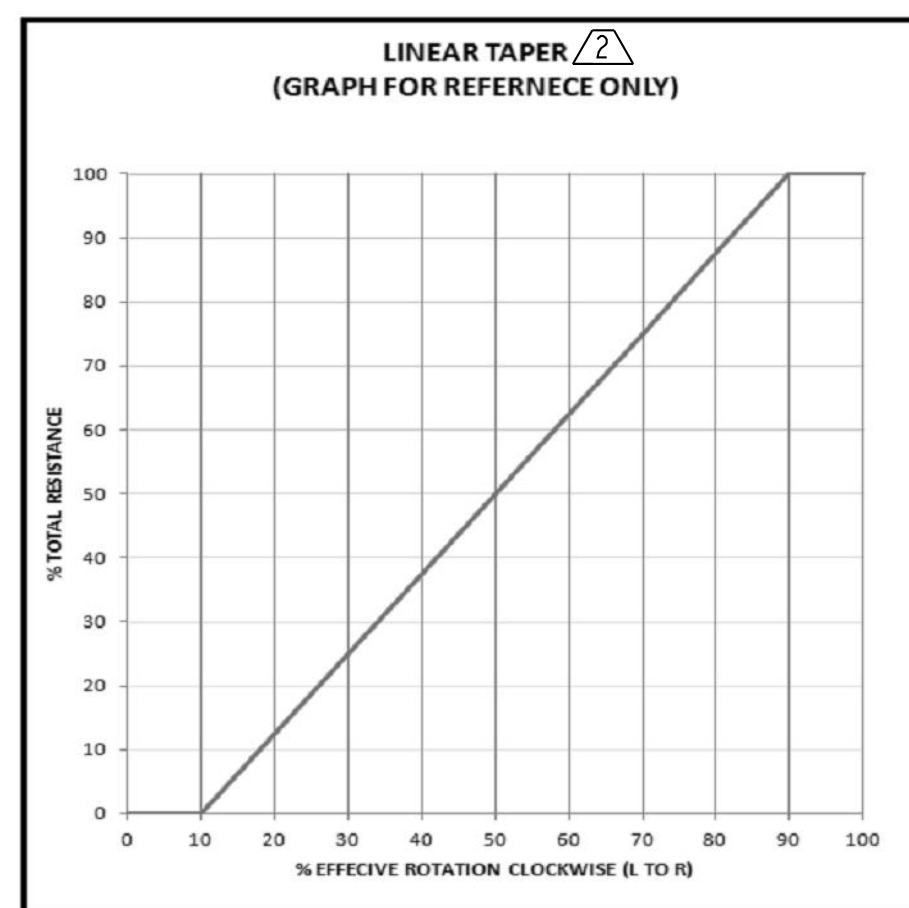

MATERIALS	
SHAFT	NICKEL PLATED BRASS
RETAINING RING	NICKEL PLATED BRASS
BUSHING	NICKEL PLATED BRASS
BUSHING PLATE	NICKEL PLATED BRASS
TERMINAL BASE	THERMOSET PLASTIC
TERMINALS	BRASS, SOLDER DIP FINISH (SEE LISTING TABLE)
COVER	STAINLESS STEEL
LOCK WASHER	NICKEL PLATED PHOS BRONZE
MOUNTING NUT	NICKEL PLATED BRASS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMAL TOL NO PLACE --- ±.400 1 PLACE --- ±.030 2 PLACE --- ±.010 3 PLACE --- ±.005 ANGULAR TOL - ±2° CHAMFER - ±5°		THIRD ANGLE PROJECTION 		Honeywell					
MATERIAL SEE TABLE FINISH		TITLE 53C, S-TAPER, SLOTTED SHAFT STD BUSHING, SOLDER TERMS							
		SIZE C		CAGE CODE -		DWG NO 53C-MATRIX-IDWG-4		TYPE I	REV A
		SCALE 2:1		REF WT: SEE NOTE		SHEET 1 of 2		HONEYWELL CONFIDENTIAL THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE, NOR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM HONEYWELL	
		RELEASE DATE 2014-04-08		DRW: B. MOHAPATRA 2014-03-14					
		RDE: M. MIKE 2014-03-14		QA: - -					
APPLICABLE DOCUMENTS: ASME Y14.100-2004 ASME Y14.5-2009		CHK: M. MIKE 2014-03-14							
COMPUTER GENERATED DRAWING: PRO/ENGINEER									

MULTI-SHEET DRAWING

LISTING	CHARACTERISTICS												MARKING 					LISTING SPECIFIC MATERIALS
	RES (Ω)	RES TOL (±%)	END RES @CCW (Ω MAX)	END RES @CW (Ω MAX)	ELEC ROT (±3°)	EFF ELEC ROT (TYP)	SHAFT LENGTH (IN[mm])	BUSHING LENGTH (IN[mm])	LOC PIN	MECH ROT (±3°)	ROT TORQUE (OZ-IN [mN·m])	STOP TORQUE (LB-IN [N·m], MIN)	LINE-1	LINE-2	LINE-3	LINE-4	LINE-5	SOLDER DIP
	53C33.5MEG	3.5MEG	20	10	312°	274°	.875 [22.23]	.375 [9.52]	I	312°	1 - 6 [7 - 42]	12 [1.4]	53C33.5MEG	3.5 MEGΩ	53C3-3.5MEG-S	20 YYWW	CLARO MEXICO	TIN-LEAD
53C345K	45K	10	4	4	312°	274°	.875 [22.23]	.375 [9.52]	I	312°	1 - 6 [7 - 42]	12 [1.4]	53C3-45K	20 XXXX	CLARO MEXICO			SAC305