
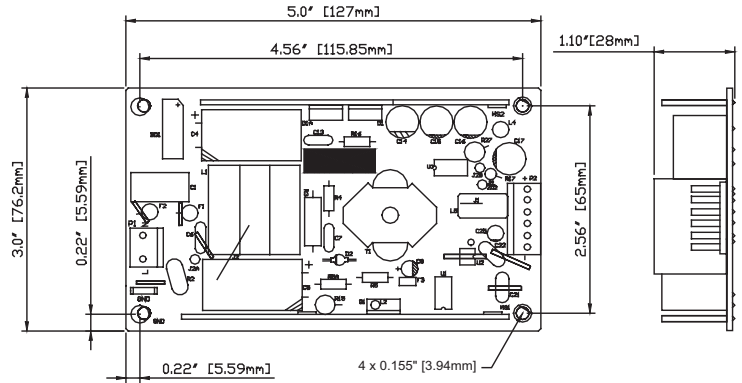


# MSM65 series

# 65 Watt Medical Grade Power Supply

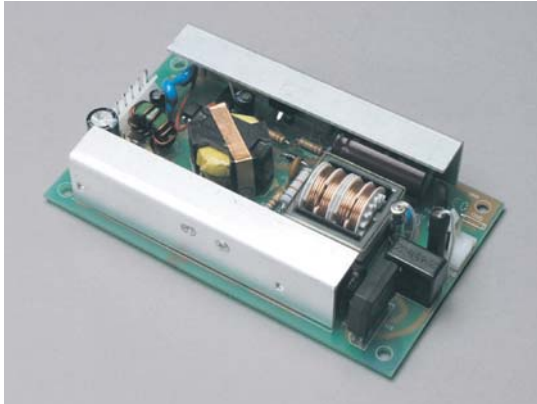

### Features

- Wide range AC input
- Fully regulated output
- High efficiency
- Medical grade approval
- 5 year warranty

### Environmental

- Operating temperature..... 0° C to 50° C
- Storage temperature..... -55° C to 85° C
- Weight = 0.85 lbs

### EMI/EMC

- Meets FCC class B, CISPR 11 class B
- EMC per EN60601-1-2

### Safety

- UR/cUR      UL2601-1
- CE Marked   EN60601-1-2:2001

Polarity	1	2	3	4	5	6
Input P1	Line	-	Neutral	-	-	-
Output P2	+V1	+V1	+V1	Com	Com	Com

Input P1 GND 0.25" FASTON TAB

### Input and Output Connections

- Input connector (P1) = AMP p/n 640445-3
- Input mating connector = AMP p/n 640250-3
- Output connector (P2) = AMP p/n 640445-6
- Output mating connector = AMP p/n 640250-6
- Mating connector contacts = AMP p/n 770476-\*

### Electrical Specifications

#### Input

- Voltage..... 100 - 240 VAC
- Current..... 2.0 Amp @ 100 VAC
- Frequency..... 50 - 60 Hz
- Max. Earth leakage current:

Test Voltage	Normal	Single-fault
132 VAC 60 Hz	40 uA	60 uA
264 VAC 50 Hz	62 uA	120 uA

#### Output

- Line regulation..... TYP +/- 0.5%
- Load regulation..... TYP +/- 2%
- Hold up time..... 20 ms min at full load, 115 VAC
- Transient response..... 2 ms for 50% to 100% load change
- Over voltage protection..... Built-in
- Over current protection..... Built-in
- Short circuit protection..... Pulsing mode, auto recovery
- Efficiency..... 80% min at full load and 115 VAC
- Ripple/noise (V<sub>p-p</sub>)..... +/-1% (20 MHz bandwidth)

Model No.	Voltage	Power	Current
MSM6512	12V	65W	5.4A
MSM6515	15V	65W	4.3A
MSM6524	24V	65W	2.7A