


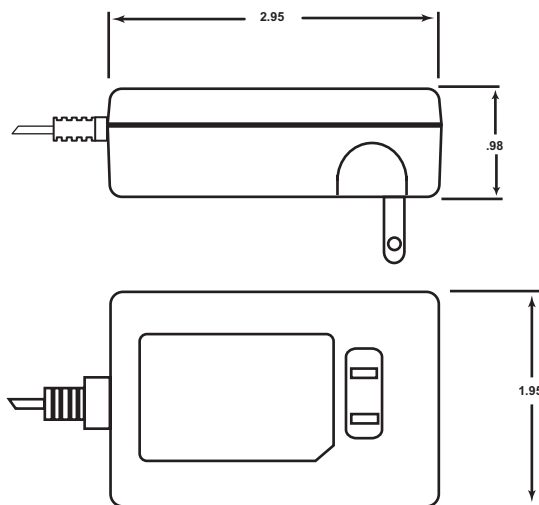

### Features:

N.A. AC input  
Fully enclosed plastic case  
Fully regulated output  
High Efficiency  
Warranty: 5 years

### Environmental

Operating temperature....0° C to 40° C  
Storage temperature.....-55° C to 85° C  
Weight: 0.5 lbs

### EMI

Meets FCC class B

### Safety

UL 1950  
cUL Listed to CSA 22.2 No. 950

### Electrical specifications

#### Input

Voltage.....90-132VAC  
Current.....0.75A  
Frequency.....47-63 Hz  
Input connector.....2 Pin NEMA 5/15 plug

#### Output

Line regulation.....TYP 1%  
Load regulation.....5% Max  
Set point..... 5% of rated output  
Hold up time.....12 ms min. at full load 115 V

Over voltage protection.....Built-in  
Over current protection.....Built-in  
Short circuit protection.....Pulsing Mode, auto recovery  
Ripple/noise(Vp-p).....1%  
Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

Polarity: COM  +V

### Output Electrical Specifications

| Model No.  | Voltage | Power | Current |
|------------|---------|-------|---------|
| WP1205-760 | 5       | 12    | 2.4A    |
| WP1215-760 | 15      | 12    | 0.8A    |
| WP1212-760 | 12      | 12    | 1A      |
| WP1224-760 | 24      | 12    | 0.5A    |

