



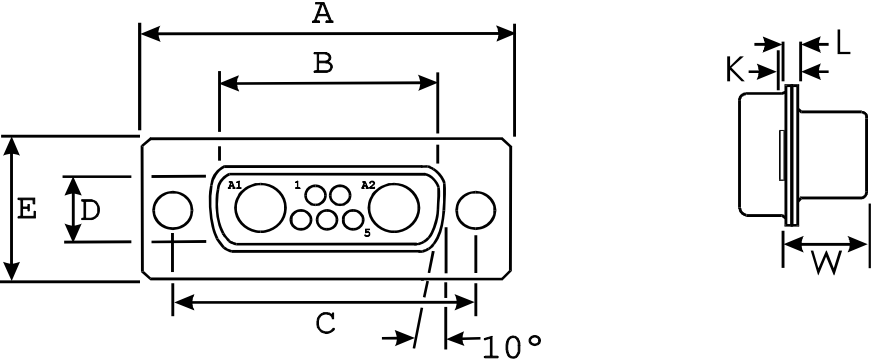


A ± 0,38 (.015)	B ± 0,13 (.005)	C ± 0,13 (.005)	D ± 0,13 (.005)	E ± 0,38 (.015)	L ± 0,25 (.010)	W ± 0,41 (.016)	K ± 0,32 (.013)
39,14 (1.541)	25,25 (.994)	33,32 (1.312)	8,36 (.329)	12,55 (.494)	0,76 (.030)	6,69 (.264)	1,21 (.048)

No mounting hardware selected
with 3,05 (.120) mounting hole

Signal contacts
not shown for clarity



Solder cup signal contacts



DESCRIPTION	MATERIAL	FINISH
Insulator	Thermo-Plastic	None, (Color Black)
Shells	Steel	Tin, with grounding dimples
Signal Contacts	Copper alloy	Gold over Ni
Unless otherwise specified, dimensions are in mm & (in.) Tolerances are (.XXX = mm) Decimals Angles .X ± 0,20 (.008) X° ± 1.0° .XX ± 0,10 (.004) .XXX ± 0,05 (.002)	Issue Date:	2-Oct-14
	Cannon	ITT Industries
	CONNECTOR, PLUG, ELECTRICAL COMBO D 7W2 SOLDER CUP	
	PART NO.	DAM7W2PK87