


# HiPerFAST™ IGBT with Diode

**IXGK 50N50BU1**  
**IXGK 50N60BU1**

| $V_{CES}$ | $I_{C25}$ | $V_{CE(sat)}$ | $t_{fi}$ |
|-----------|-----------|---------------|----------|
| 500 V     | 75 A      | 2.3 V         | 100ns    |
| 600 V     | 75 A      | 2.5 V         | 120ns    |


## Combi Pack

Preliminary data



| Symbol                                                                          | Test Conditions                                                                                                             | Maximum Ratings                          |           |                  |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----------|------------------|
|                                                                                 |                                                                                                                             | 50N50                                    | 50N60     |                  |
| $V_{CES}$                                                                       | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$                                                                             | 500                                      | 600       | V                |
| $V_{CGR}$                                                                       | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GE} = 1\text{ M}\Omega$                                               | 500                                      | 600       | V                |
| $V_{GES}$                                                                       | Continuous                                                                                                                  | $\pm 20$                                 | $\pm 20$  | V                |
| $V_{GEM}$                                                                       | Transient                                                                                                                   | $\pm 30$                                 | $\pm 30$  | V                |
| $I_{C25}$                                                                       | $T_C = 25^\circ\text{C}$                                                                                                    | 75                                       | 75        | A                |
| $I_{C90}$                                                                       | $T_C = 90^\circ\text{C}$                                                                                                    | 50                                       | 50        | A                |
| $I_{CM}$                                                                        | $T_C = 25^\circ\text{C}$ , 1 ms                                                                                             | 200                                      | 200       | A                |
| <b>SSOA (RBSOA)</b>                                                             | $V_{GE} = 15\text{ V}$ , $T_{VJ} = 125^\circ\text{C}$ , $R_G = 10\ \Omega$<br>Clamped inductive load, $L = 30\ \mu\text{H}$ | $I_{CM} = 100$<br>@ $0.8\text{ V}_{CES}$ |           | A                |
| $P_C$                                                                           | $T_C = 25^\circ\text{C}$                                                                                                    | 300                                      | 300       | W                |
| $T_J$                                                                           |                                                                                                                             | -55 ... +150                             |           | $^\circ\text{C}$ |
| $T_{JM}$                                                                        |                                                                                                                             | 150                                      |           | $^\circ\text{C}$ |
| $T_{stg}$                                                                       |                                                                                                                             | -55 ... +150                             |           | $^\circ\text{C}$ |
| $M_d$                                                                           | Mounting torque (M4)                                                                                                        | 0.9/6                                    | Nm/lb.in. |                  |
| <b>Weight</b>                                                                   |                                                                                                                             | 10                                       | g         |                  |
| Maximum lead temperature for soldering<br>1.6 mm (0.062 in.) from case for 10 s |                                                                                                                             | 300                                      |           | $^\circ\text{C}$ |

TO-264 AA



G = Gate, C = Collector,  
E = Emitter, TAB = Collector

## Features

- International standard package JEDEC TO-264 AA
- High frequency IGBT and anti-parallel FRED in one package
- 2nd generation HDMOS™ process
- Low  $V_{CE(sat)}$ 
  - for minimum on-state conduction losses
- MOS Gate turn-on
  - drive simplicity
- Fast Recovery Epitaxial Diode (FRED)
  - soft recovery with low  $I_{RM}$

## Applications

- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switch-mode and resonant-mode power supplies


## Advantages

- Space savings (two devices in one package)
- Easy to mount with 1 screw (isolated mounting screw hole)
- Reduces assembly time and cost
- High power density

| Symbol        | Test Conditions                                       | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |            |                            |
|---------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|------------|----------------------------|
|               |                                                       | min.                                                                              | typ.       | max.                       |
| $BV_{CES}$    | $I_C = 500\ \mu\text{A}$ , $V_{GE} = 0\text{ V}$      | 50N50<br>50N60                                                                    | 500<br>600 | V                          |
| $V_{GE(th)}$  | $I_C = 500\ \mu\text{A}$ , $V_{CE} = V_{GE}$          | 2.5                                                                               |            | 5.5 V                      |
| $I_{CES}$     | $V_{CE} = 0.8 \cdot V_{CES}$<br>$V_{GE} = 0\text{ V}$ | $T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$                             |            | 250 $\mu\text{A}$<br>15 mA |
| $I_{GES}$     | $V_{CE} = 0\text{ V}$ , $V_{GE} = \pm 20\text{ V}$    |                                                                                   |            | $\pm 100\text{ nA}$        |
| $V_{CE(sat)}$ | $I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$              | 50N50BU1<br>50N60BU1                                                              |            | 2.3 V<br>2.5 V             |

| Symbol                    | Test Conditions                                                                                                                                                                                                                                                                                                                                                      | Characteristic Values<br>(T <sub>J</sub> = 25°C, unless otherwise specified) |      |          |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------|----------|
|                           |                                                                                                                                                                                                                                                                                                                                                                      | min.                                                                         | typ. | max.     |
| <b>g<sub>fs</sub></b>     | I <sub>C</sub> = I <sub>C90</sub> , V <sub>CE</sub> = 10 V,<br>Pulse test, t ≤ 300 μs, duty cycle ≤ 2 %<br>Remarks: Add capacitance from<br>IXGH50N60B (DS95585B)                                                                                                                                                                                                    | 25                                                                           | 35   | S        |
| <b>Q<sub>g</sub></b>      | I <sub>C</sub> = I <sub>C90</sub> , V <sub>GE</sub> = 15 V, V <sub>CE</sub> = 0.5 V <sub>CES</sub>                                                                                                                                                                                                                                                                   |                                                                              | 200  | nC       |
| <b>Q<sub>ge</sub></b>     |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 50   | nC       |
| <b>Q<sub>gc</sub></b>     |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 70   | nC       |
| <b>t<sub>d(on)</sub></b>  | <b>Inductive load, T<sub>J</sub> = 25°C</b><br>I <sub>C</sub> = I <sub>C90</sub> , V <sub>GE</sub> = 15 V, L = 100 μH,<br>V <sub>CE</sub> = 0.8 V <sub>CES</sub> , R <sub>G</sub> = R <sub>off</sub> = 2.7 Ω<br>Remarks: Switching times may increase<br>for V <sub>CE</sub> (Clamp) > 0.8 • V <sub>CES</sub> , higher T <sub>J</sub> or<br>increased R <sub>G</sub> |                                                                              | 50   | ns       |
| <b>t<sub>ri</sub></b>     |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 50   | ns       |
| <b>t<sub>d(off)</sub></b> |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 110  | ns       |
| <b>t<sub>fi</sub></b>     |                                                                                                                                                                                                                                                                                                                                                                      | 50N50                                                                        | 80   | 150 ns   |
| <b>E<sub>off</sub></b>    |                                                                                                                                                                                                                                                                                                                                                                      | 50N60                                                                        | 150  | ns       |
|                           |                                                                                                                                                                                                                                                                                                                                                                      | 50N50                                                                        | 1.8  | mJ       |
|                           |                                                                                                                                                                                                                                                                                                                                                                      | 50N60                                                                        | 3.0  | mJ       |
| <b>t<sub>d(on)</sub></b>  | <b>Inductive load, T<sub>J</sub> = 125°C</b><br>I <sub>C</sub> = I <sub>C90</sub> , V <sub>GE</sub> = 15 V, L = 100 μH<br>V <sub>CE</sub> = 0.8 V <sub>CES</sub> , R <sub>G</sub> = R <sub>off</sub> = 2.7 Ω<br>Remarks: Switching times may increase<br>for V <sub>CE</sub> (Clamp) > 0.8 • V <sub>CES</sub> , higher T <sub>J</sub> or<br>increased R <sub>G</sub> |                                                                              | 50   | ns       |
| <b>t<sub>ri</sub></b>     |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 60   | ns       |
| <b>E<sub>on</sub></b>     |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 3    | mJ       |
| <b>t<sub>d(off)</sub></b> |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 200  | ns       |
| <b>t<sub>fi</sub></b>     |                                                                                                                                                                                                                                                                                                                                                                      | 50N50                                                                        | 100  | ns       |
|                           |                                                                                                                                                                                                                                                                                                                                                                      | 50N60                                                                        | 250  |          |
| <b>E<sub>off</sub></b>    |                                                                                                                                                                                                                                                                                                                                                                      | 50N50                                                                        | 2.6  | mJ       |
|                           |                                                                                                                                                                                                                                                                                                                                                                      | 50N60                                                                        | 4.2  | mJ       |
| <b>R<sub>thJC</sub></b>   |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              |      | 0.42 K/W |
| <b>R<sub>thCK</sub></b>   |                                                                                                                                                                                                                                                                                                                                                                      |                                                                              | 0.15 | K/W      |

## TO-264 AA Outline



| Dim. | Millimeter |       | Inches |       |
|------|------------|-------|--------|-------|
|      | Min.       | Max.  | Min.   | Max.  |
| A    | 4.82       | 5.13  | .190   | .202  |
| A1   | 2.54       | 2.89  | .100   | .114  |
| A2   | 2.00       | 2.10  | .079   | .083  |
| b    | 1.12       | 1.42  | .044   | .056  |
| b1   | 2.39       | 2.69  | .094   | .106  |
| b2   | 2.90       | 3.09  | .114   | .122  |
| c    | 0.53       | 0.83  | .021   | .033  |
| D    | 25.91      | 26.16 | 1.020  | 1.030 |
| E    | 19.81      | 19.96 | .780   | .786  |
| e    | 5.46       | BSC   | .215   | BSC   |
| J    | 0.00       | 0.25  | .000   | .010  |
| K    | 0.00       | 0.25  | .000   | .010  |
| L    | 20.32      | 20.83 | .800   | .820  |
| L1   | 2.29       | 2.59  | .090   | .102  |
| P    | 3.17       | 3.66  | .125   | .144  |
| Q    | 6.07       | 6.27  | .239   | .247  |
| Q1   | 8.38       | 8.69  | .330   | .342  |
| R    | 3.81       | 4.32  | .150   | .170  |
| R1   | 1.78       | 2.29  | .070   | .090  |
| S    | 6.04       | 6.30  | .238   | .248  |
| T    | 1.57       | 1.83  | .062   | .072  |

| Symbol                  | Test Conditions                                                                                                                                                                                      | Characteristic Values<br>(T <sub>J</sub> = 25°C, unless otherwise specified) |      |          |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------|----------|
|                         |                                                                                                                                                                                                      | min.                                                                         | typ. | max.     |
| <b>V<sub>F</sub></b>    | I <sub>F</sub> = I <sub>C90</sub> , V <sub>GE</sub> = 0 V,<br>Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %                                                                                             |                                                                              |      | 1.7 V    |
| <b>I<sub>RM</sub></b>   | I <sub>F</sub> = I <sub>C90</sub> , V <sub>GE</sub> = 0 V, -di <sub>F</sub> /dt = 480 A/μs<br>V <sub>R</sub> = 360 V<br>I <sub>F</sub> = 1 A; -di <sub>F</sub> /dt = 200 A/μs; V <sub>R</sub> = 30 V |                                                                              | 19   | 33 A     |
| <b>t<sub>rr</sub></b>   |                                                                                                                                                                                                      |                                                                              | 175  | ns       |
|                         |                                                                                                                                                                                                      |                                                                              | 35   | 50 ns    |
| <b>R<sub>thJC</sub></b> |                                                                                                                                                                                                      |                                                                              |      | 0.75 K/W |

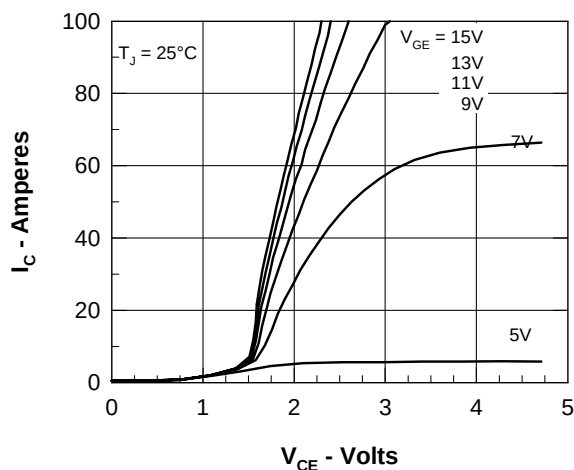


Figure 1. Saturation Voltage Characteristics

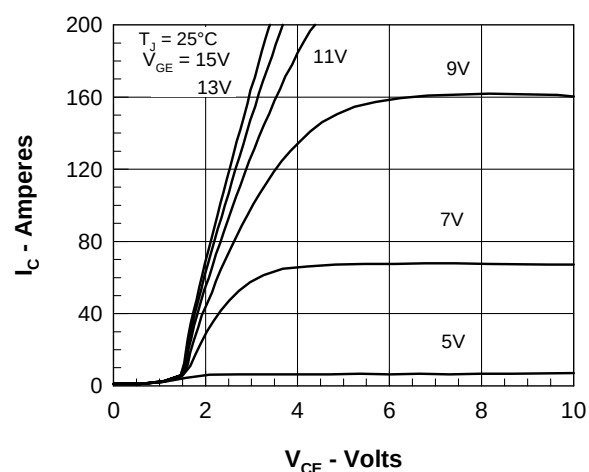


Figure 2. Extended Output Characteristics

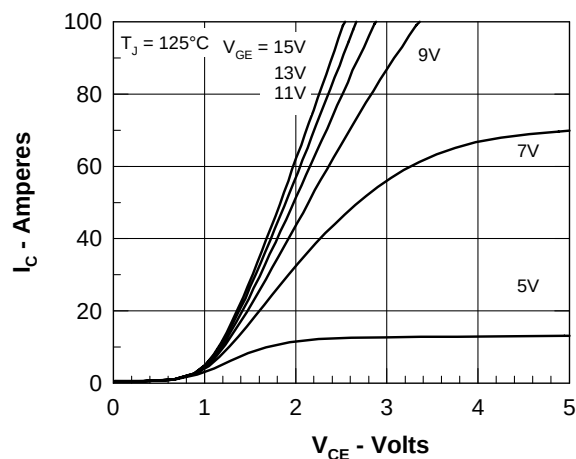


Figure 3. Saturation Voltage Characteristics

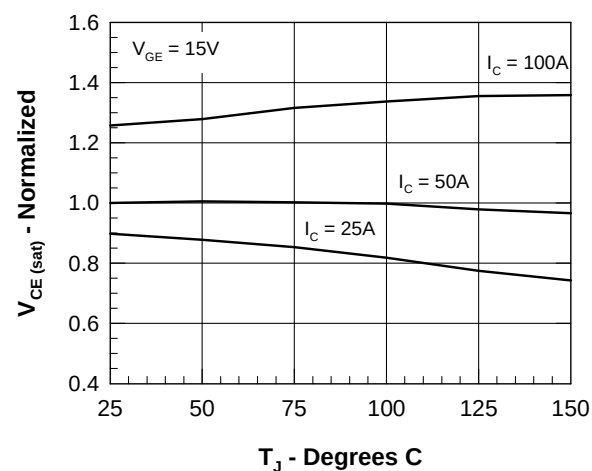
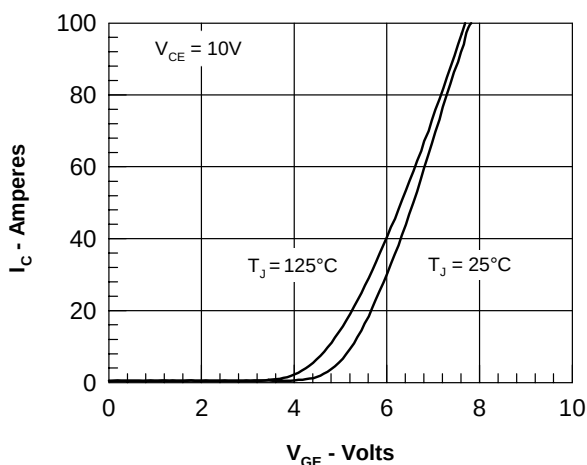

Figure 4. Temperature Dependence of  $V_{CE(sat)}$ 


Figure 5. Admittance Curves

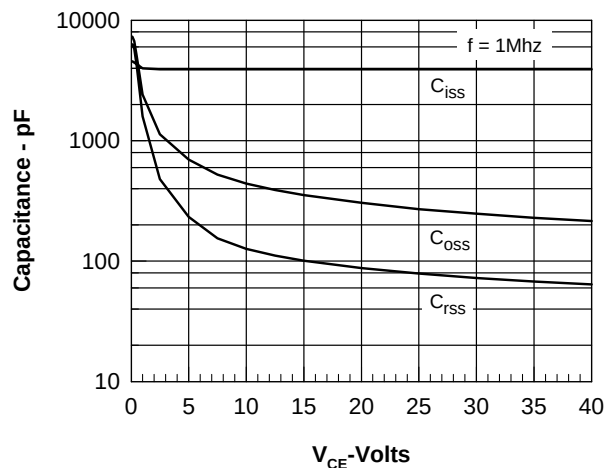


Figure 6. Capacitance Curves

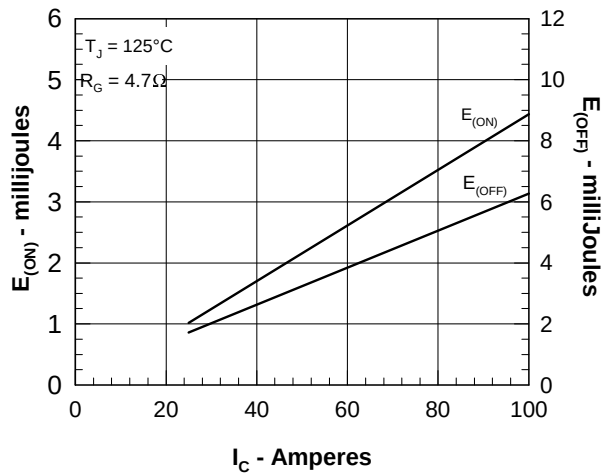


Figure 7. Dependence of  $E_{ON}$  and  $E_{OFF}$  on  $I_C$ .

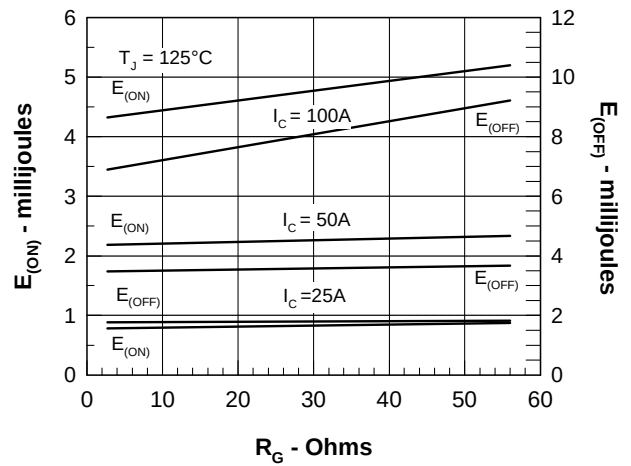


Figure 8. Dependence of  $E_{ON}$  and  $E_{OFF}$  on  $R_G$ .

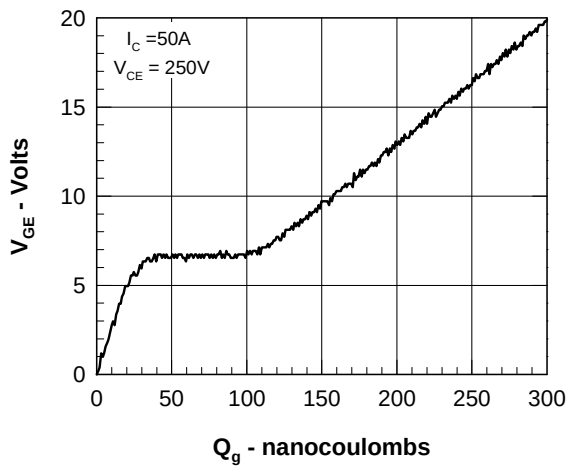


Figure 9. Gate Charge

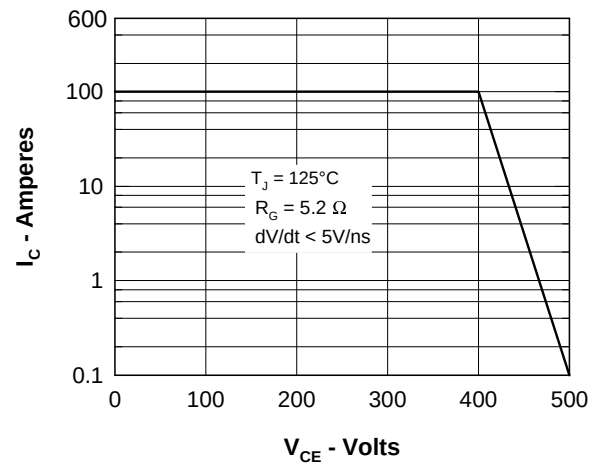


Figure 10. Turn-off Safe Operating Area

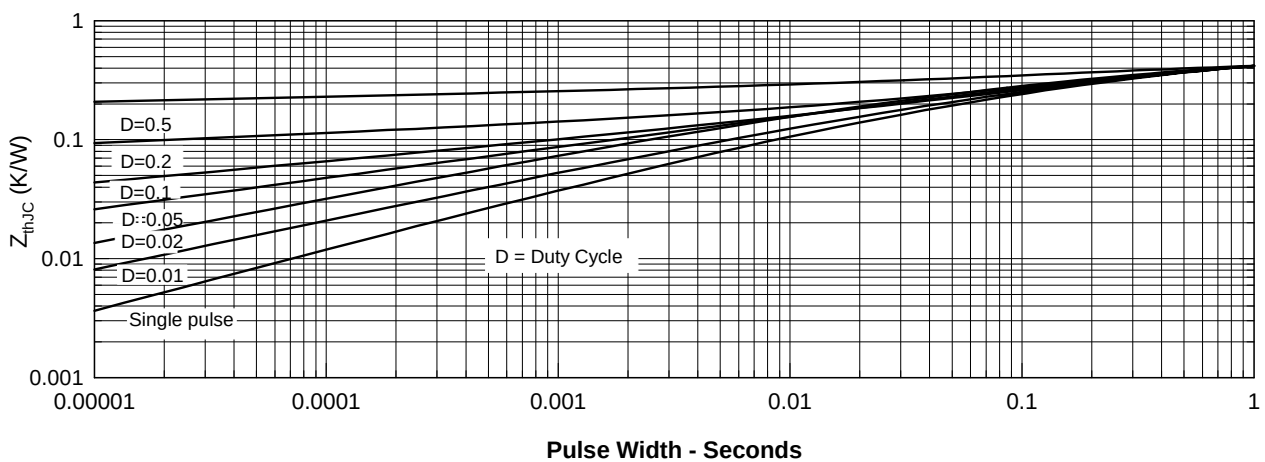


Figure 11. IGBT Transient Thermal Resistance

Fig. 12. Maximum Forward Voltage Drop

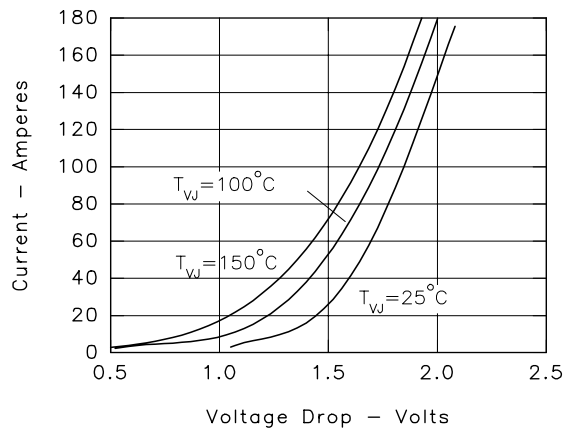
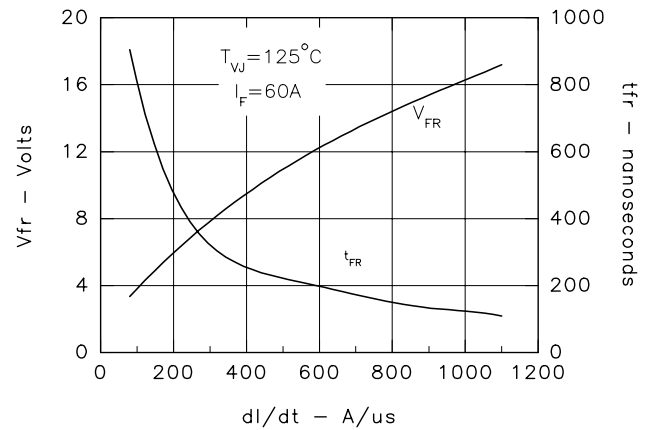
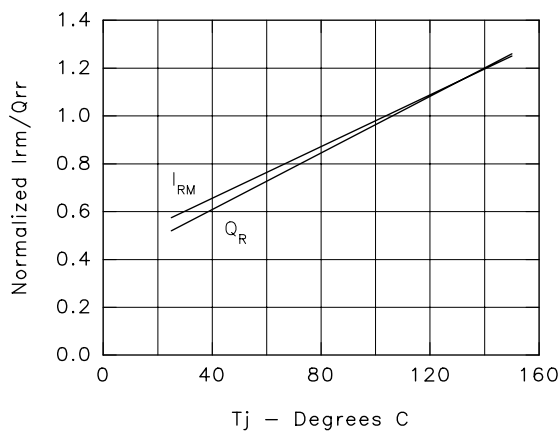
Fig. 13. Peak Forward Voltage  $V_{FR}$  and Forward Recovery Time  $t_{FR}$ Fig. 14. Junction Temperature Dependence of  $I_{RM}$  and  $Q_R$ 

Fig. 15. Maximum Reverse Recovery Charge

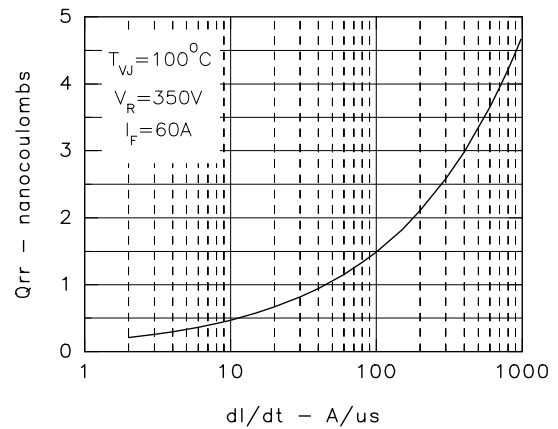


Figure 16. Peak Reverse Recovery Current.

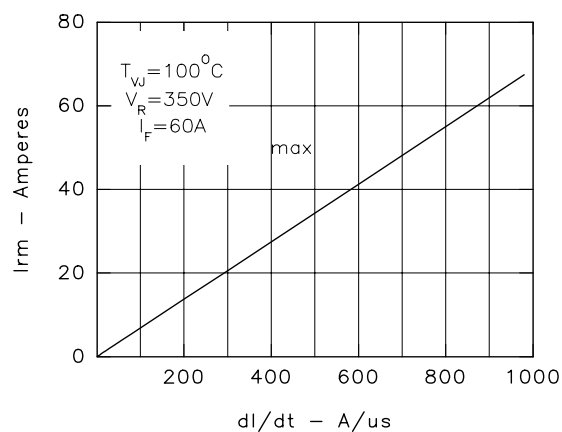
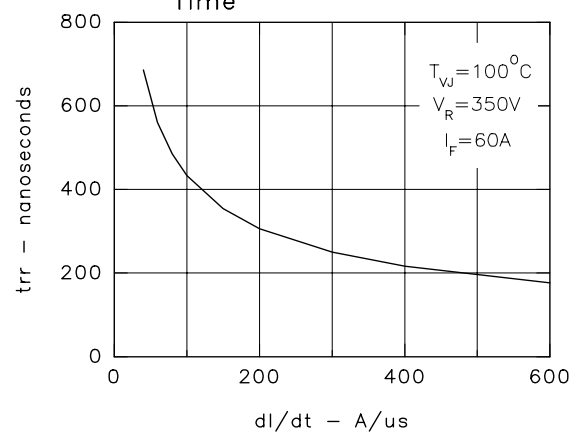


Fig. 17. Maximum Reverse Recovery Time



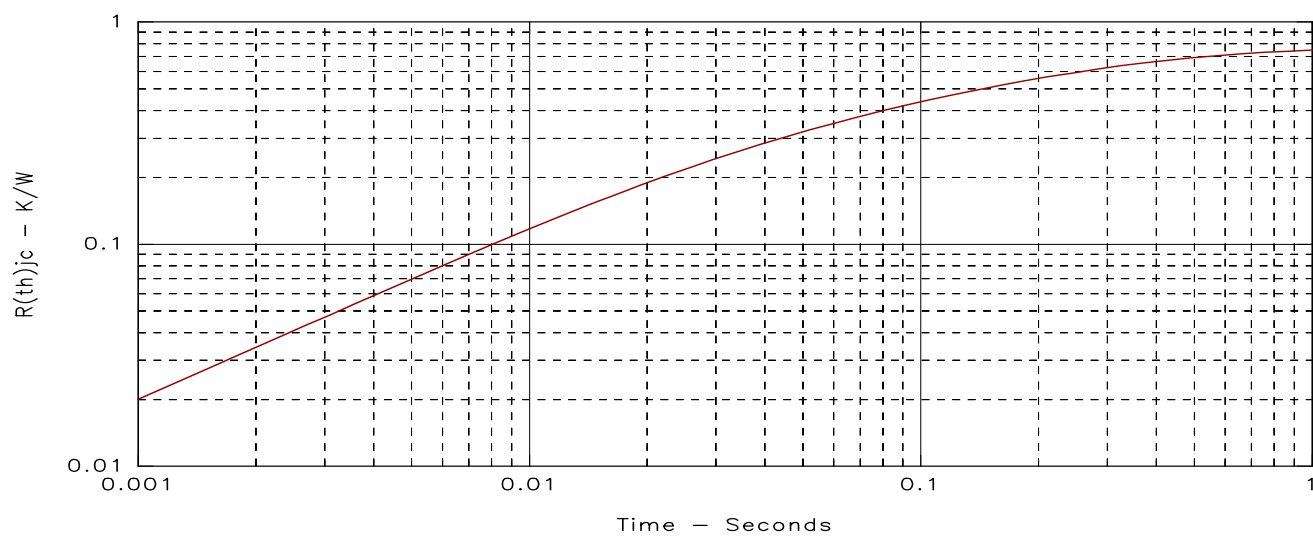


Fig. 18. Diode transient thermal resistance junction-to-case.