



Single Phase Rectifier Bridge

$$I_{dAV} = 122 \text{ A}$$

$$V_{RRM} = 800-1800 \text{ V}$$

V_{RSM} V	V_{RRM} V	Type
800	800	VBO 130-08NO7
1200	1200	VBO 130-12NO7
1400	1400	VBO 130-14NO7
1600	1600	VBO 130-16NO7
1800	1800	VBO 130-18NO7



Symbol	Test Conditions		Maximum Ratings	
I _{dAV}	T _C = 100°C, module		122	A
I _{dAV}	T _A = 35°C (R _{thCA} = 0.2 K/W), module		115	A
I _{FSM}	T _{VJ} = 45°C;	t = 10 ms (50 Hz), sine	1800	A
	V _R = 0	t = 8.3 ms (60 Hz), sine	1950	A
	T _{VJ} = T _{VJM}	t = 10 ms (50 Hz), sine	1600	A
	V _R = 0	t = 8.3 ms (60 Hz), sine	1800	A
I ² t	T _{VJ} = 45°C	t = 10 ms (50 Hz), sine	16 200	A ² s
	V _R = 0	t = 8.3 ms (60 Hz), sine	16 200	A ² s
	T _{VJ} = T _{VJM}	t = 10 ms (50 Hz), sine	12 800	A ² s
	V _R = 0	t = 8.3 ms (60 Hz), sine	13 400	A ² s
T _{VJ}			-40...+150	°C
T _{VJM}			150	°C
T _{stg}			-40...+125	°C
V _{ISOL}	50/60 Hz, RMS	t = 1 min	2500	V~
	I _{ISOL} ≤ 1 mA	t = 1 s	3000	V~
M _d	Mounting torque (M6)		5 ± 15 %	Nm
	Terminal connection torque (M6)		5 ± 15 %	Nm
Weight	typ.		270	g

Features

- Package with screw terminals
- Isolation voltage 3000 V~
- Planar passivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop
- UL applied

Applications


- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling

Symbol	Test Conditions		Characteristic Values		
I_R	$V_R = V_{RRM1}$;	$T_{VJ} = 25^{\circ}\text{C}$	$\leq$	0.3	mA
	$V_R = V_{RRM2}$;	$T_{VJ} = T_{VJM}$	$\leq$	5	mA
V_F	$I_F = 300\text{ A}$;	$T_{VJ} = 25^{\circ}\text{C}$	$\leq$	1.65	V
V_{T0}	For power-loss calculations only			0.8	V
r_T	$T_{VJ} = T_{VJM}$			3	mΩ
R_{thJC}	per diode, 180°			0.65	K/W
	per module			0.108	K/W
R_{thJK}	per diode; 180°			0.83	K/W
	per module			0.138	K/W
d_S	Creeping distance on surface			10	mm
d_A	Creepage distance in air			9.4	mm
a	Max. allowable acceleration			50	m/s ²

Dimensions in mm (1 mm = 0.0394")

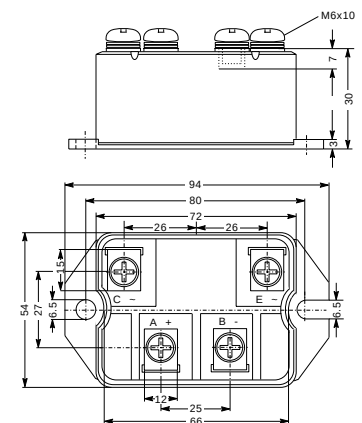

Data according to IEC 60747 refer to a single diode unless otherwise stated
IXYS reserves the right to change limits, test conditions and dimensions.