
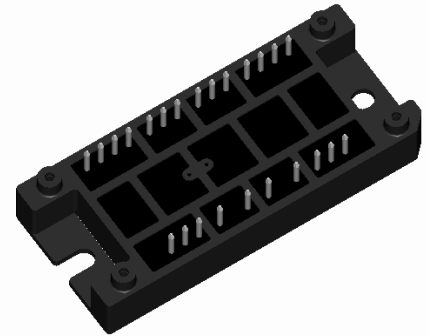


Three phase full bridge with Trench MOSFETs

$$\begin{aligned} V_{DSS} &= 75 \text{ V} \\ R_{DSon} &= 2.3 \text{ m}\Omega \\ I_{D25} &= 340 \text{ A} \end{aligned}$$

Preliminary data

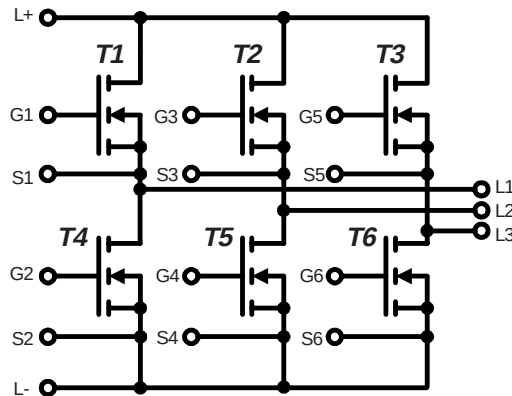

MOSFETs T1 - T6

Symbol	Conditions	Maximum Ratings	
V_{DSS}	$T_{VJ} = 25^{\circ}\text{C to } 150^{\circ}\text{C}$	75	V
V_{GS}		± 20	V
I_{D25}	$T_C = 25^{\circ}\text{C}$	340	A
I_{D80}	$T_C = 80^{\circ}\text{C}$	250	A
I_{D25}	$T_C = 25^{\circ}\text{C (diode)}$	340	A
I_{D80}	$T_C = 80^{\circ}\text{C (diode)}$	250	A

Applications

AC drives

- in automobiles
 - electric power steering
 - starter generator
 - etc...
- in industrial vehicles
 - propulsion drives
 - fork lift drives
- in battery supplied equipment

Symbol	Conditions	Characteristic Values ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified)		
		min.	typ.	max.
R_{DSon}	$V_{GS} = 10 \text{ V}; I_D = I_{D80}$		2.3	3.3 m Ω
V_{GSth}	$V_{DS} = 20 \text{ V}; I_D = 2 \text{ mA}$	2		4 V
I_{DSS}	$V_{DS} = 75 \text{ V}; V_{GS} = 0 \text{ V}; T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		0.25	0.02 mA mA
I_{GSS}	$V_{GS} = \pm 20 \text{ V}; V_{DS} = 0 \text{ V}$			0.2 μA
Q_g Q_{gs} Q_{gd}	$V_{GS} = 10 \text{ V}; V_{DS} = 0.5 \cdot V_{DSS}; I_D = 175 \text{ A}$		450 60 170	nC nC nC
$t_{d(on)}$ t_r $t_{d(off)}$ t_f			60 170 320 200	ns ns ns ns
V_F	(diode) $I_F = 175 \text{ A}; V_{GS} = 0 \text{ V}$		1.1	1.6 V
t_{rr}	(diode) $I_F = 40 \text{ A}; -di/dt = 200 \text{ A}/\mu\text{s}; V_{DS} = 30 \text{ V}$		90	ns
R_{thJC} R_{thJH}	with heat transfer paste		0.51	0.26 K/W K/W


Ratings and characteristic values are per individual MOSFET

IXYS reserves the right to change limits, test conditions and dimensions.

Module				
Symbol	Conditions	Maximum Ratings		
T_{VJ}		-40...+175	°C	
T_{stg}		-40...+125	°C	
V_{ISOL}	$I_{ISOL} \leq 1 \text{ mA}$; 50/60 Hz; $t = 1 \text{ min}$	500	V~	
M_d	Mounting torque (M5)	2 - 2.5	Nm	
Symbol	Conditions	Characteristic Values		
		$(T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
Weight	typ.		80	g

Equivalent Circuits for Simulation

Thermal Response

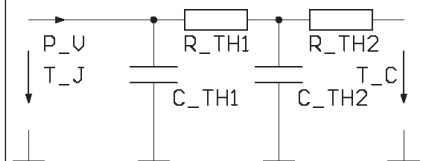


junction - case (typ.)

$$C_{th1} = 0.13 \text{ J/K}; R_{th1} = 0.08 \text{ K/W}$$

$$C_{th2} = 0.22 \text{ J/K}; R_{th2} = 0.18 \text{ K/W}$$

Dimensions in mm (1 mm = 0.0394")

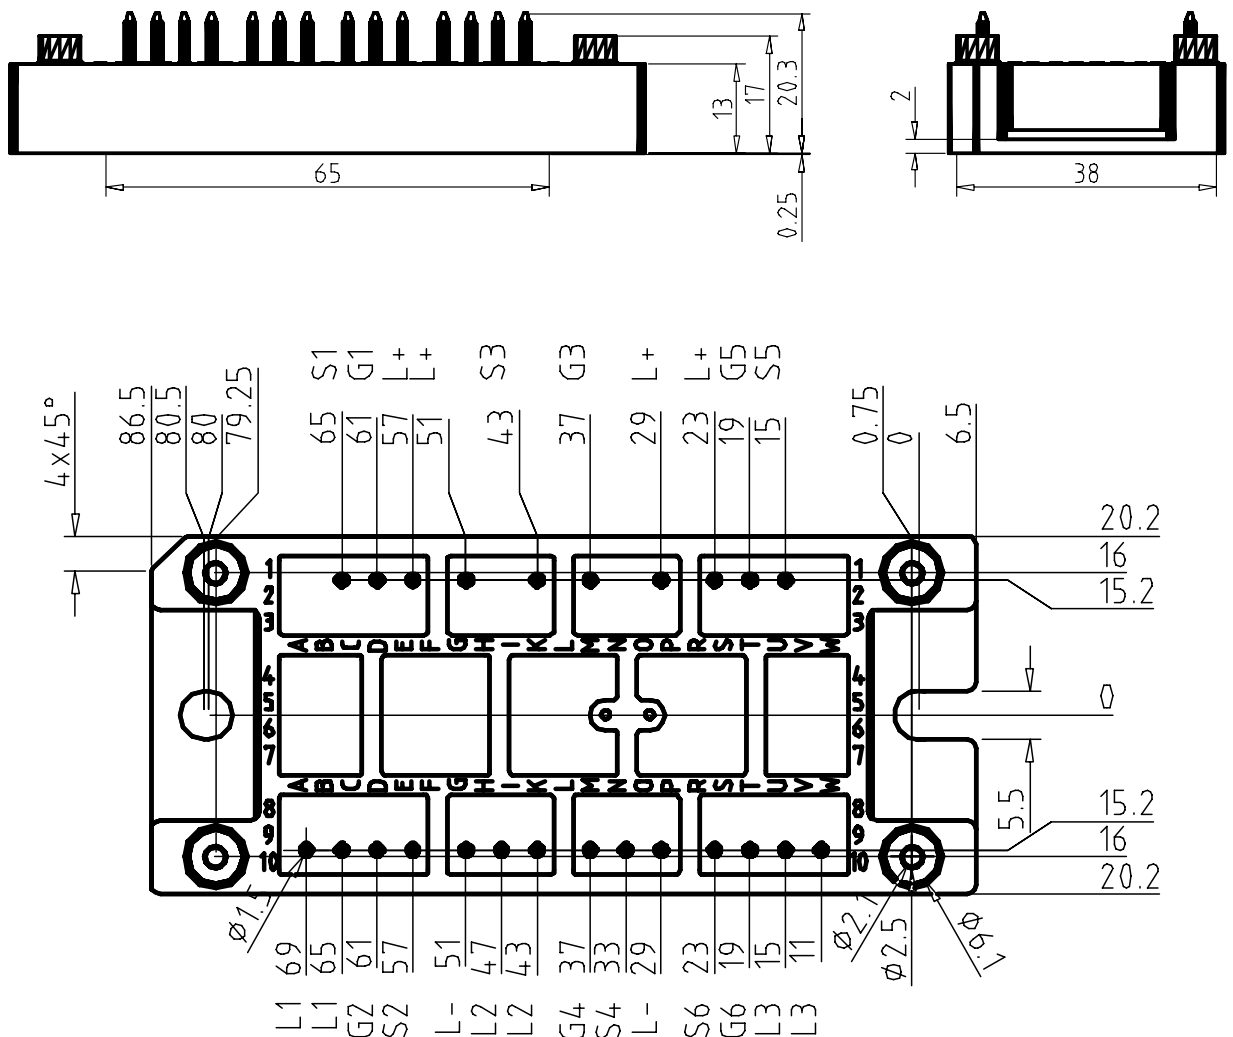

IXYS reserves the right to change limits, test conditions and dimensions.

© 2003 IXYS All rights reserved

IXYS Semiconductor GmbH
Edisonstr. 15, D-68623 Lampertheim
Phone: +49-6206-503-0, Fax: +49-6206-503627

IXYS Corporation
3540 Bassett Street, Santa Clara CA 95054
Phone: (408) 982-0700, Fax: 408-496-0670