


pin-locator
1882-24008
attached





Operating instructions

- Please remove support while using pin-locator
- Pin locator must be tight screwed on wire-anvil
- Please mount support while using socket-locator
- Adjust fixing of socket-locator to assure its gliding functionality

Ausführung: Workmanship:

- Leichte Handhabung
Easy handling
- Linearer Hub
Straight action principle
- Entriegelbare Zwangssperre
Ratchet release
- Kontaktpositionierung mit Klapppositionierer
Contact positioning with flap locator
- Präzise geschliffene Profile
Precisely ground profiles
- Oberfläche brüniert
Burnished surface
- Ergonomisch geformte Soft-Handgriffe
Farbe: Türkisgrün (ähnlt. RAL 6016)
Ergonomically formed soft-grips
Colour: green similar (similar RAL 6016)
- Voll recyclefähig;
RoHS(Richtlinie.2002/95/EG) konform
Fully recyclable;
RoHS(Directive.2002/95/EG) compliant

support

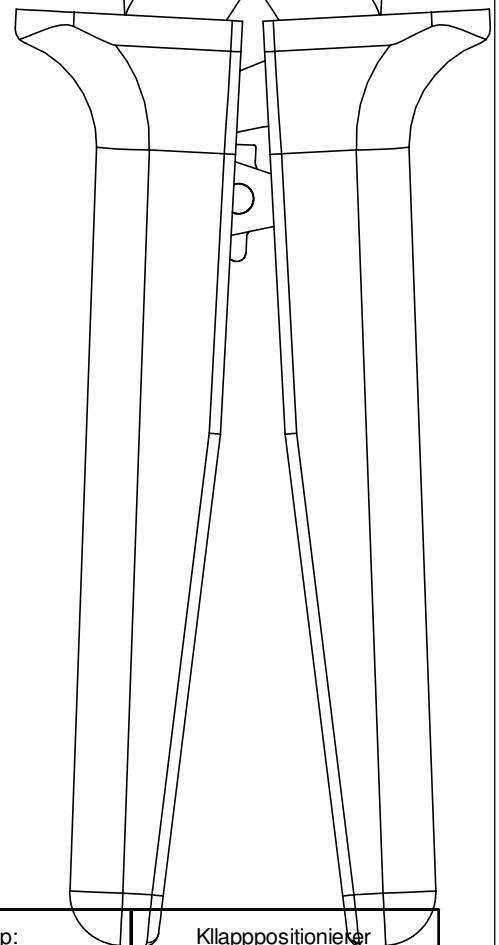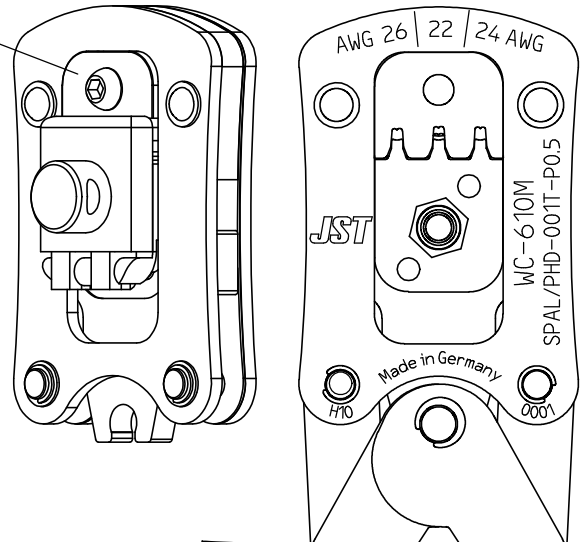

Abmessungen: Dimensions:

- Länge: ca. 195 mm
Length: approx. 195 mm
- Breite: ca. 63 mm
Width: approx. 63 mm
- Gewicht: ca. 290 g
Weight: approx. 290 g

Bedienhinweis auf Rückseite
Operating instructions see overleaf

Anwendungsbereich: Application range:

Leiterquerschnitt Cross section range	Crimphöhe Leiter Crimp height wire ±0,05	Crimpbreite Leiter Crimp width wire Ref	Kontakt-Typ: Contact Type:	Klapppositionierer flap locator
AWG 26	0,65	1,38	SPHD-001T-P0.5 Buchse/Socket SPAL-001T-P0.5 Stift/Pin	1182-24005 Buchse/Socket
AWG 22	0,75			1182-24008 Stift/Pin
AWG 24	0,7			