


Capacitor, ceramic, 0.1 uF, 10% Tol, 100V, X7R, Lead Spacing=0.2"

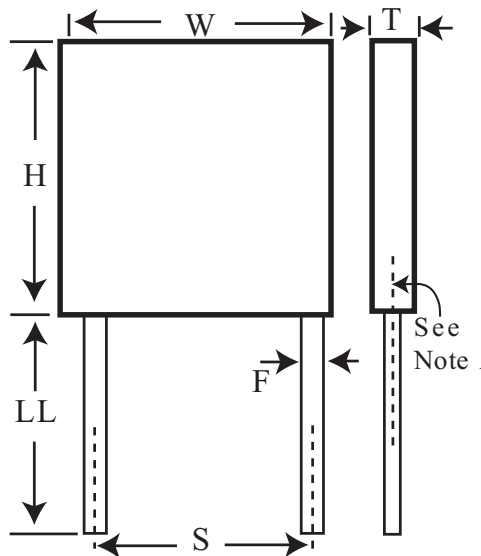

## Dimensions (in)

## Specifications

| ID | Dimension | Tolerance | Capacitance:             | 0.1 uF         |
|----|-----------|-----------|--------------------------|----------------|
| H  | 0.3       | max       | Tolerance:               | 10%            |
| T  | 0.15      | max       | Voltage:                 | 100V           |
| L  | 0.3       | max       | Temperature Coefficient: | X7R            |
| S  | 0.2       | +/-0.03   | Body Type:               | Molded         |
| LL | 1.25      | min       | Lead Spacing:            | 0.2"           |
| F  | 0.025     | nom       | Lead Form:               | Straight Leads |
|    |           |           | Lead Type:               | Standard Leads |
|    |           |           | Packaging:               | Bulk, Bag      |
|    |           |           | Package Quantity:        | 1              |