


Capacitor, film, 0.047 uF, +/-10% Tol, -55/+105C, Safety: X2, 275VAC, Lead Spacing=15 mm

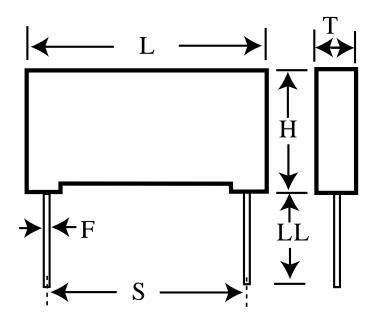

Dimensions (mm)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|-----------|------------------------------|--------------------------------|
| L | 18 | max | Brand: | Rifa |
| Н | 10.5 | max | Capacitance: | 0.047 uF |
| T | 5.5 | max | Temperature Range: | -55/+105C |
| S | 15 | +/-0.4 | Rated Temperature: | 105C |
| LL | 17 | nom | Voltage @ rated temp: | 760V |
| F | 0.8 | nom | Voltage AC: | 275VAC |
| | | | Tolerance: | +/-10% |
| | | | Body Type: | Radial Box |
| | | | Construction: | Wound |
| | | | Application: | Safety: X2 |
| | | | Dissipation Factor @ 1 kHz: | 0.1% |
| | | | Dissipation Factor @ 10 kHz: | 0.2% |
| | | | Dissipation Factor @ 100kHz: | 0.6% |
| | | | Insulation Resistance: | 30 GOhm |
| | | | Maximum dVdT: | 100v/us |
| | | | UL_1414: | 250V |
| | | | UL_1283: | 280V |
| | | | IEC_60384-14: | 275V |
| | | | EN_132400: | 275V |
| | | | C_22.2_NO.1: | 250V |
| | | | C_22.2_NO.8: | 280V |
| | | | Miscellaneous Electrical: | UL/CSA VAC= 280; fo= &DD2&"MHz |
| | | | | series(PHE840M) |
| | | | Package Kind: | Bulk |
| | | | Package Quantity: | 800 |

