


Capacitor, film, 0.47 uF, +/-10% Tol, -55/+105C, Safety: X2, 275VAC, Lead Spacing=22.5 mm

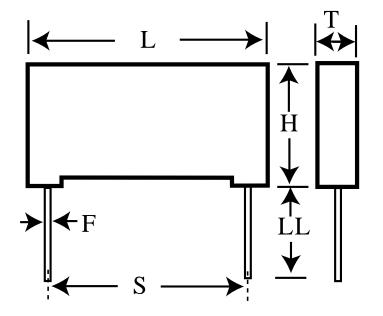

## **Dimensions (mm)**

ID	Dimension	Tolerance	Manufac
U		TOIETAILCE	
L	26	max	Brand:
н	18.5	max	Capacita
т	9	max	Tempera
S	22.5	+/-0.4	Rated Te
LL	6	nom	Voltage (
F	0.8	nom	Voltage /

## **Specifications**

Manufacturer:	KEMET	
Brand:	Rifa	
Capacitance:	0.47 uF	
Temperature Range:	-55/+105C	
Rated Temperature:	105C	
Voltage @ rated temp:	760V	
Voltage AC:	275VAC	
Tolerance:	+/-10%	
Body Type:	Radial Box	
Construction:	Wound	
Application:	Safety: X2	
Dissipation Factor @ 1 kHz:	0.1%	
Dissipation Factor @ 10 kHz:	0.4%	
Insulation Resistance:	21.28 GOhm	
Maximum dVdT:	100v/us	
UL_1414:	250V	
UL_1283:	280V	
IEC_60384-14:	275V	
EN_132400:	275V	
C_22.2_NO.1:	250V	
C_22.2_NO.8:	280V	
Miscellaneous Electrical:	UL/CSA VAC= 280; fo= &DD2&"MH	
	series(PHE840M)	
Package Kind:	Bulk	
Package Type:	Tray	
Package Quantity:	308	
- •		



© 2006-2012 IntelliData.net

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.