


Capacitor, film, 0.33 uF, +/-20% Tol, -55/+105C, Safety: X2, 275VAC, Lead Spacing=15 mm

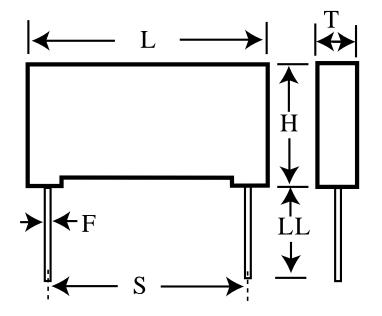

Dimensions (mm)

_				
	ID	Dimension	Tolerance	Manufacturer:
	L	18	max	Brand:
	Н	16	max	Capacitance:
	т	8.5	max	Temperature F
	S	15	+/-0.4	Rated Temper
	LL	17	nom	Voltage @ rate
	F	0.8	nom	Voltage AC:
				-

Specifications

-			
Manufacturer:	KEMET		
Brand:	Rifa		
Capacitance:	0.33 uF		
Temperature Range:	-55/+105C		
Rated Temperature:	105C		
Voltage @ rated temp:	760V		
Voltage AC:	275VAC		
Tolerance:	+/-20%		
Body Type:	Radial Box		
Construction:	Wound		
Application:	Safety: X2		
Dissipation Factor @ 1 kHz:	0.1%		
Dissipation Factor @ 10 kHz:	0.4%		
Insulation Resistance:	30 GOhm		
Maximum dVdT:	100v/us		
UL_1414:	250V		
UL_1283:	280V		
IEC_60384-14:	275V		
EN_132400:	275V		
C_22.2_NO.1:	250V		
C_22.2_NO.8:	280V		
Miscellaneous Electrical:	UL/CSA VAC= 280; fo= &DD2&"MHz		
	series(PHE840M)		
Package Kind:	Bulk		
Package Quantity:	400		



© 2006-2012 IntelliData.net

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.