




MI0603L221R-11

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:


| | | | | |
|---|-------------|--------|-------|--------|
| A | 1.60 [.063] | + 0.15 | -.006 | [.006] |
| B | 0.80 [.031] | + 0.15 | -.006 | [.006] |
| C | 0.80 [.031] | + 0.15 | -.006 | [.006] |
| D | 0.36 [.014] | + 0.15 | -.006 | [.006] |

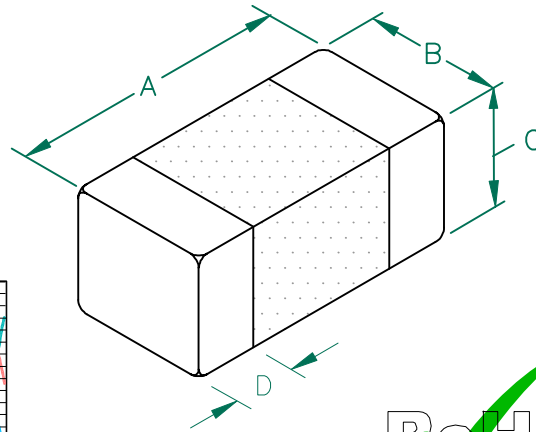


| ELECTRICAL CHARACTERISTICS: | | | |
|-----------------------------|------------|---------------|---------|
| Z @ 100MHz (Ω) | DCR (Ω) | Rated Current | |
| Nominal | 220 | 0.065 | |
| Minimum | 165 | 0.050 | |
| Maximum | 275 | 0.080 | 2000 mA |

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. TERMINATION FINISH IS 100% TIN.


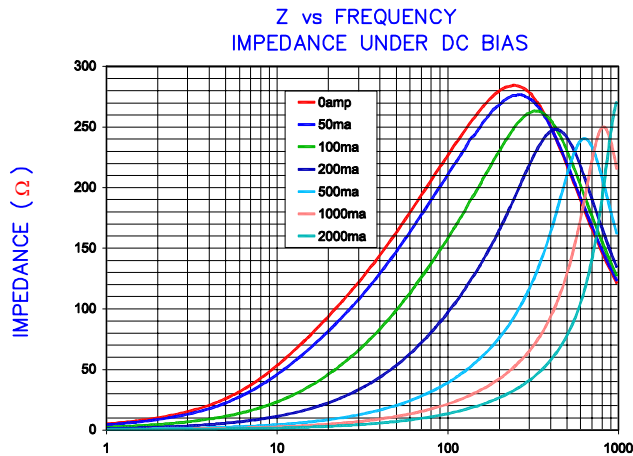


LAND PATTERNS FOR REFLOW SOLDERING

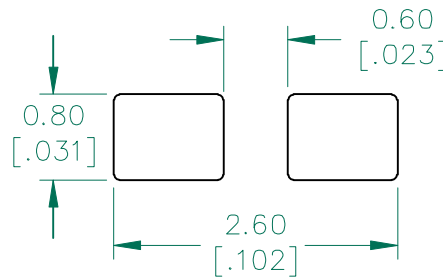

(For wave soldering, add 0.762 [.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

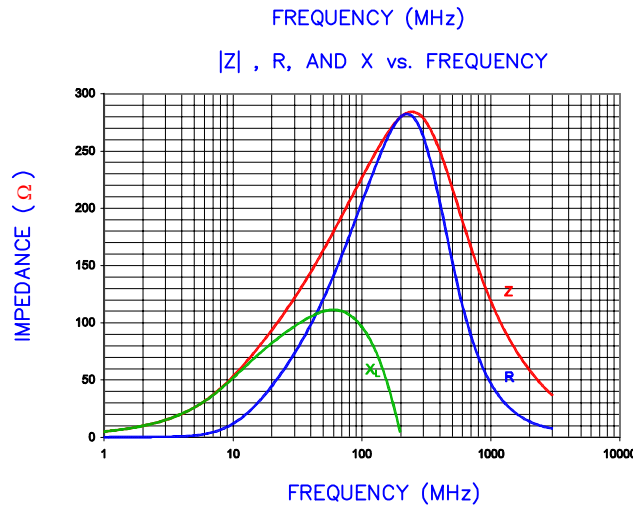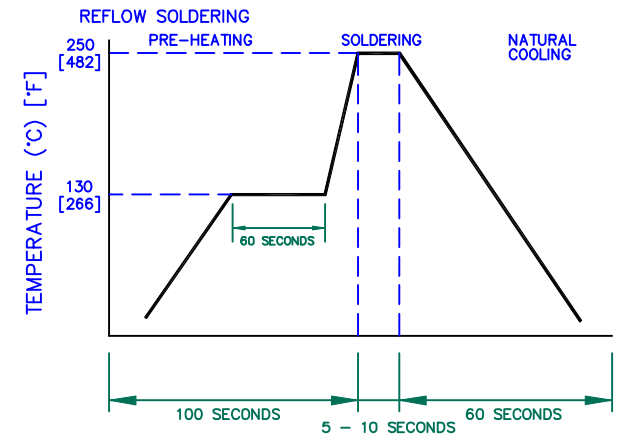

| | | | | | | | |
|--------------------------------|----------------|----------|------------|--|--------|--|--|
| DIMENSIONS ARE IN mm [INCHES]. | | | | THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD. | | | |
| | | | | Steward | | | |
| PROJECT/PART NUMBER: | | REV | PART TYPE: | DRAWN BY: | | | |
| MI0603L221R-11 | | A | CO-FIRE | JRK | | | |
| DATE: | | SCALE: | SHEET: | | | | |
| 08/16/04 | | - | 2 of 2 | | | | |
| REV | DESCRIPTION | DATE | INT | CAD # | TOOL # | | |
| A | ORIGINAL DRAFT | 08/16/04 | JRK | MI0603L221R-11-A | | | |