



**Mallory Sonalert Products, Inc.**

Part #: **SC628D-1R**

## Sales Outline Drawing


Revision: **C**

### Specifications: Not for use in new designs - see P/N SC628D-BTR

|                       |   |
|-----------------------|---|
| Sound Level Category  | Medium  |
| Mode of Operation     | Continuous  |
| Voltage Rating        | 6 to 28 VDC   |
| Frequency             | 2000 $\pm$ 500 Hz   |
| Loudness @ 2 FT       | 67 to 80 dB(A) Typ  |
| Current Draw          | 5-18mA  |
| Housing Material      | 6/6 Nylon, Color: Black   |
| Storage Temperature   | -40° to +50° C  |
| Operating Temperature | -30° to +60° C  |
| Panel Mounting        | Recommended hole size is 1.25"(31.75mm). Thread from front into standard 30mm(1.181") hole. |
| Knurled Nut           | Used to attach part to panel. The max recommended torque is 10 in-lbs.                      |
| Weight (Typical)      | 1.6 oz (45g)  |
| NEMA 3R, 4X, & 12     | Approved with use of MCC03.   |
| Options               | Please consult factory.   |

### Dimensions: Inches (mm)

**ROHS Compliant**

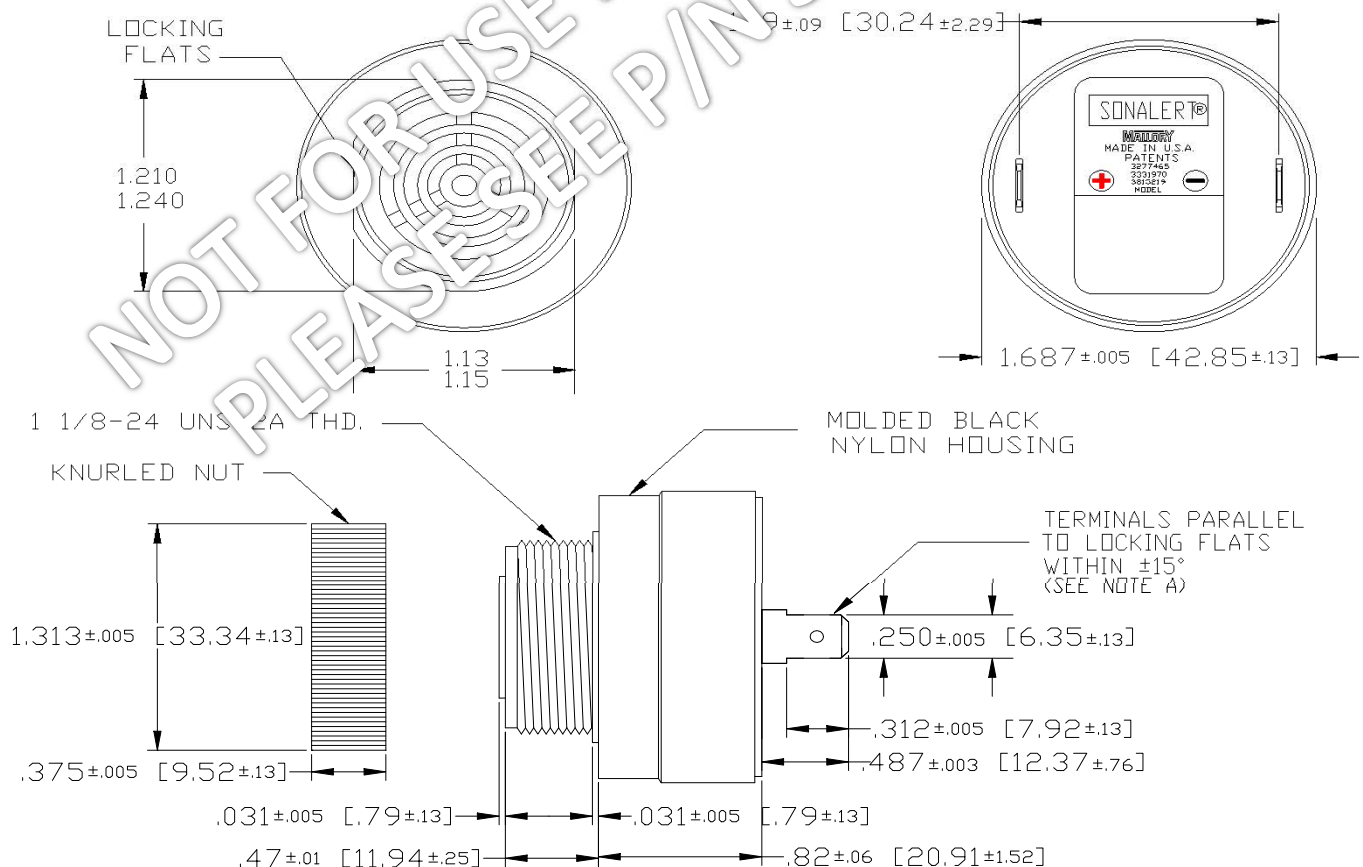

MOUNTING: REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.