
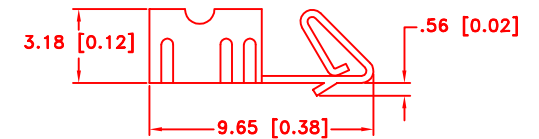
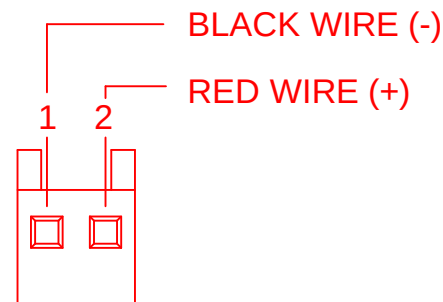


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/28/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

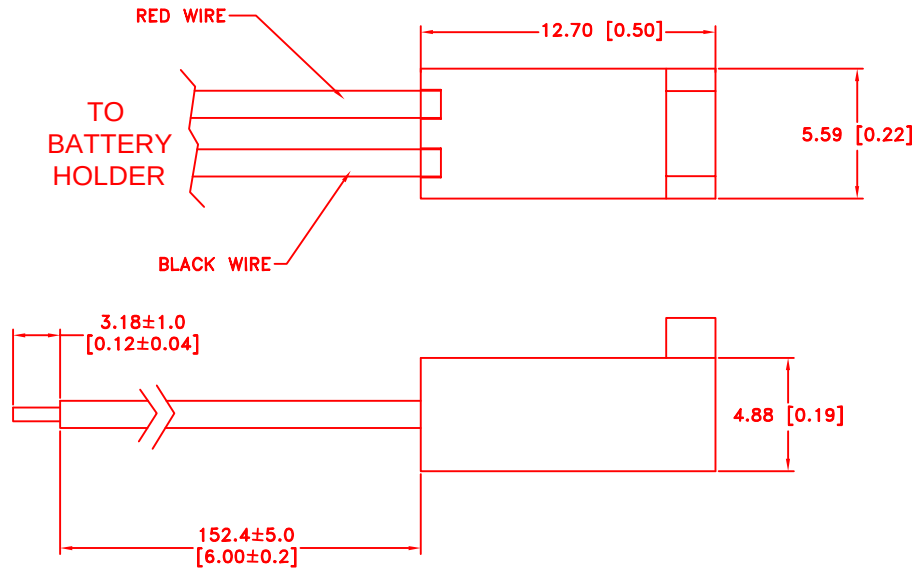

FEMALE CONNECTOR PIN

NOTES:

- HOUSING: RED NYLON, UL94V-0
TEMP.: -40°C TO 75°C
UL FILE NO.: E29179, CSA FILE NO.: LR19980
MATES WITH: 4030, 4380, 4094, 6373, 6410, 7395, 7478, 42152, 42153, 42225, 42226, 42227, 42228, 42375, 42376, 70021, 70327, 70475
- CONTACT: BRASS, TIN PLATING
TEMP.: -40°C TO 75°C
- WIRES : 26 AWG, UL1007, CSA, TR64
- ROHS COMPLIANT

PART NO.	DESCRIPTION			QTY
22-01-3027	MOLEX TYPE CONNECTOR OR EQUIV.			1
08-50-0114	MOLEX TYPE CONNECTOR PINS OR EQUIV. (LOOSE FORM)			2
Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By T.B.	
Fractional ± .8 (.030)	Title 2 POSITION LATCHING CONNECTOR WITH POLARIZING RIB, 2.54mm PIN SPACING			
Angular ± 3°	Date 10/28/06	Drawing Number MPD-411		