

APT2X101D30J 300V 100A
APT2X100D30J 300V 100A

DUAL DIE ISOTOP® PACKAGE

ULTRAFAST SOFT RECOVERY RECTIFIER DIODE

PRODUCT APPLICATIONS

- Anti-Parallel Diode
 - Switchmode Power Supply
 - Inverters
- Free Wheeling Diode
 - Motor Controllers
 - Converters
- Snubber Diode
- Uninterruptible Power Supply (UPS)
- Induction Heating
- High Speed Rectifiers

PRODUCT FEATURES

- Ultrafast Recovery Times
- Soft Recovery Characteristics
- Popular SOT-227 Package
- Low Forward Voltage
- High Blocking Voltage
- Low Leakage Current

PRODUCT BENEFITS

- Low Losses
- Low Noise Switching
- Cooler Operation
- Higher Reliability Systems
- Increased System Power Density

MAXIMUM RATINGS

All Ratings: $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Characteristic / Test Conditions	APT2X100_101D30J	UNIT
V_R	Maximum D.C. Reverse Voltage	300	Volts
V_{RRM}	Maximum Peak Repetitive Reverse Voltage		
V_{RWM}	Maximum Working Peak Reverse Voltage		
$I_F(AV)$	Maximum Average Forward Current ($T_C = 115^\circ\text{C}$, Duty Cycle = 0.5)	100	Amps
$I_F(RMS)$	RMS Forward Current (Square wave, 50% duty)	183	
I_{FSM}	Non-Repetitive Forward Surge Current ($T_J = 45^\circ\text{C}$, 8.3ms)	1000	
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_L	Lead Temperature for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS

Symbol		MIN	TYP	MAX	UNIT
V_F	Forward Voltage	$I_F = 100\text{A}$		1.2	Volts
		$I_F = 200\text{A}$		1.5	
		$I_F = 100\text{A}, T_J = 125^\circ\text{C}$		1.0	
I_{RM}	Maximum Reverse Leakage Current	$V_R = V_R$ Rated		500	μA
		$V_R = V_R$ Rated, $T_J = 125^\circ\text{C}$		1000	
C_T	Junction Capacitance, $V_R = 200\text{V}$		270		pF

DYNAMIC CHARACTERISTICS

APT2X100_101D30J

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
t_{rr}	Reverse Recovery Time	$I_F = 1A$, $di_F/dt = -100A/\mu s$, $V_R = 30V$, $T_J = 25^\circ C$	-	36		ns
t_{rr}	Reverse Recovery Time	$I_F = 100A$, $di_F/dt = -200A/\mu s$ $V_R = 200V$, $T_C = 25^\circ C$	-	47		
Q_{rr}	Reverse Recovery Charge		-	120		nC
I_{RRM}	Maximum Reverse Recovery Current		-	5	-	Amps
t_{rr}	Reverse Recovery Time	$I_F = 100A$, $di_F/dt = -200A/\mu s$ $V_R = 200V$, $T_C = 125^\circ C$	-	110		ns
Q_{rr}	Reverse Recovery Charge		-	650		nC
I_{RRM}	Maximum Reverse Recovery Current		-	10	-	Amps
t_{rr}	Reverse Recovery Time	$I_F = 100A$, $di_F/dt = -1000A/\mu s$ $V_R = 200V$, $T_C = 125^\circ C$	-	70		ns
Q_{rr}	Reverse Recovery Charge		-	1490		nC
I_{RRM}	Maximum Reverse Recovery Current		-	37		Amps

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction-to-Case Thermal Resistance			.42	$^\circ C/W$
$V_{isolation}$	RMS Voltage			20	
W_T	Package Weight		1.03		oz
			29.2		g
Torque	Maximum Terminal & Mounting Torque			10	lb•in
				1.1	N•m

Microsemi Reserves the right to change, without notice, the specifications and information contained herein.

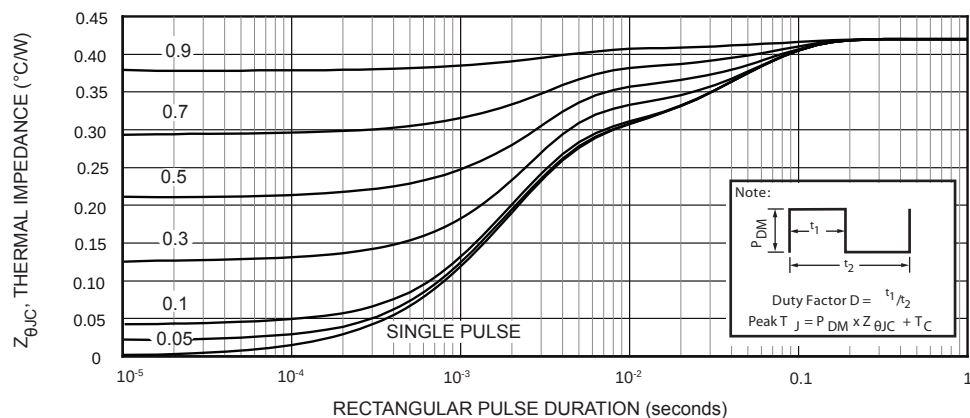


FIGURE 1. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

TYPICAL PERFORMANCE CURVES

APT2X100_101D30J

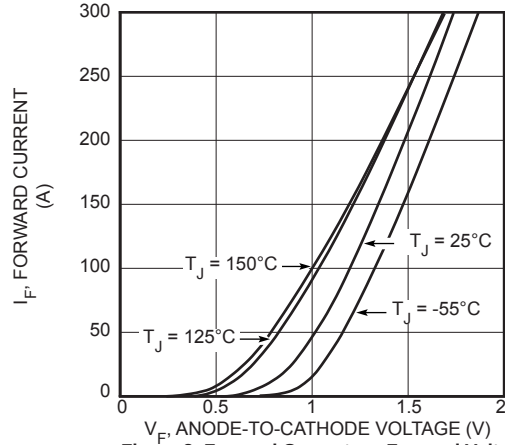


Figure 2. Forward Current vs. Forward Voltage

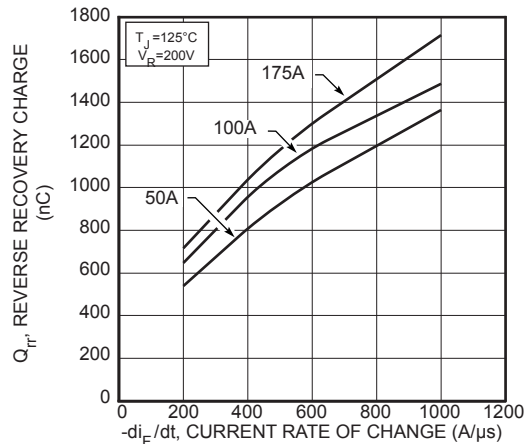


Figure 4. Reverse Recovery Charge vs. Current Rate of Change

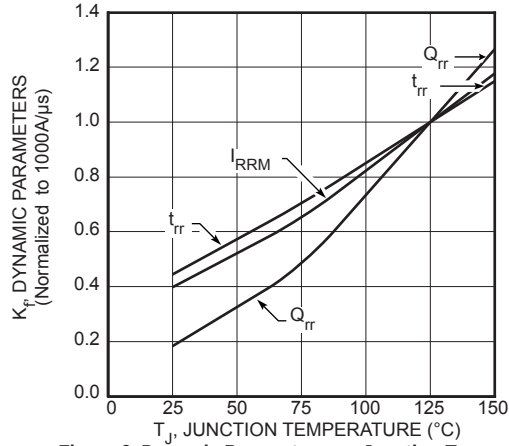


Figure 6. Dynamic Parameters vs. Junction Temperature

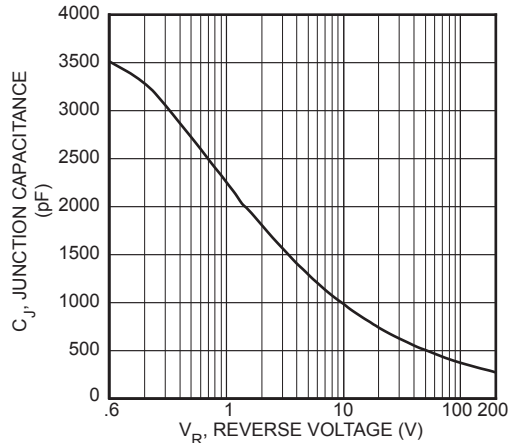


Figure 8. Junction Capacitance vs. Reverse Voltage

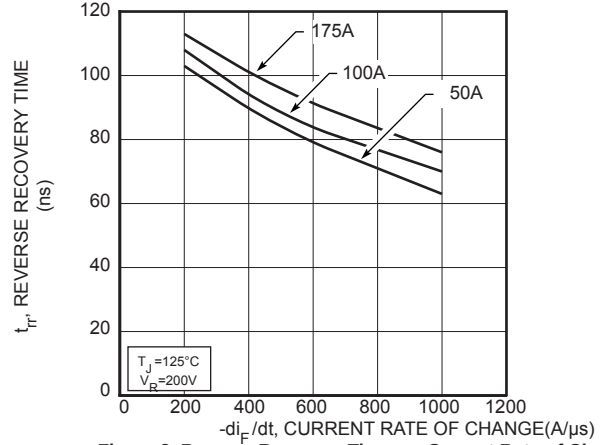


Figure 3. Reverse Recovery Time vs. Current Rate of Change

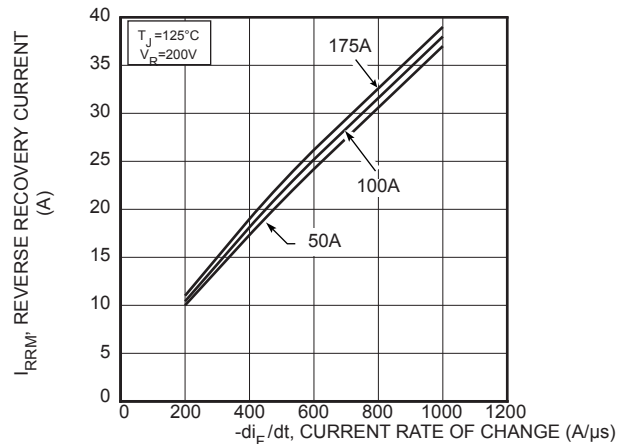


Figure 5. Reverse Recovery Current vs. Current Rate of Change


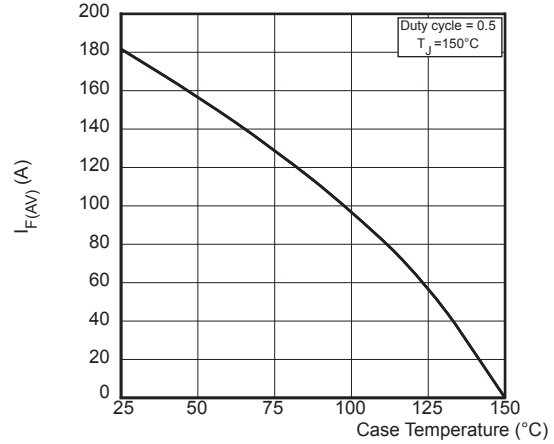


Figure 7. Maximum Average Forward Current vs. Case Temperature



-

Figure 10, Diode Reverse Recovery Waveform and Definitions

Technical drawing of the APT2X100D30J and APT2X101D30J components, showing dimensions in millimeters and inches.

Top View Dimensions:

- Overall width: 31.5 (1.240) / 31.7 (1.248)
- Overall height: 38.0 (1.496) / 38.2 (1.504)
- Distance between top features: 7.8 (.307) / 8.2 (.322)
- Distance between bottom features: 14.9 (.587) / 15.1 (.594)
- Distance between left features: 30.1 (1.185) / 30.3 (1.193)
- Distance between right features: 3.3 (.129) / 3.6 (.143)
- Radius: $r = 4.0 (.157)$ (2 places)
- Feature dimensions: $W = 4.1 (.161)$, $W = 4.3 (.169)$, $H = 4.8 (.187)$, $H = 4.9 (.193)$ (4 places)
- Feature dimensions: 4.0 (.157), 4.2 (.165) (2 places)

Side View Dimensions:

- Overall height: 25.2 (0.992) / 25.4 (1.000)
- Top feature height: 11.8 (.463) / 12.2 (.480)
- Bottom feature height: 8.9 (.350) / 9.6 (.378)
- Feature dimensions: 0.75 (.030), 0.85 (.033)
- Feature dimensions: 12.6 (.496), 12.8 (.504)
- Feature dimensions: 1.95 (.077), 2.14 (.084)
- Feature: Hex Nut M4 H100 (4 places)

Bottom Views:

- Anti-parallel I APT2X100D30J:** Shows Anode 2, Cathode 1, Cathode 2, and Anode 1.
- Paralle I APT2X101D30J:** Shows Cathode 1, Anode 1, Cathode 2, and Anode 2.

Dimensions in Millimeters and (Inches)