

# MPLAD18KP7.0A – MPLAD18KP200CA



## Surface Mount 18,000 Watt Transient Voltage Suppressor

### DESCRIPTION

These high power 18 kW rated transient voltage suppressors in a surface mount package are provided with design features to minimize thermal resistance and cumulative heating. Typical applications include lightning and automotive load dump protection. They are particularly effective at meeting the multi-stroke lightning standard RTCA DO-160, section 22 for aircraft design. This efficient low profile package design is offered in standoff voltage selections ( $V_{WM}$ ) of 7 volts to 200 volts in either unidirectional or bidirectional construction.

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

### FEATURES

- Available in both unidirectional and bidirectional construction (bidirectional with CA suffix)
- High reliability with wafer fabrication and assembly lot traceability
- All parts surge tested
- Low profile surface mount package
- Optional upscreening is available with various screening and conformance inspection options based on MIL-PRF-19500. Refer to [Hirel Non-Hermetic Product Portfolio](#) for more details on the screening options.
- Suppresses transients up to 18,000 W @ 10/1000  $\mu$ s (see [Figure 1](#))
- Moisture classification is Level 1 with no dry pack required per IPC/JEDEC J-STD-020B
- RoHS compliant versions are available
- 3 $\sigma$  lot norm screening performed on standby current ( $I_D$ )


### APPLICATIONS / BENEFITS

- Protection from switching transients and induced RFI
- Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4
- Secondary lightning protection per IEC 61000-4-5 with 42 ohms source impedance:  
Class 1,2,3,4,5: MPLAD18KP7.0A to 200CA
- Secondary lightning protection per IEC 61000-4-5 with 12 ohms source impedance:  
Class 1,2,3,4: MPLAD18KP7.0A to 200CA
- Secondary lightning protection per IEC 61000-4-5 with 2 ohms source impedance:  
Class 2,3: MPLAD18KP7.0A to 200CA  
Class 4: MPLAD18KP5.0 to 64CA
- Pin injection protection per RTCA/DO-160F for Waveform 4 (6.4/69  $\mu$ s at 25 °C)\*:  
Level 4: MPLAD18KP7.0A to 200CA  
Level 5: MPLAD18KP7.0A to 130CA
- Pin injection protection per RTCA/DO-160F for Waveform 5A (40/120  $\mu$ s at 25 °C)\*:  
Level 4: MPLAD18KP7.0A to 36CA

\*See [MicroNote 132](#) for further temperature derating selection.

*High-Reliability  
screening available in  
reference to  
MIL-PRF-19500*

*Tested in  
accordance with the  
requirements of  
AEC-Q101*

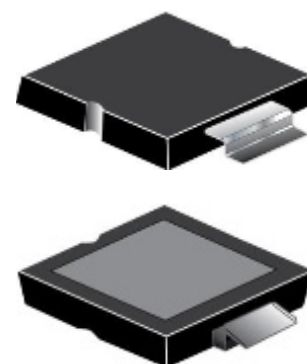

**PLAD**  
(The cathode is the metal base under the body of this device.)

# MPLAD18KP7.0A – MPLAD18KP200CA

## MAXIMUM RATINGS @ 25°C unless otherwise specified


| Symbol                              | Parameters / Test Conditions                            | Value       | Unit |
|-------------------------------------|---------------------------------------------------------|-------------|------|
| T <sub>J</sub> and T <sub>STG</sub> | Junction and Storage Temperature                        | -55 to +150 | °C/W |
| R <sub>θJA</sub>                    | Thermal Resistance Junction-to-Ambient <sup>(1)</sup>   | 50          |      |
| R <sub>θJC</sub>                    | Thermal Resistance Junction-to-Case                     | 0.7         |      |
| P <sub>PP</sub>                     | Peak Pulse Power @ 10/1000 μs <sup>(2)</sup>            | 18,000      | W    |
|                                     | t <sub>clamping</sub> (0 volts to V <sub>(BR min)</sub> |             |      |

- Notes:**
- When mounted on FR4 PC board with recommended mounting pad (see [pad layout](#)).
  - Also see [Figures 1 and 2](#). With impulse repetition rate (duty factor) of 0.05% or less.
  - At 8.3 ms half-sine wave (unidirectional devices only).
  - Case temperature controlled on heat sink as specified.
  - See [MicroNote 134](#) for derating  $P_{PP}$  when also applying steady-state power.

## MECHANICAL and PACKAGING

- CASE: Void-free transfer molded thermosetting epoxy body meeting UL94V-0
- TERMINALS: Tin-lead or RoHS compliant annealed matte-tin plating readily solderable per MIL-STD-750, method 2026.
- MARKING: Body marked with part number
- POLARITY: For unidirectional devices, the cathode is on the metal backside (package bottom)
- Available in bulk or custom tape-and-reel packaging
- TAPE-AND-REEL: Standard per EIA-481-B (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: Approximately 1 gram
- See [Package Dimensions](#) on last page.

## PART NOMENCLATURE

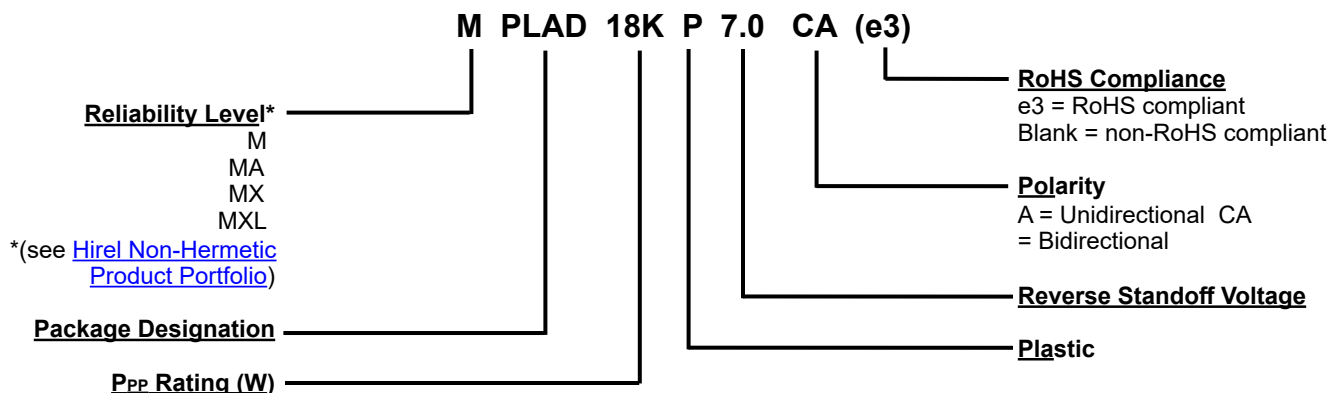

# MPLAD18KP7.0A – MPLAD18KP200CA

## SYMBOLS & DEFINITIONS

| Symbol           | Definition                                                                                                                                |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| $I_{(BR)}$       | Breakdown Current: The current used for measuring breakdown voltage $V_{(BR)}$ .                                                          |
| $I_D$            | Standby Current: The current at the rated standoff voltage $V_{WM}$ .                                                                     |
| $I_{PP}$         | Peak Impulse Current: The peak current during the impulse.                                                                                |
| $V_{(BR)}$       | Breakdown Voltage: The minimum voltage the device will exhibit at a specified current.                                                    |
| $V_C$            | Clamping Voltage: Clamping voltage at $I_{PP}$ (peak pulse current) at the specified pulse conditions (typically shown as maximum value). |
| $V_{WM}$         | Related Working Standoff Voltage: The maximum peak voltage that can be applied over the operating temperature range.                      |
| $\alpha_{V(BR)}$ | Temperature Coefficient of Breakdown Voltage: The change in breakdown voltage divided by change temperature.                              |

# MPLAD18KP7.0A – MPLAD18KP200CA

## ELECTRICAL CHARACTERISTICS @ 25°C unless otherwise specified


| MICROSEMI PART NUMBER |                | REVERSE<br>STANDOFF<br>VOLTAGE<br>V <sub>WM</sub><br>(Note 1) | BREAKDOWN<br>VOLTAGE<br>V <sub>(BR)</sub> @ I <sub>(BR)</sub> |     | MAXIMUM<br>CLAMPING<br>VOLTAGE<br>V <sub>C</sub> @ I <sub>PP</sub> | MAXIMUM<br>STANDBY<br>CURRENT<br>I <sub>D</sub> @ V <sub>WM</sub> | MAXIMUM<br>PEAK<br>PULSE<br>CURRENT<br>I <sub>PP</sub> (FIG. 3) | MAXIMUM<br>TEMPERATURE<br>COEFFICIENT<br>αV <sub>(BR)</sub> |
|-----------------------|----------------|---------------------------------------------------------------|---------------------------------------------------------------|-----|--------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------|
| Unidirectional        | Bidirectional  | Volts                                                         | Volts                                                         | mA  | Volts                                                              | μA                                                                | A                                                               | mV/ °C                                                      |
| MPLAD18KP7.0A         | MPLAD18KP7.0CA | 7.0                                                           | 7.78 – 8.60                                                   | 150 | 12.0                                                               | 3000                                                              | 1500*                                                           | 5.0                                                         |
| MPLAD18KP7.5A         | MPLAD18KP7.5CA | 7.5                                                           | 8.33 – 9.21                                                   | 5   | 12.9                                                               | 750                                                               | 1396*                                                           | 6.0                                                         |
| MPLAD18KP8.0A         | MPLAD18KP8.0CA | 8.0                                                           | 8.89 – 9.83                                                   | 5   | 13.6                                                               | 450                                                               | 1324*                                                           | 6.0                                                         |
| MPLAD18KP8.5A         | MPLAD18KP8.5CA | 8.5                                                           | 9.44 – 10.4                                                   | 5   | 14.4                                                               | 150                                                               | 1250*                                                           | 7.0                                                         |
| MPLAD18KP9.0A         | MPLAD18KP9.0CA | 9.0                                                           | 10.0 – 11.1                                                   | 5   | 15.4                                                               | 60                                                                | 1169*                                                           | 8.0                                                         |
| MPLAD18KP10A          | MPLAD18KP10CA  | 10                                                            | 11.1 – 12.3                                                   | 5   | 17.0                                                               | 45                                                                | 1059*                                                           | 9.0                                                         |
| MPLAD18KP11A          | MPLAD18KP11CA  | 11                                                            | 12.2 – 13.5                                                   | 5   | 18.2                                                               | 10                                                                | 989                                                             | 10                                                          |
| MPLAD18KP12A          | MPLAD18KP12CA  | 12                                                            | 13.3 – 14.7                                                   | 5   | 19.9                                                               | 10                                                                | 905                                                             | 11                                                          |
| MPLAD18KP13A          | MPLAD18KP13CA  | 13                                                            | 14.4 – 15.9                                                   | 5   | 21.5                                                               | 10                                                                | 838                                                             | 12                                                          |
| MPLAD18KP14A          | MPLAD18KP14CA  | 14                                                            | 15.6 – 17.2                                                   | 5   | 23.2                                                               | 10                                                                | 776                                                             | 13                                                          |
| MPLAD18KP15A          | MPLAD18KP15CA  | 15                                                            | 16.7 – 18.5                                                   | 5   | 24.4                                                               | 10                                                                | 738                                                             | 15                                                          |
| MPLAD18KP16A          | MPLAD18KP16CA  | 16                                                            | 17.8 – 19.7                                                   | 5   | 26.0                                                               | 10                                                                | 693                                                             | 16                                                          |
| MPLAD18KP17A          | MPLAD18KP17CA  | 17                                                            | 18.9 – 20.9                                                   | 5   | 27.6                                                               | 10                                                                | 653                                                             | 18                                                          |
| MPLAD18KP18A          | MPLAD18KP18CA  | 18                                                            | 20.0 – 22.1                                                   | 5   | 29.2                                                               | 10                                                                | 617                                                             | 19                                                          |
| MPLAD18KP20A          | MPLAD18KP20CA  | 20                                                            | 22.2 – 24.5                                                   | 5   | 32.4                                                               | 10                                                                | 556                                                             | 22                                                          |
| MPLAD18KP22A          | MPLAD18KP22CA  | 22                                                            | 24.4 – 26.9                                                   | 5   | 35.5                                                               | 10                                                                | 508                                                             | 24                                                          |
| MPLAD18KP24A          | MPLAD18KP24CA  | 24                                                            | 26.7 – 29.5                                                   | 5   | 38.9                                                               | 10                                                                | 463                                                             | 27                                                          |
| MPLAD18KP26A          | MPLAD18KP26CA  | 26                                                            | 28.9 – 31.9                                                   | 5   | 42.1                                                               | 10                                                                | 428                                                             | 29                                                          |
| MPLAD18KP28A          | MPLAD18KP28CA  | 28                                                            | 31.1 – 34.4                                                   | 5   | 45.5                                                               | 10                                                                | 396                                                             | 30                                                          |
| MPLAD18KP30A          | MPLAD18KP30CA  | 30                                                            | 33.3 – 36.8                                                   | 5   | 48.4                                                               | 10                                                                | 372                                                             | 35                                                          |
| MPLAD18KP33A          | MPLAD18KP33CA  | 33                                                            | 36.7 – 40.6                                                   | 5   | 53.3                                                               | 10                                                                | 338                                                             | 38                                                          |
| MPLAD18KP36A          | MPLAD18KP36CA  | 36                                                            | 40.0 – 44.2                                                   | 5   | 58.1                                                               | 10                                                                | 310                                                             | 40                                                          |
| MPLAD18KP40A          | MPLAD18KP40CA  | 40                                                            | 44.4 – 49.1                                                   | 5   | 64.5                                                               | 10                                                                | 280                                                             | 45                                                          |
| MPLAD18KP43A          | MPLAD18KP43CA  | 43                                                            | 47.8 – 52.8                                                   | 5   | 69.4                                                               | 10                                                                | 260                                                             | 49                                                          |
| MPLAD18KP45A          | MPLAD18KP45CA  | 45                                                            | 50.0 – 55.3                                                   | 5   | 72.7                                                               | 10                                                                | 248                                                             | 51                                                          |
| MPLAD18KP48A          | MPLAD18KP48CA  | 48                                                            | 53.3 – 58.9                                                   | 5   | 77.4                                                               | 10                                                                | 233                                                             | 55                                                          |
| MPLAD18KP51A          | MPLAD18KP51CA  | 51                                                            | 56.7 – 62.7                                                   | 5   | 82.4                                                               | 10                                                                | 219                                                             | 60                                                          |
| MPLAD18KP54A          | MPLAD18KP54CA  | 54                                                            | 60.0 – 66.3                                                   | 5   | 87.1                                                               | 10                                                                | 183 207                                                         | 64                                                          |
| MPLAD18KP58A          | MPLAD18KP58CA  | 58                                                            | 64.4 – 71.2                                                   | 5   | 93.6                                                               | 10                                                                | 193                                                             | 69                                                          |
| MPLAD18KP60A          | MPLAD18KP60CA  | 60                                                            | 66.7 – 73.7                                                   | 5   | 96.8                                                               | 10                                                                | 186                                                             | 70                                                          |
| MPLAD18KP64A          | MPLAD18KP64CA  | 64                                                            | 71.1 – 78.6                                                   | 5   | 103                                                                | 10                                                                | 175                                                             | 75                                                          |
| MPLAD18KP70A          | MPLAD18KP70CA  | 70                                                            | 77.8 – 86.0                                                   | 5   | 113                                                                | 10                                                                | 160                                                             | 84                                                          |
| MPLAD18KP75A          | MPLAD18KP75CA  | 75                                                            | 83.3 – 92.1                                                   | 5   | 121                                                                | 10                                                                | 149                                                             | 90                                                          |
| MPLAD18KP78A          | MPLAD18KP78CA  | 78                                                            | 86.7 – 95.8                                                   | 5   | 126                                                                | 10                                                                | 143                                                             | 94                                                          |
| MPLAD18KP85A          | MPLAD18KP85CA  | 85                                                            | 94.4 – 104.0                                                  | 5   | 137                                                                | 10                                                                | 132                                                             | 102                                                         |
| MPLAD18KP90A          | MPLAD18KP90CA  | 90                                                            | 100 – 111                                                     | 5   | 146                                                                | 10                                                                | 124                                                             | 109                                                         |
| MPLAD18KP100A         | MPLAD18KP100CA | 100                                                           | 111 – 123                                                     | 5   | 162                                                                | 10                                                                | 112                                                             | 122                                                         |
| MPLAD18KP110A         | MPLAD18KP110CA | 110                                                           | 122 – 135                                                     | 5   | 177                                                                | 10                                                                | 102                                                             | 132                                                         |
| MPLAD18KP120A         | MPLAD18KP120CA | 120                                                           | 133 – 147                                                     | 5   | 193                                                                | 10                                                                | 94                                                              | 145                                                         |
| MPLAD18KP130A         | MPLAD18KP130CA | 130                                                           | 144 – 159                                                     | 5   | 209                                                                | 10                                                                | 87                                                              | 157                                                         |
| MPLAD18KP150A         | MPLAD18KP150CA | 150                                                           | 167 – 185                                                     | 5   | 243                                                                | 10                                                                | 75                                                              | 183                                                         |
| MPLAD18KP160A         | MPLAD18KP160CA | 160                                                           | 178 – 197                                                     | 5   | 259                                                                | 10                                                                | 70                                                              | 195                                                         |
| MPLAD18KP170A         | MPLAD18KP170CA | 170                                                           | 189 – 209                                                     | 5   | 275                                                                | 10                                                                | 66                                                              | 207                                                         |
| MPLAD18KP180A         | MPLAD18KP180CA | 180                                                           | 200 – 221                                                     | 5   | 291                                                                | 10                                                                | 62                                                              | 219                                                         |
| MPLAD18KP200A         | MPLAD18KP200CA | 200                                                           | 222 – 245                                                     | 5   | 322                                                                | 10                                                                | 56                                                              | 243                                                         |

**NOTE 1:** Transient Voltage Suppressors are normally selected with reverse standoff voltage V<sub>WM</sub>, which should be equal to or greater than the peak operating voltage.


\* Surge Testing is performed to 1000Amps due to equipment limitations.

# MPLAD18KP7.0A – MPLAD18KP200CA

## GRAPHS

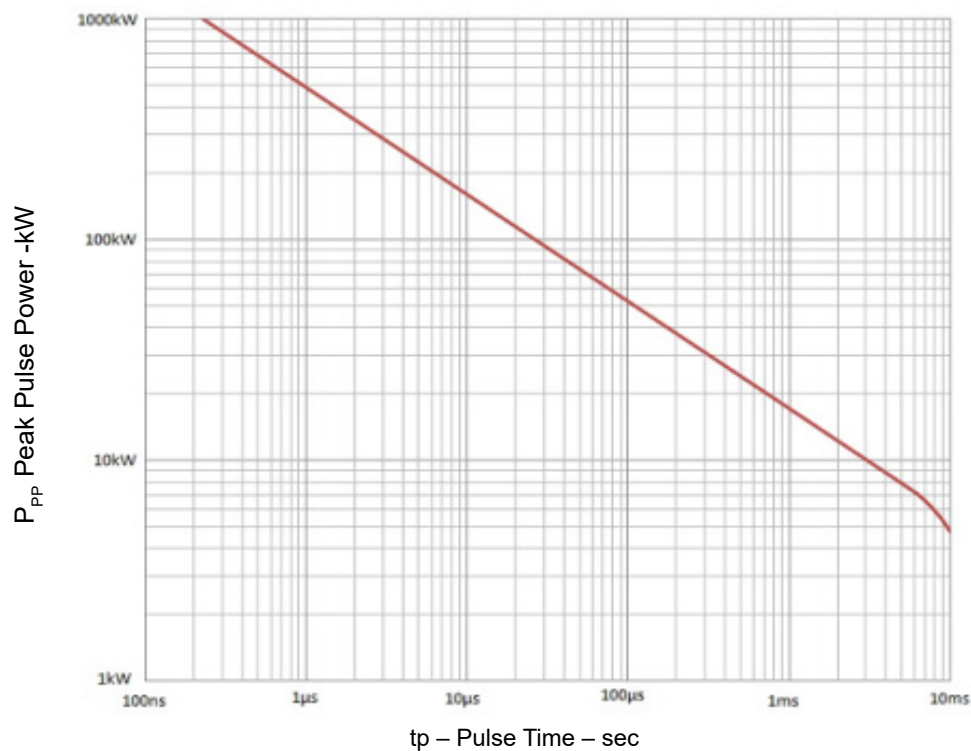


**Figure 1**  
 Peak Pulse Power vs. Pulse Time  
 (to 50% of exponentially decaying pulse)

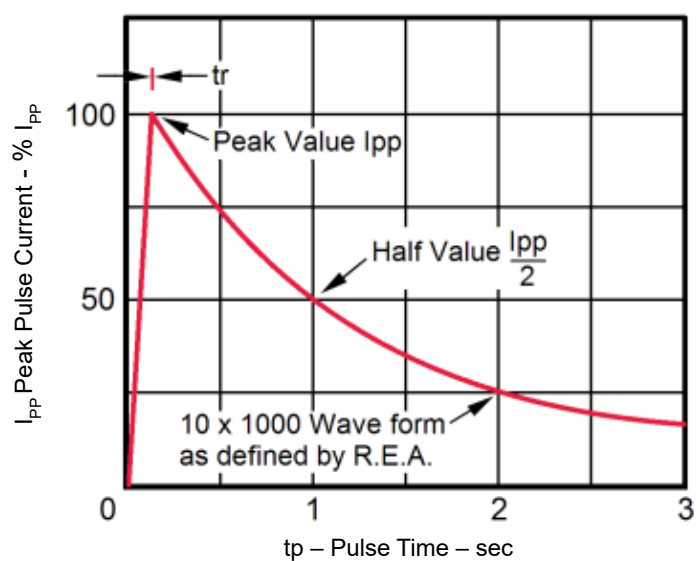

**Figure 2**  
 Pulse Waveform  
 Test waveform parameters:  $t_r = 10 \mu s$ ,  $t_p = 1000 \mu s$

# MPLAD18KP7.0A – MPLAD18KP200CA


## GRAPHS (continued)

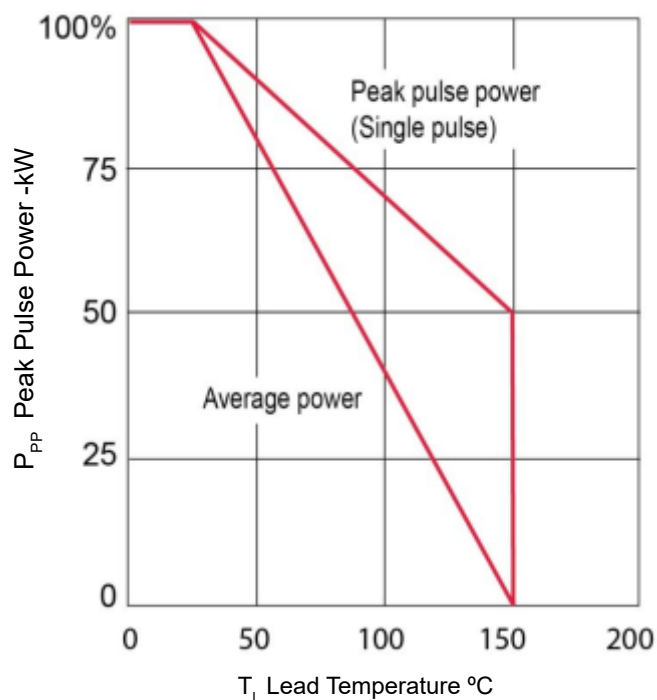

**Figure 3**  
Derating Curve


# MPLAD18KP7.0A – MPLAD18KP200CA

## PACKAGE DIMENSIONS

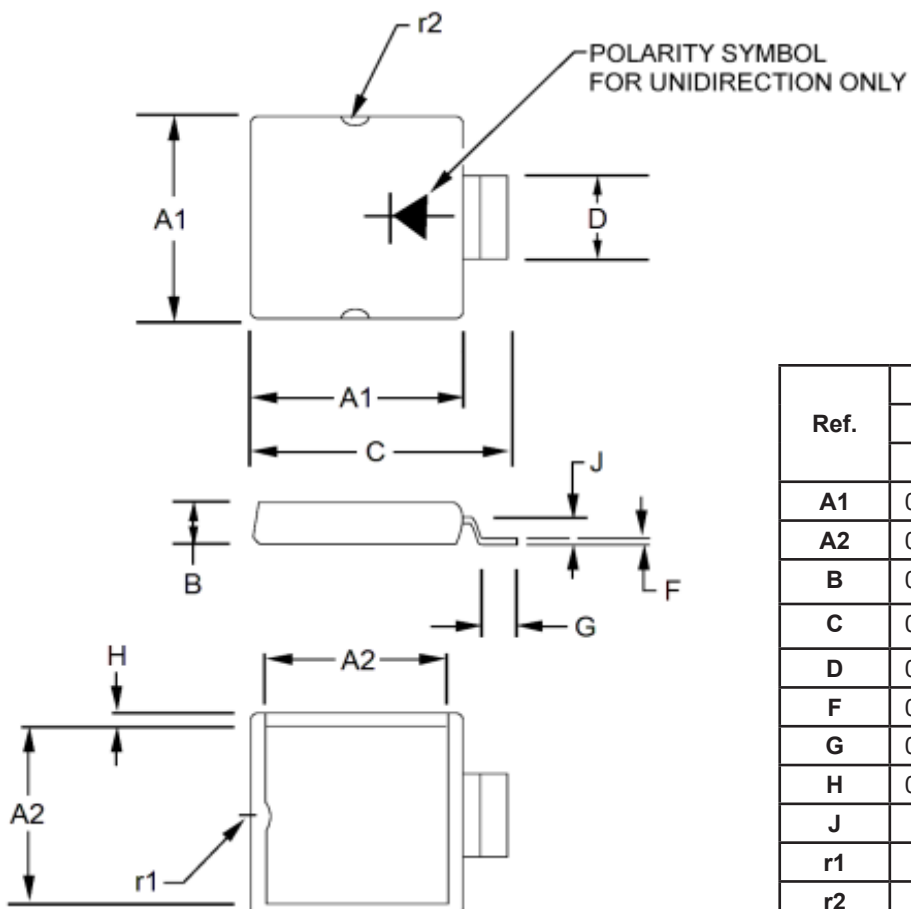

| Ref. | Dimensions |       |             |       |
|------|------------|-------|-------------|-------|
|      | Inch       |       | Millimeters |       |
|      | Min        | Max   | Min         | Max   |
| A1   | 0.485      | 0.495 | 12.32       | 12.57 |
| A2   | 0.415      | 0.425 | 10.54       | 10.80 |
| B    | 0.145      | 0.155 | 3.68        | 3.94  |
| C    | 0.585      | 0.595 | 14.86       | 15.11 |
| D    | 0.200      | 0.210 | 5.08        | 5.33  |
| F    | 0.008      | 0.013 | 0.20        | 0.33  |
| G    | 0.055      | 0.065 | 1.40        | 1.65  |
| H    | 0.015      | 0.025 | 0.38        | 0.64  |
| J    | 0.062 TYP  |       | 1.57 TYP    |       |
| r1   | 0.030 TYP  |       | 0.76 TYP    |       |
| r2   | 0.045 TYP  |       | 1.14 TYP    |       |

## PAD LAYOUT

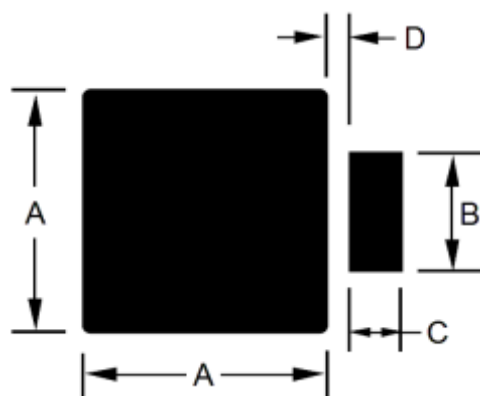

| Ref. | Dimensions |             |
|------|------------|-------------|
|      | Inch       | Millimeters |
|      | Typical    | Typical     |
| A    | 0.470      | 11.94       |
| B    | 0.230      | 5.85        |
| C    | 0.100      | 2.44        |
| D    | 0.045      | 1.15        |

# MPLAD18KP7.0A – MPLAD18KP200CA



**Microsemi Corporate Headquarters**  
One Enterprise, Aliso Viejo, CA 92656 USA  
Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Sales: +1 (949) 380-6136  
Fax: +1 (949) 215-4996  
Email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

©2016 Microsemi Corporation. All rights reserved.  
Microsemi and the Microsemi logo are registered  
trademarks of Microsemi Corporation. All other  
trademarks and service marks are the property of  
their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com)

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.